
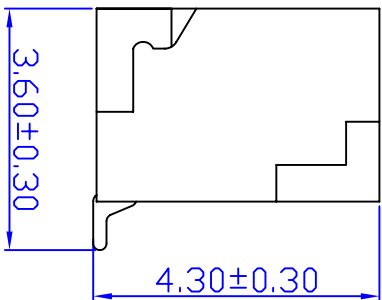



REV	DESCRIPTION	MARK
X1	First edition	

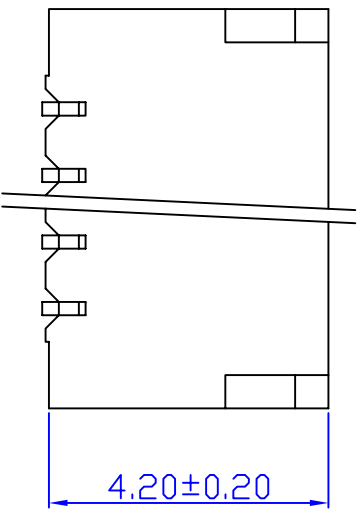

性能:

额定电流: 0.5A

额定电压: 100V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

塑件 (材质): PA46

插簧 (材质): 磷青铜, 镀锡

焊片 (材质): 磷青铜, 镀锡

PEC管理规定:

- 禁止使用含有SS-00259所限制的物质。
- 对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表，在一年有效期内。

孔位	A	B	C
2	1.00	4.00	3.20
3	2.00	5.00	4.20
4	3.00	6.00	5.20
5	4.00	7.00	6.20
6	5.00	8.00	7.20
7	6.00	9.00	8.20
8	7.00	10.00	9.20
9	8.00	11.00	10.20
10	9.00	12.00	11.20
11	10.00	13.00	12.20
12	11.00	14.00	13.20
13	12.00	15.00	14.20
14	13.00	16.00	15.20
15	14.00	17.00	16.20

PCB Layout

 深 圳 市 诚 得 信 电 子 有 限 公 司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: 1. 0T-1-nAB		
X. ±	X' ±	MAT'L	USE:		PART NO:	
.X ± 0.25	.X' ±		APPD:			
.XX ± 0.10	.XX' ±	FINISH		DWG NO.:		
.XXX ±	.XXX' ±	CHKD:				
UNITS: mm	Q'TY /	DR:	邓琴			
		SCALE 1:1		SHEET 1/1	REV. X1	