
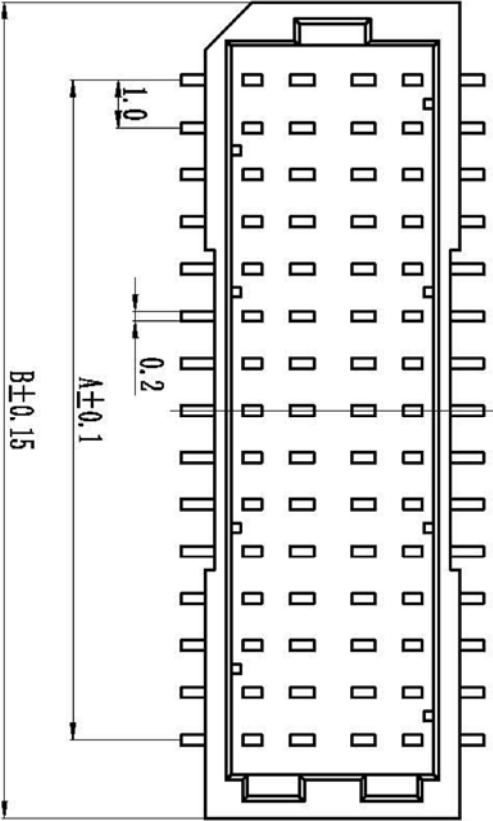
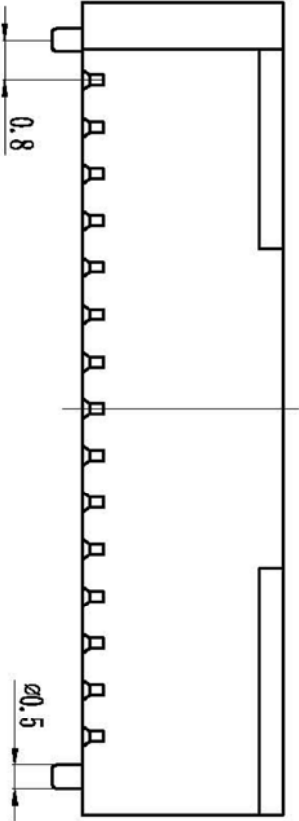


REV	DESCRIPTION	MARK
X1	First edition	

性能:

额定电流: 0.5A
额定电压: 100V
耐电压: 500V
接触电阻: 30mΩ
绝缘电阻: 500MΩ
工作温度: -20℃~+85℃
塑件 (材质): PA46
插簧 (材质): 磷青铜, 镀锡
焊片 (材质): 磷青铜, 镀锡

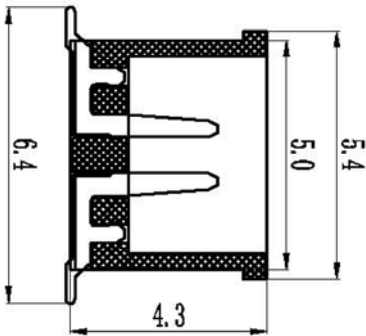

孔位	型号	A	B
12	SHD-12AB	5.00	9.10
16	SHD-16AB	7.00	11.10
20	SHD-20AB	9.00	13.10
30	SHD-30AB	14.00	18.10
40	SHD-40AB	19.00	23.10
50	SHD-50AB	24.00	28.10

				深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: SHD1. 0T-2XnAB				
X. ±		X' ±		MAT'L		USE:		PART NO.:				
.X ± 0.25		.X' ±				APPD:						
.XX ± 0.10		.XX' ±		FINISH		CHKD:		DWG NO.:				
.XXX ±		.XXX' ±										
		UNITS: mm		Q'TY		DR: 邓琴		SCALE 1:1		SHEET 1/1		
								REV. X1				