
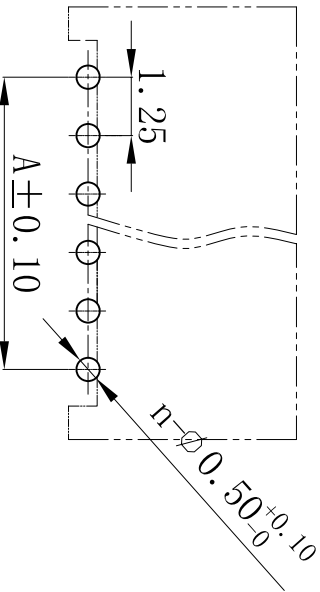
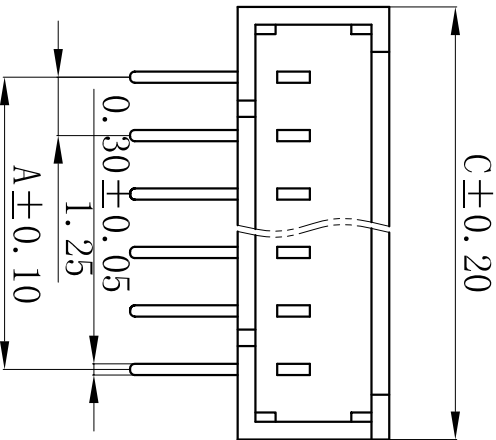
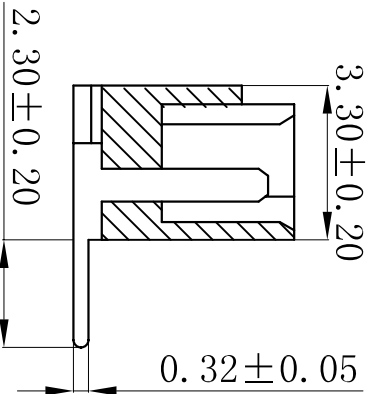


| REV | DESCRIPTION   | MARK |
|-----|---------------|------|
| X1  | first edition |      |

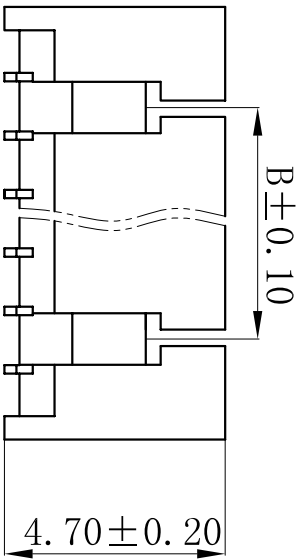

性能:

额定电流: 1.0A

额定电压: 150V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

塑件(材质): LCP, UL94V-0

插针(材质): 黄铜, 镀锡

| 孔位 | A     | B     | C     |
|----|-------|-------|-------|
| 2  | 1.25  | 0.00  | 4.35  |
| 3  | 2.50  | 1.25  | 5.60  |
| 4  | 3.75  | 2.50  | 6.85  |
| 5  | 5.00  | 3.75  | 8.10  |
| 6  | 6.25  | 5.00  | 9.35  |
| 7  | 7.50  | 6.25  | 10.60 |
| 8  | 8.75  | 7.50  | 11.85 |
| 9  | 10.00 | 8.75  | 13.10 |
| 10 | 11.25 | 10.00 | 14.35 |
| 11 | 12.50 | 11.25 | 15.60 |
| 12 | 13.75 | 12.50 | 16.85 |
| 13 | 15.00 | 13.75 | 18.10 |
| 14 | 16.25 | 15.00 | 19.35 |
| 15 | 17.50 | 16.25 | 20.60 |



深圳市诚得信电子有限公司  
SHENZHEN CHENGDEXIN ELECTRONICS CO., LTD

PART NO.: 1.25T-1-nAW

X. ±

X. ±

MAT'L

CUS PART NO.:

.X ± 0.1

.X ± 0.1°

FINISH

DATE

VERSION

.XX ± 0.05

.XX ± 0.05°

CHKD:

SCALE

REV.

.XXX ±


.XXX ±

DR:

SHEET

1/1

PCB LAYOUT



UNITS: mm

QTY

1:1

XI