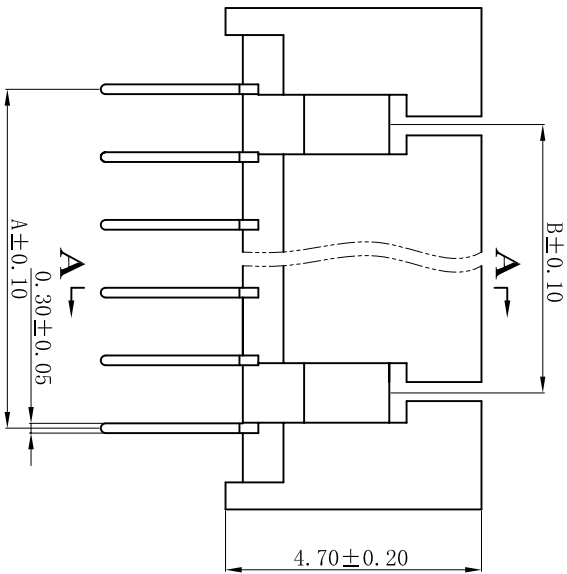


性能:

额定电流: 1.0A
额定电压: 150V
耐电压: 500V
接触电阻: 30mΩ
绝缘电阻: 500MΩ
工作温度: -20℃~+85℃

塑件 (材质): LCP, UL94V-0
插针 (材质): 黄铜, 镀锡

孔位	A	B	C
2	1.25	0.00	4.35
3	2.50	1.25	5.60
4	3.75	2.50	6.85
5	5.00	3.75	8.10
6	6.25	5.00	9.35
7	7.50	6.25	10.60
8	8.75	7.50	11.85
9	10.00	8.75	13.10
10	11.25	10.00	14.35
11	12.50	11.25	15.60
12	13.75	12.50	16.85
13	15.00	13.75	18.10
14	16.25	15.00	19.35
15	17.50	16.25	20.60

CCCOX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO., LTD				PART NO.: 1.25T-1-nA			
X. ±	X.° ±	MAT'L	APPD:	CUS PART NO.:			
.X ± 0.1	.X° ± 0.1°	✓					
.XX ± 0.05	.XX° ± 0.05°	FINISH	CHKD:	DATE			
.XXX ±	.XXX° ±	✓		VERSION			
UNITS:	Q'TY	DR: 邓琴	SCALE 1:1	SHEET 1/1	REV. XI		