
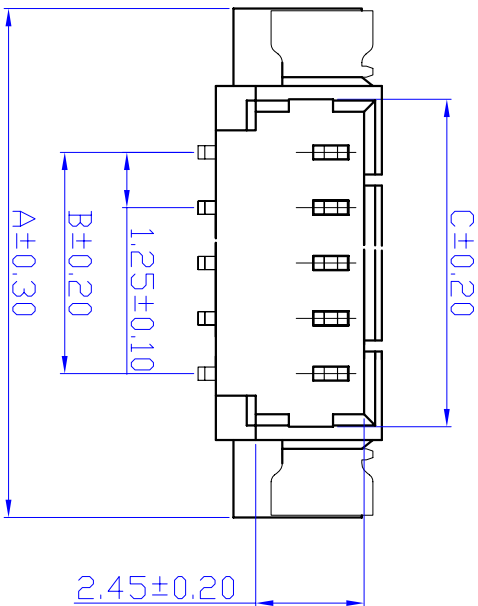

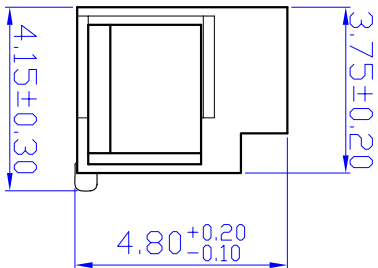


REV	DESCRIPTION	MARK
X1	first edition	

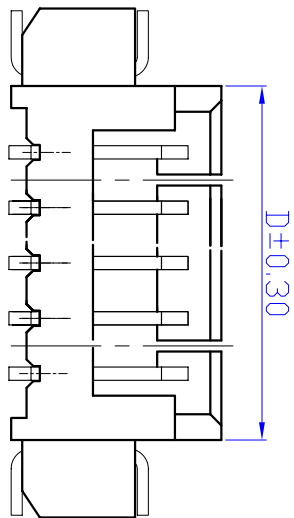

性能:

额定电流: 1.0A

额定电压: 150V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

塑件 (材质): LCP, UL94V-0


插簧 (材质): 磷青铜, 镀锡

焊片 (材质): 磷青铜, 镀锡

PEC管理规定:

- 禁止使用含有SS-00259所限制的物质。
- 对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表, 在一年有效期内。

孔位	A	B	C	D
2	7.75	1.25	3.65	4.25
3	9.00	2.50	4.90	5.50
4	10.25	3.75	6.15	6.75
5	11.50	5.00	7.40	8.00
6	12.75	6.25	8.65	9.25
7	14.00	7.50	9.90	10.50
8	15.25	8.75	11.15	11.75
9	16.50	10.00	12.40	13.00
10	17.75	11.25	13.65	14.25
11	19.00	12.50	14.90	15.50
12	20.25	13.75	16.15	16.75
13	21.50	15.00	17.40	18.00
14	22.75	16.25	18.65	19.25
15	24.00	17.50	19.90	20.50

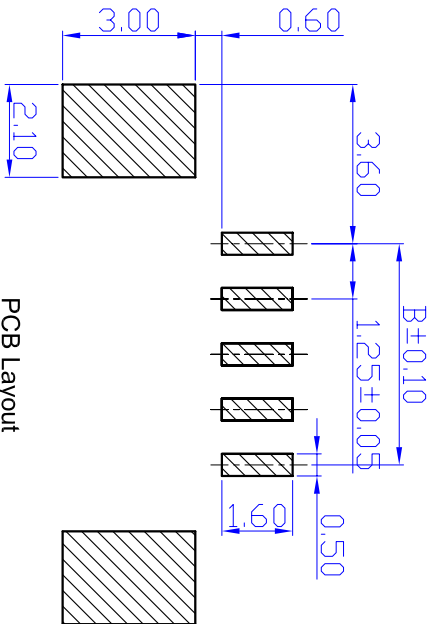

PCB Layout

 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO.: 1.25T-1-nAB			
X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:			
.X ± 0.1	X. ± 0.1*	✓					
.XX ± 0.05	.XX. ± 0.05*	FINISH	CHKD:	DATE			
.XXX ±	.XXX. ±	✓		VERSION			
	UNITS: mm	Q'TY	DR: 邓琴	SCALE 1:1		SHEET 1/1	REV. X1