
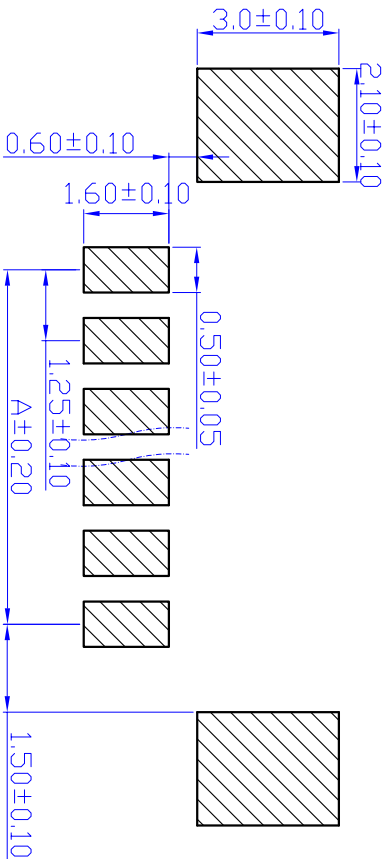
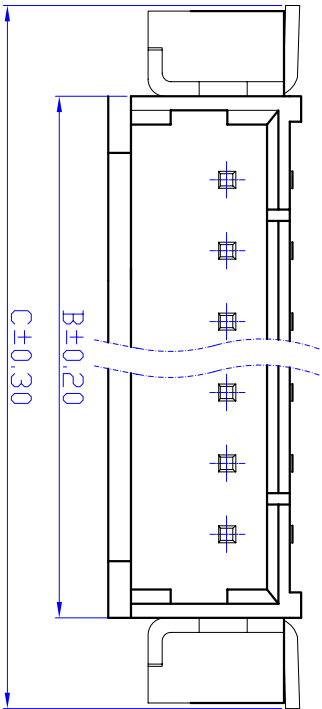
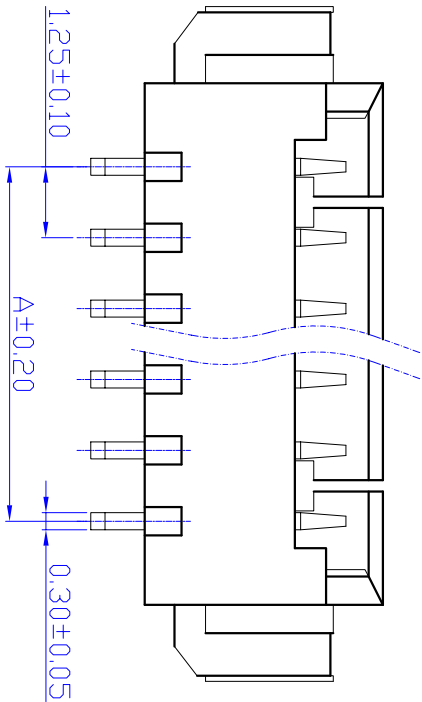


REV	DESCRIPTION	MARK
X1	First edition	

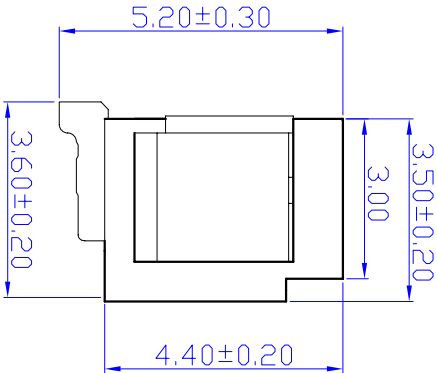

PCB Layout

性能:

额定电流: 1.0A
额定电压: 150V
耐电压: 500V
绝缘电阻: 500MΩ
接触电阻: 30mΩ
工作温度: -20℃~+85℃

材质:

塑件 (材质): PA46, UL94V-0;
插簧 (材质): 磷青铜, 镀锡;
焊片 (材质): 磷青铜, 镀锡;

孔位	A	B	C
2	1.25	4.20	7.50
3	2.50	5.45	8.75
4	3.75	6.70	10.00
5	5.00	7.95	11.25
6	6.25	9.20	12.50
7	7.50	10.45	13.75
8	8.75	11.70	15.00
9	10.00	12.95	16.25
10	11.25	14.20	17.50
11	12.50	15.45	18.75
12	13.75	16.70	20.00
13	15.00	17.95	21.25
14	16.25	19.20	22.50
15	17.50	20.45	23.75

CCOXX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD			TITLE: 1.25T-1-nAWB		
X. ±	X' ±	MAT'L	USE:		
.X ± 0.25	X' ±		APPD:		
.XX ± 0.10	.XX' ±	FINISH	CHKD:		
.XXX ±	.XXX' ±		DRI: 邓琴		
UNIT: mm	UNIT: mm	Q'TY	SCALE 1/1		
			SHEET 1/1		
			REV. X1		