

REV	DESCRIPTION	MARK
X1	first edition	

孔位	A	B
----	---	---





2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

■ SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1A, AC, DC(AWG#26)
- Withstanding Voltage:500V AC/minute
- Insulation resistance:500M Ω /min
- Temperature range:-25℃ - +85℃
- Contact resistance:20m Ω

■ WAFER

- Poles: 02-16
 - Material:Contact:Brass, Tin plated
 - Q'TY: 1000 pcs/bag
- Base: Nylon 66, UL94V-0

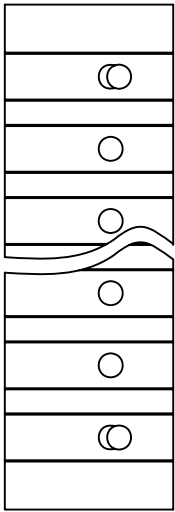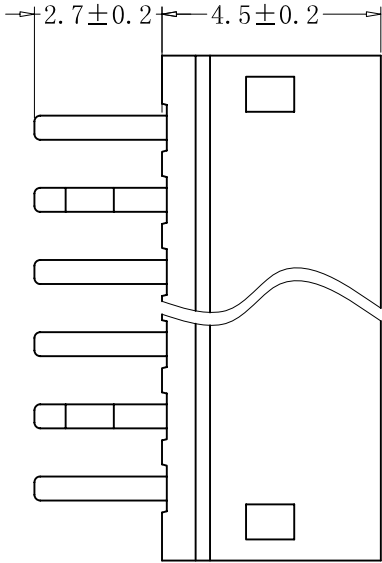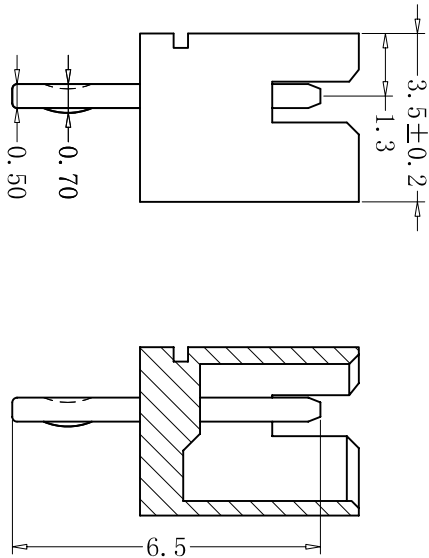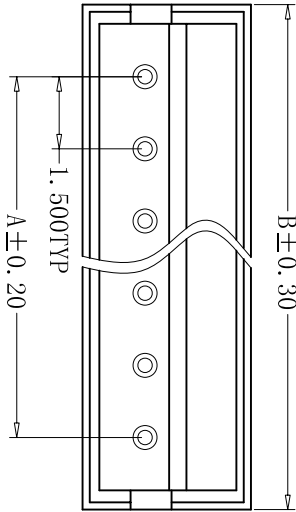

CCCOX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD		PART NO.: 1.5T-1-nA
--	--	---------------------

X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:
.X ± 0.1	.X ± 0.1°	✓		
.XX ± 0.05	.XX ± 0.05°	FINISH	CHKD:	DATE
.XXX ±	.XXX ±	✓		VERSION
UNITS:	Q'TY	DR:	SCALE	SHEET
mm	1	邓琴	1:1	1/1
			REV.	X1