
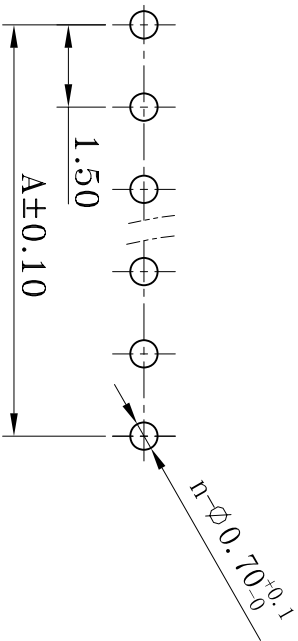
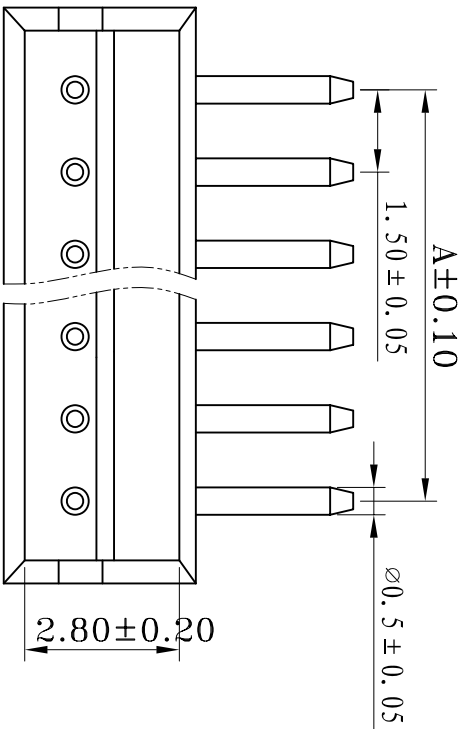
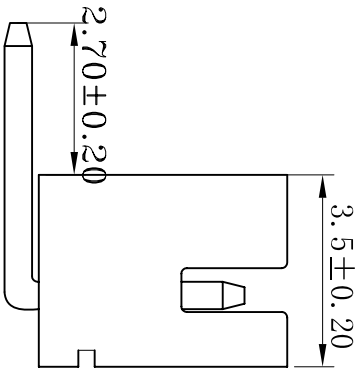


REV	DESCRIPTION	MARK
X1	first edition	

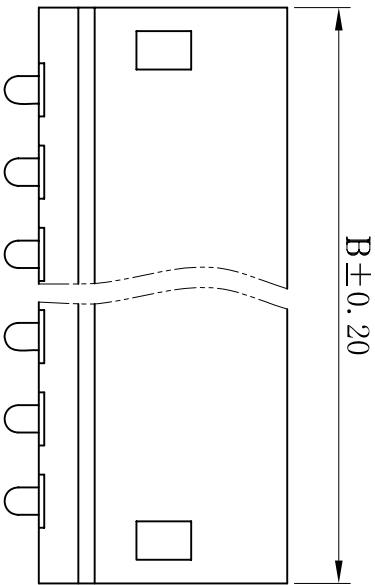

SPECIFICATIONS

- Voltage rating: 150V AC, DC
- Current rating: 1A, AC, DC (AWG#26)
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500M Ω /min
- Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
- Contact resistance: 20m Ω

WAFER

- Poles: 02-16
- Material: Contact: Brass, Tin plated
Base: Nylon 66, UL94V-0
- Q'TY: 1000 pcs/bag

孔位	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

CCCOX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD			PART NO.: 1.5T-1-nAW		
X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:	
.X ± 0.1	.X ± 0.1 $^{\circ}$	✓			
.XX ± 0.05	.XX ± 0.05 $^{\circ}$	FINISH	CHKD:	DATE	
.XXX ±	.XXX ±	✓		VERSION	
UNIT'S: 	UNIT'S: 	Q'TY	DR: 邓琴	SCALE 1:1	SHEET 1/1
				REV. X1	

PCB Layout