
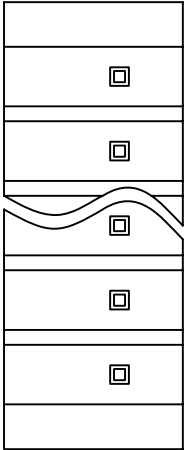
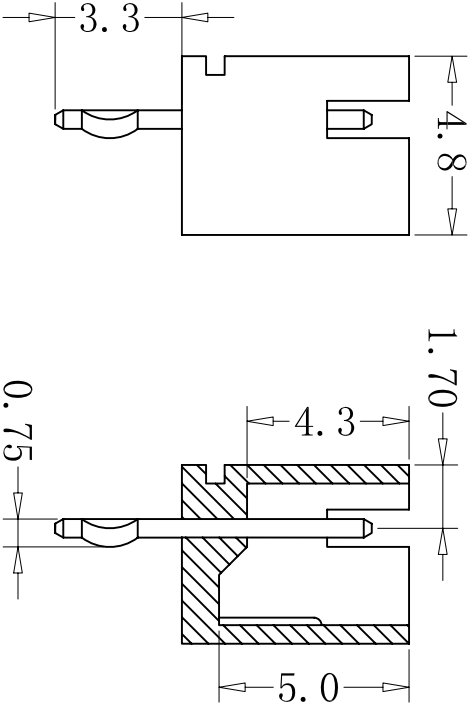
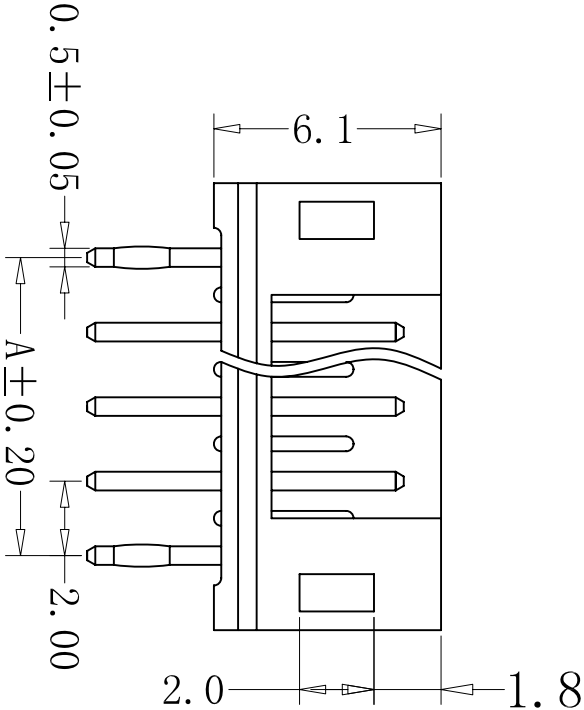


REV	DESCRIPTION	MARK
X1	first edition	

SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 2A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 100MΩ/min
 - Temperature range: -25°C - +85
(including temperature rise in applying electrical current)
 - Contact resistance: 30mΩ max
- WAFER
- Poles: 2-16
 - Material: Nylon 66, UL94V-0
 - Brass Tin-plating
 - Q'TY: 500 , 1000 pcs/bag

CUS PART No.	PIN	DIMENSION (mm)	
		A	B
331-0320181G0000	2	2.00	6.00
331-0420181G0000	3	4.00	8.00
331-0420181G0000	4	6.00	10.00
331-0520181G0000	5	8.00	12.00
331-0620181G0000	6	10.00	14.00
	7	12.00	16.00
	8	14.00	18.00
331-0920181G0000	9	16.00	20.00
	10	18.00	22.00
	11	20.00	24.00
	12	22.00	26.00
	13	24.00	28.00
	14	26.00	30.00
331-1520181G0000	15	28.00	32.00
	16	30.00	34.00

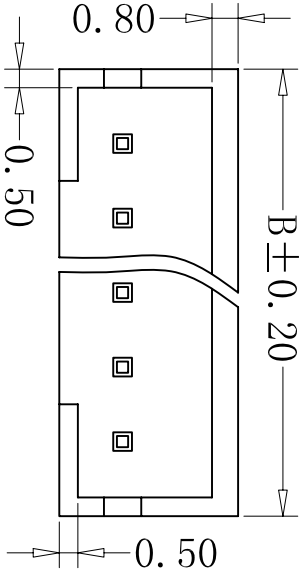

CCCOX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO.: PH-nA		
X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:		
.X ± 0.20	.X ± 0.1°	✓				
.XX ± 0.10	.XX ± 0.05°	FINISH	CHKD:			
.XXX ±	.XXX ±	✓				
UNITS: mm	Q'TY	DR: 邓琴	SCALE 1:1	SHEET 1/1	REV. X1	