

REV	DESCRIPTION	MARK
X1	First edition	

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:100MΩ/min
- Temperature range: -25℃ - +85℃
(including temperature rise in applying electrical current)
- Contact resistance: 30mΩ max

WAFER

- Poles: 2-16
- Material: Nylon 66, UL94V-0
Brass Tin-plating
- Q'TY: 1000 pcs/bag

PIN	DIMENSION (mm)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00

SECTION A-A

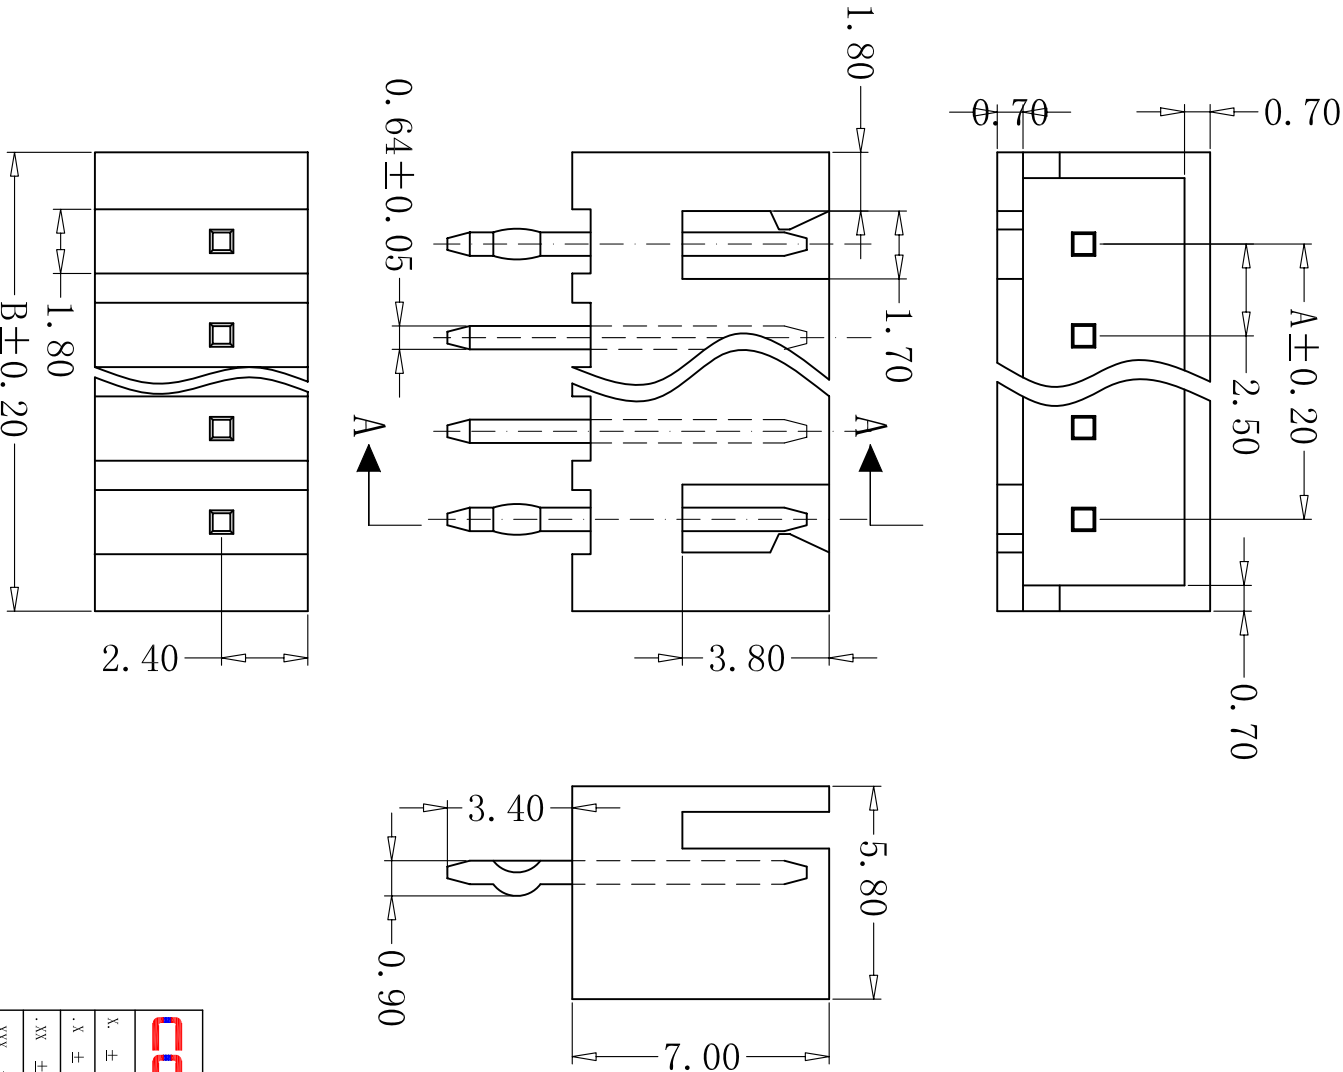

CCCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: XH-nA		
X. ±	X. ±	MAT'L	USE:	PART NO.:		
.X ± 0.25	.X' ±	FINISH	APPD:	DWG. NO.:		
.XX ± 0.15	.XX' ±	CHKD:	DR:	SCALE		
.XXX ± 0.05	.XXX' ±	Q'TY	刘婷	1:1	SHEET 1/1	REV. X1