

REV	DESCRIPTION	MARK
X1	first edition	





SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 100MΩ/min
 - Temperature range: -25°C ~ +85°C
- (including temperature rise in applying electrical current)
- Contact resistance: 30mΩ max

WAFER

- Poles: 2-16
- Material: Nylon 66, UL94V-0
- Brass Tin-plating
- Q' TY: 1000 pcs/bag

Poles	A	B	C
2 A	2.5	7.5	4.00
3 A	5.0	10.0	3.30
4 A	7.5	12.5	5.72
5 A	10.0	15.0	8.22
6 A	12.5	17.5	10.72
7 A	15.0	20.0	13.22
8 A	17.5	22.5	15.72
9 A	20.0	25.0	18.22
10A	22.5	27.5	20.72
11A	25.0	30.0	23.22
12A	27.5	32.5	25.72
13A	30.0	35.0	28.22
14A	32.5	37.5	30.72
15A	35.0	40.0	33.72
16A	37.5	42.5	35.72

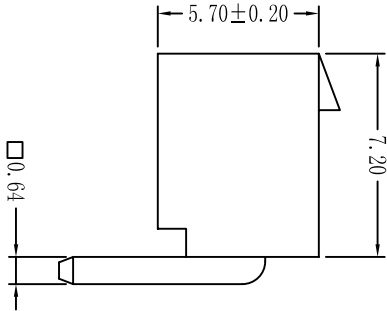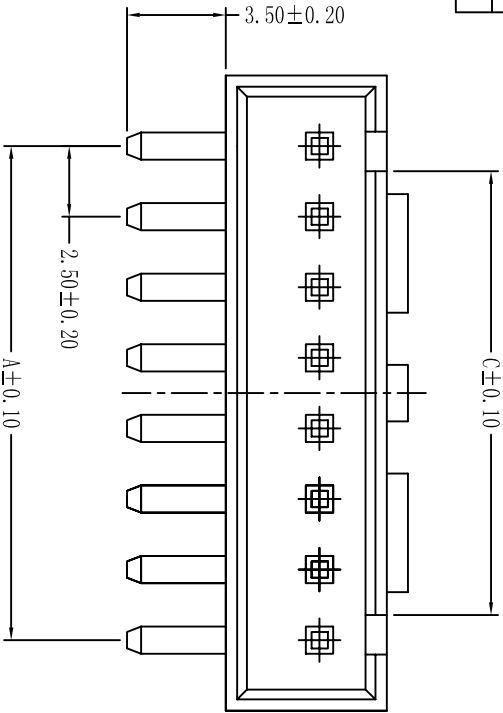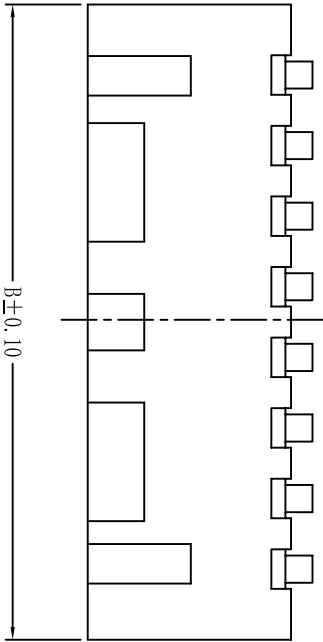

PCB LAYOUT

CCDOX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: XHS-nAW		
X. ±	X. ±	MAT' L	USE:	PART NO.:		
.X ± 0.2	.X' ±	／	APPD:	DWG. NO.:		
.XX ± 0.1	.XX' ±	FINISH	CHKD:			
.XXX ±	.XXX' ±	／	DR: 邓琴	SCALE 1:1	SHEET 1/1	REV. X1
	UNITS: mm	Q' TY				