
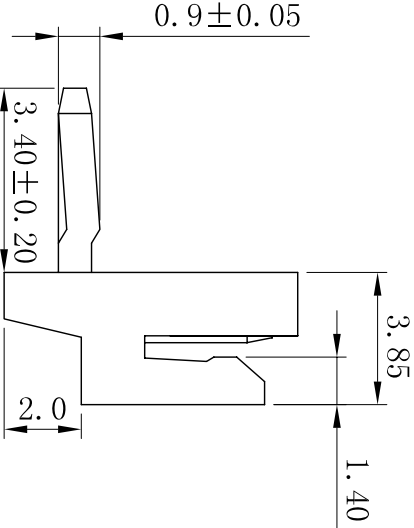


REV	DESCRIPTION	MARK
X1	first edition	

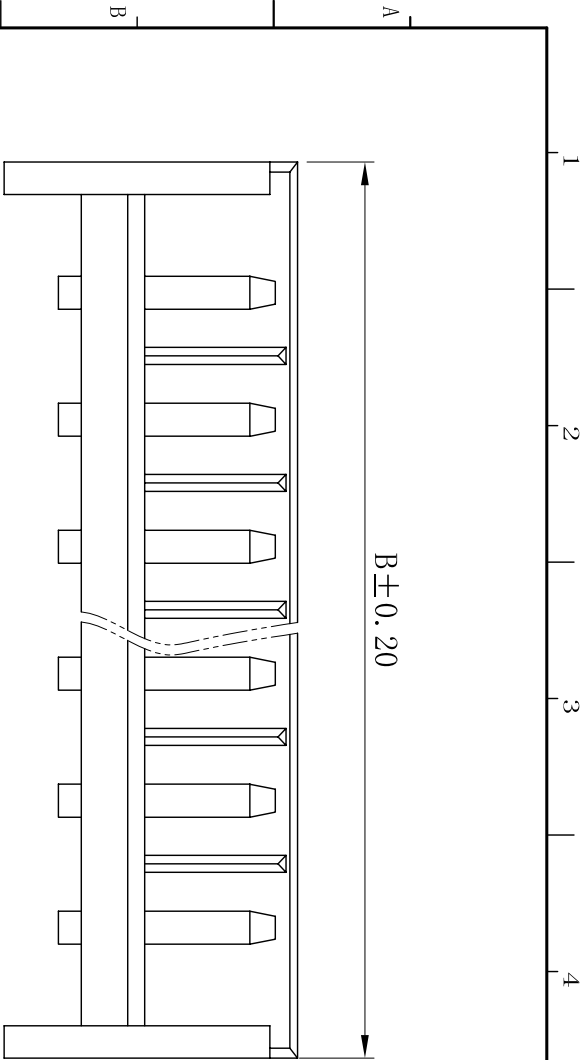

∅0.64±0.05

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000M Ωmin
- Temperature range: -25°C - +85°C


(including temperature rise in applying electrical current)

- Contact resistance: 30mΩ max

WAFER

- Poles: 2-15
- Material: Nylon 66, UL94V-0
- Brass Tin-plating
- Q'TV: 500 , 1000 pcs/bag

孔位	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

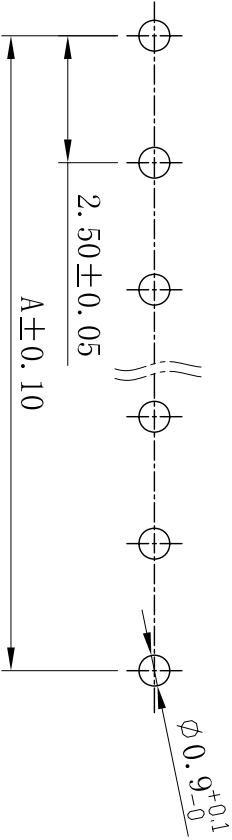

PCB LAYOUT

CCDOX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: EH-nAWD		
X. ±	X. ±	MAT'L	USE:	PART NO.:		
.X ± 0.2	.X' ±	FINISH	APPD:	DWG NO.:		
.XX ± 0.1	.XX' ±	CHKD:	DR:	SCALE		
.XXX ±	.XXX' ±	Q'TV	邓琴	1:1	SHEET 1/1	REV. X1