
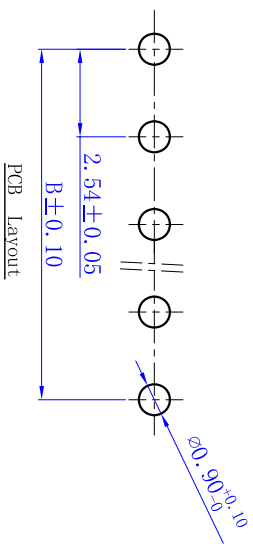
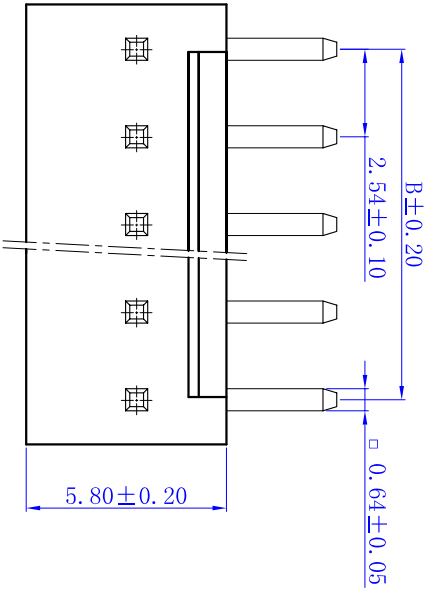


REV	DESCRIPTION	MARK
X1	first edition	

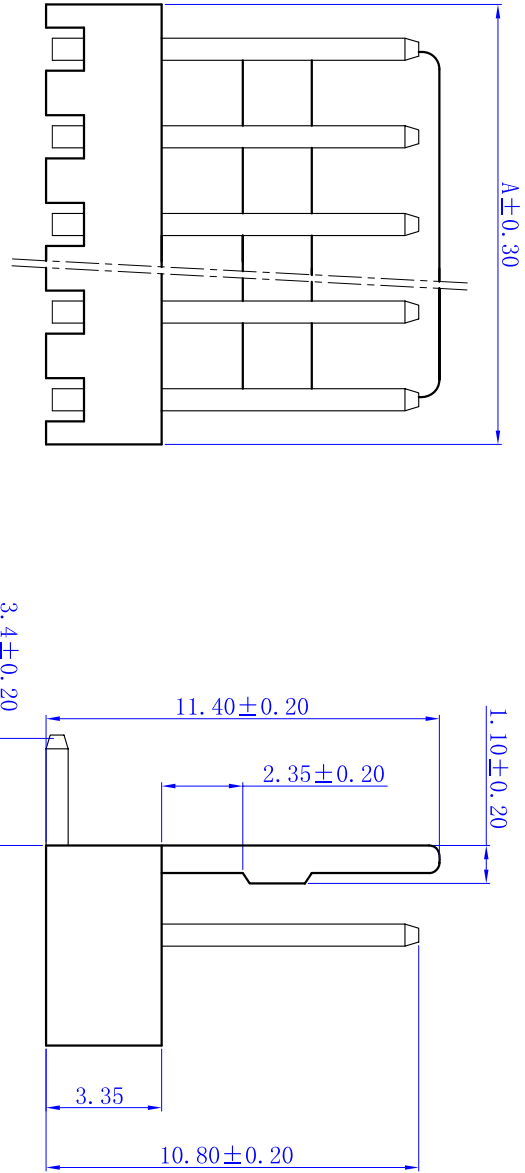

性能:

额定电流: 3.0A
额定电压: 250V
耐压: 1000V
绝缘电阻: 1000M Ω
接触电阻: 30m Ω
工作温度: -40 $^{\circ}$ C~+85 $^{\circ}$ C
塑件 (材质): PA66 UL94V-0;
插针 (材质): 黄铜, 镀锡;

PBC管理规定:

- 禁止使用含有SS-00259所限制的物质。
- 对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表, 在一年有效期内。

孔位	A	B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48
14	35.56	33.02
15	38.10	35.56
16	40.64	38.10
17	43.18	40.64
18	45.72	43.18
19	48.26	45.72
20	50.80	48.26

CCCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD		PART NO.: 2510-nAW
X. $\pm$	X. $\pm$	APPD:
.X $\pm$ 0.1	.X $\pm$ 0.1 $^{\circ}$	CU5 PART NO.:
.XX $\pm$ 0.05	.XX $\pm$ 0.05 $^{\circ}$	DATE
.XXX $\pm$	.XXX $\pm$	VERSION
UNITS: mm	Q' TV	DR: 邓琴
SCALE 1:1	SHEET 1/1	REV. XI