

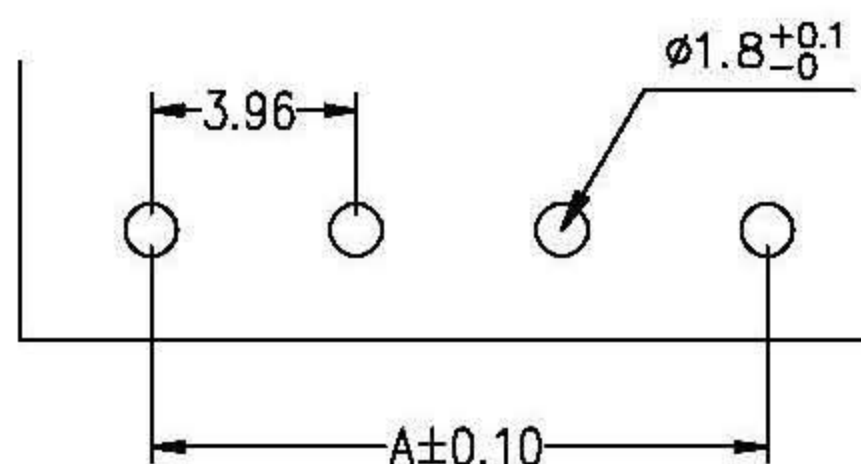
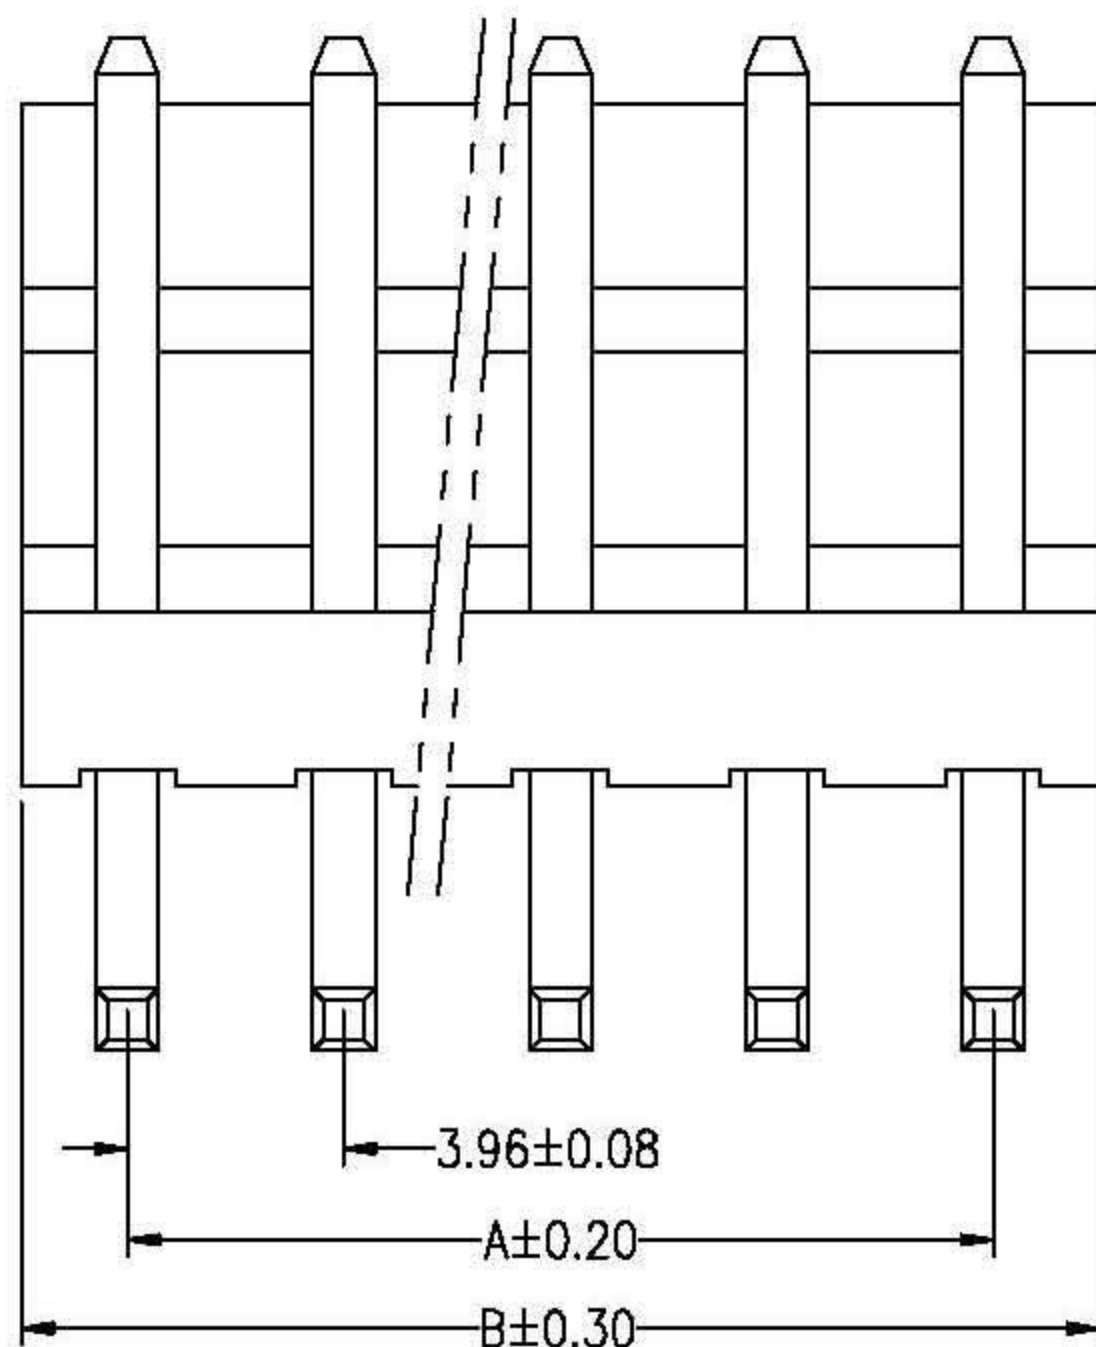


Poles	A	B
2A	3.96	7.92
3A	7.92	11.88
4A	11.88	15.84
5A	15.84	19.80
6A	19.80	23.76
7A	23.76	27.72
8A	27.72	31.68
9A	31.68	35.64
10A	35.64	39.60
11A	39.60	43.56
12A	43.56	47.52
13A	47.52	51.48
14A	51.48	55.44
15A	55.44	59.40
16A	59.40	63.36

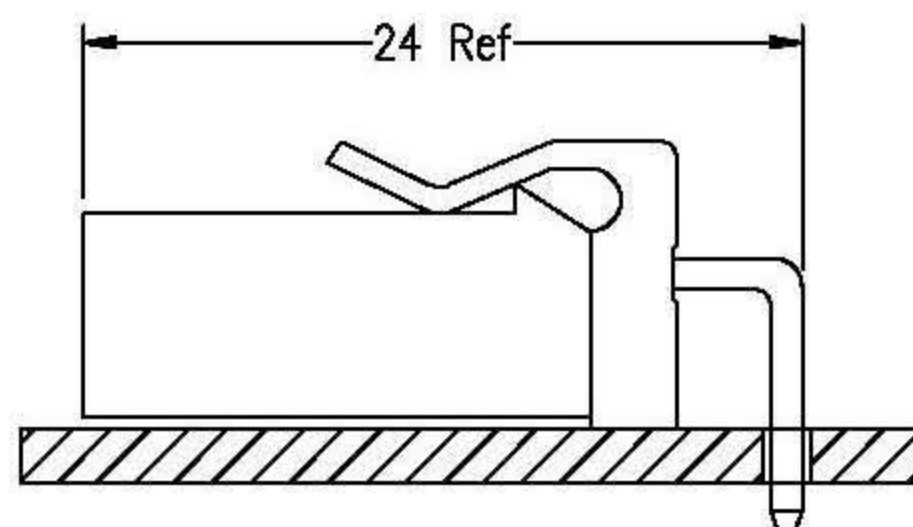

PCB寸法
PCB LAYOUT

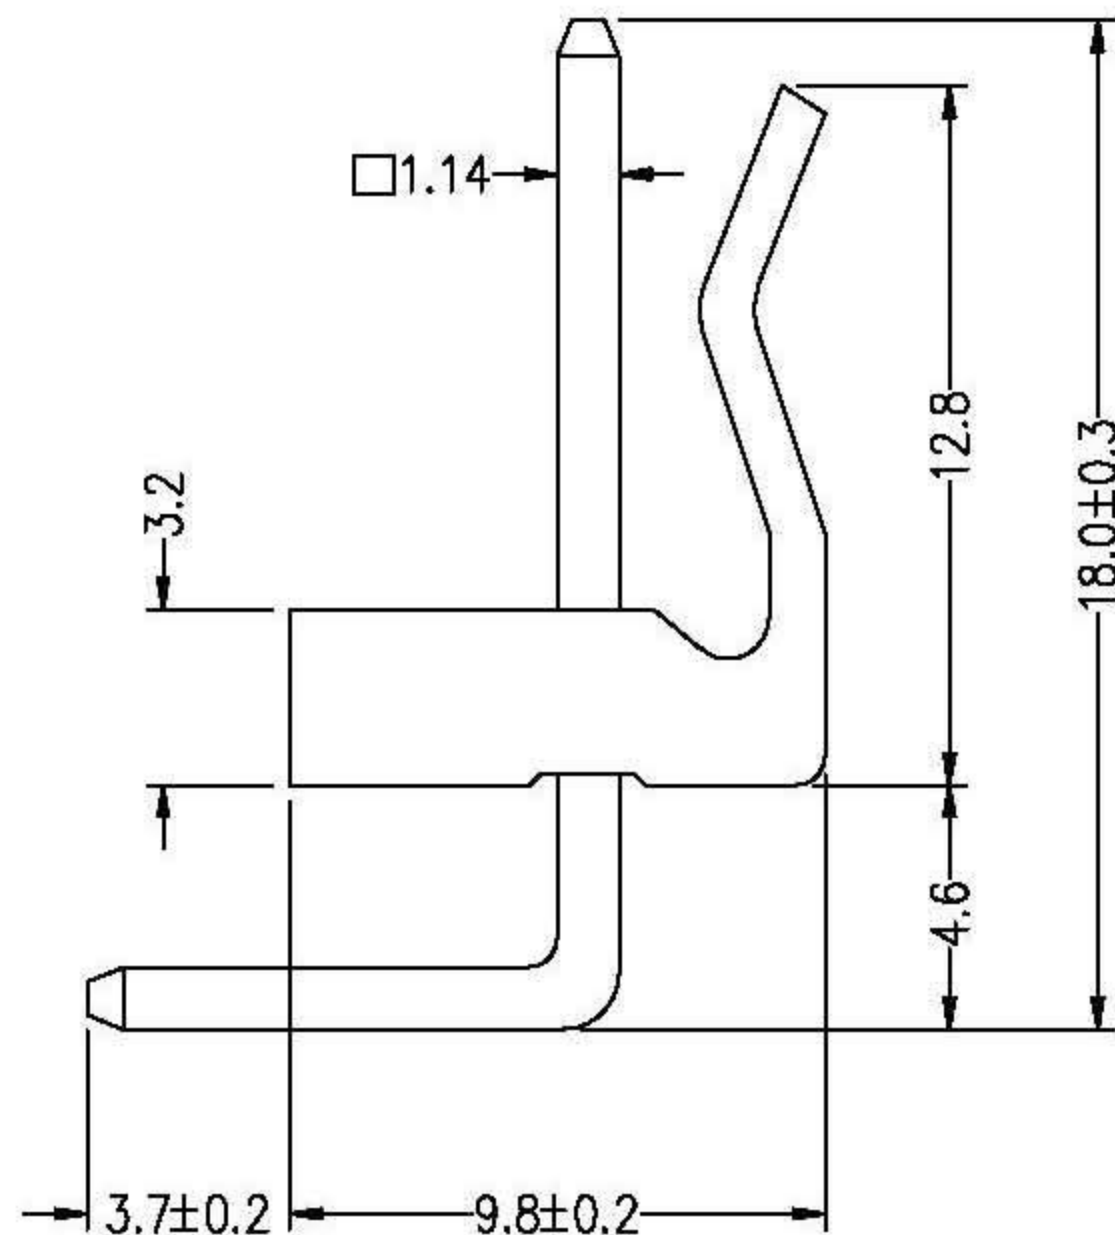

安装尺寸
MOUNTING MEASUREMENT

技术参数 SPECIFICATIONS

- ◆ 间距: 3.96 Pitch: 3.96
- ◆ 线数: 2~16 线数: 2~16
- ◆ 适用线规: AWG#24~#18
Applicable: AWG#24~#18
- ◆ 额定电压: AC,DC,250V (有效值)
Voltage rating: AC,DC,250V (rms)
- ◆ 额定电流: 5.0A,AC,DC
Current rating: 5.0A,AC,DC
- ◆ 耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆ 工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: ≥ 1000 MΩ
Insulation resistance: ≥ 1000 MΩ
- ◆ 接触电阻: ≤ 0.02 Ω
Contact resistance: ≤ 0.02 Ω

接触件 TERMINAL

- ◆ 插针: 黄铜
Pin: Brass

本体: Housing

- ◆ 材质: 尼龙 UL94V-0
Material: Nylon UL94V-0

包装方式 PACKAGE

- ◆ 管装 Pipe Package

CCDX

GENERAL TOLERANCE		SCALE 5=1	DRAWN	DATE	DWG. NO. G:\DWG\Production\2139-nA.DWG	TITLE 成品图	REV. A
XX. ± 0.25	XXX. ± 0.40						
X. ± 0.20	.XXX ± 0.05	UNIT MM	CHECK	DATE	PARTS NO. 3.96 -nAW		SHEET 1/1
.X ± 0.15	.X' ± 2'						
.XX ± 0.08	.X' ± 1'	SIZE A4	APPROVE	DATE			