


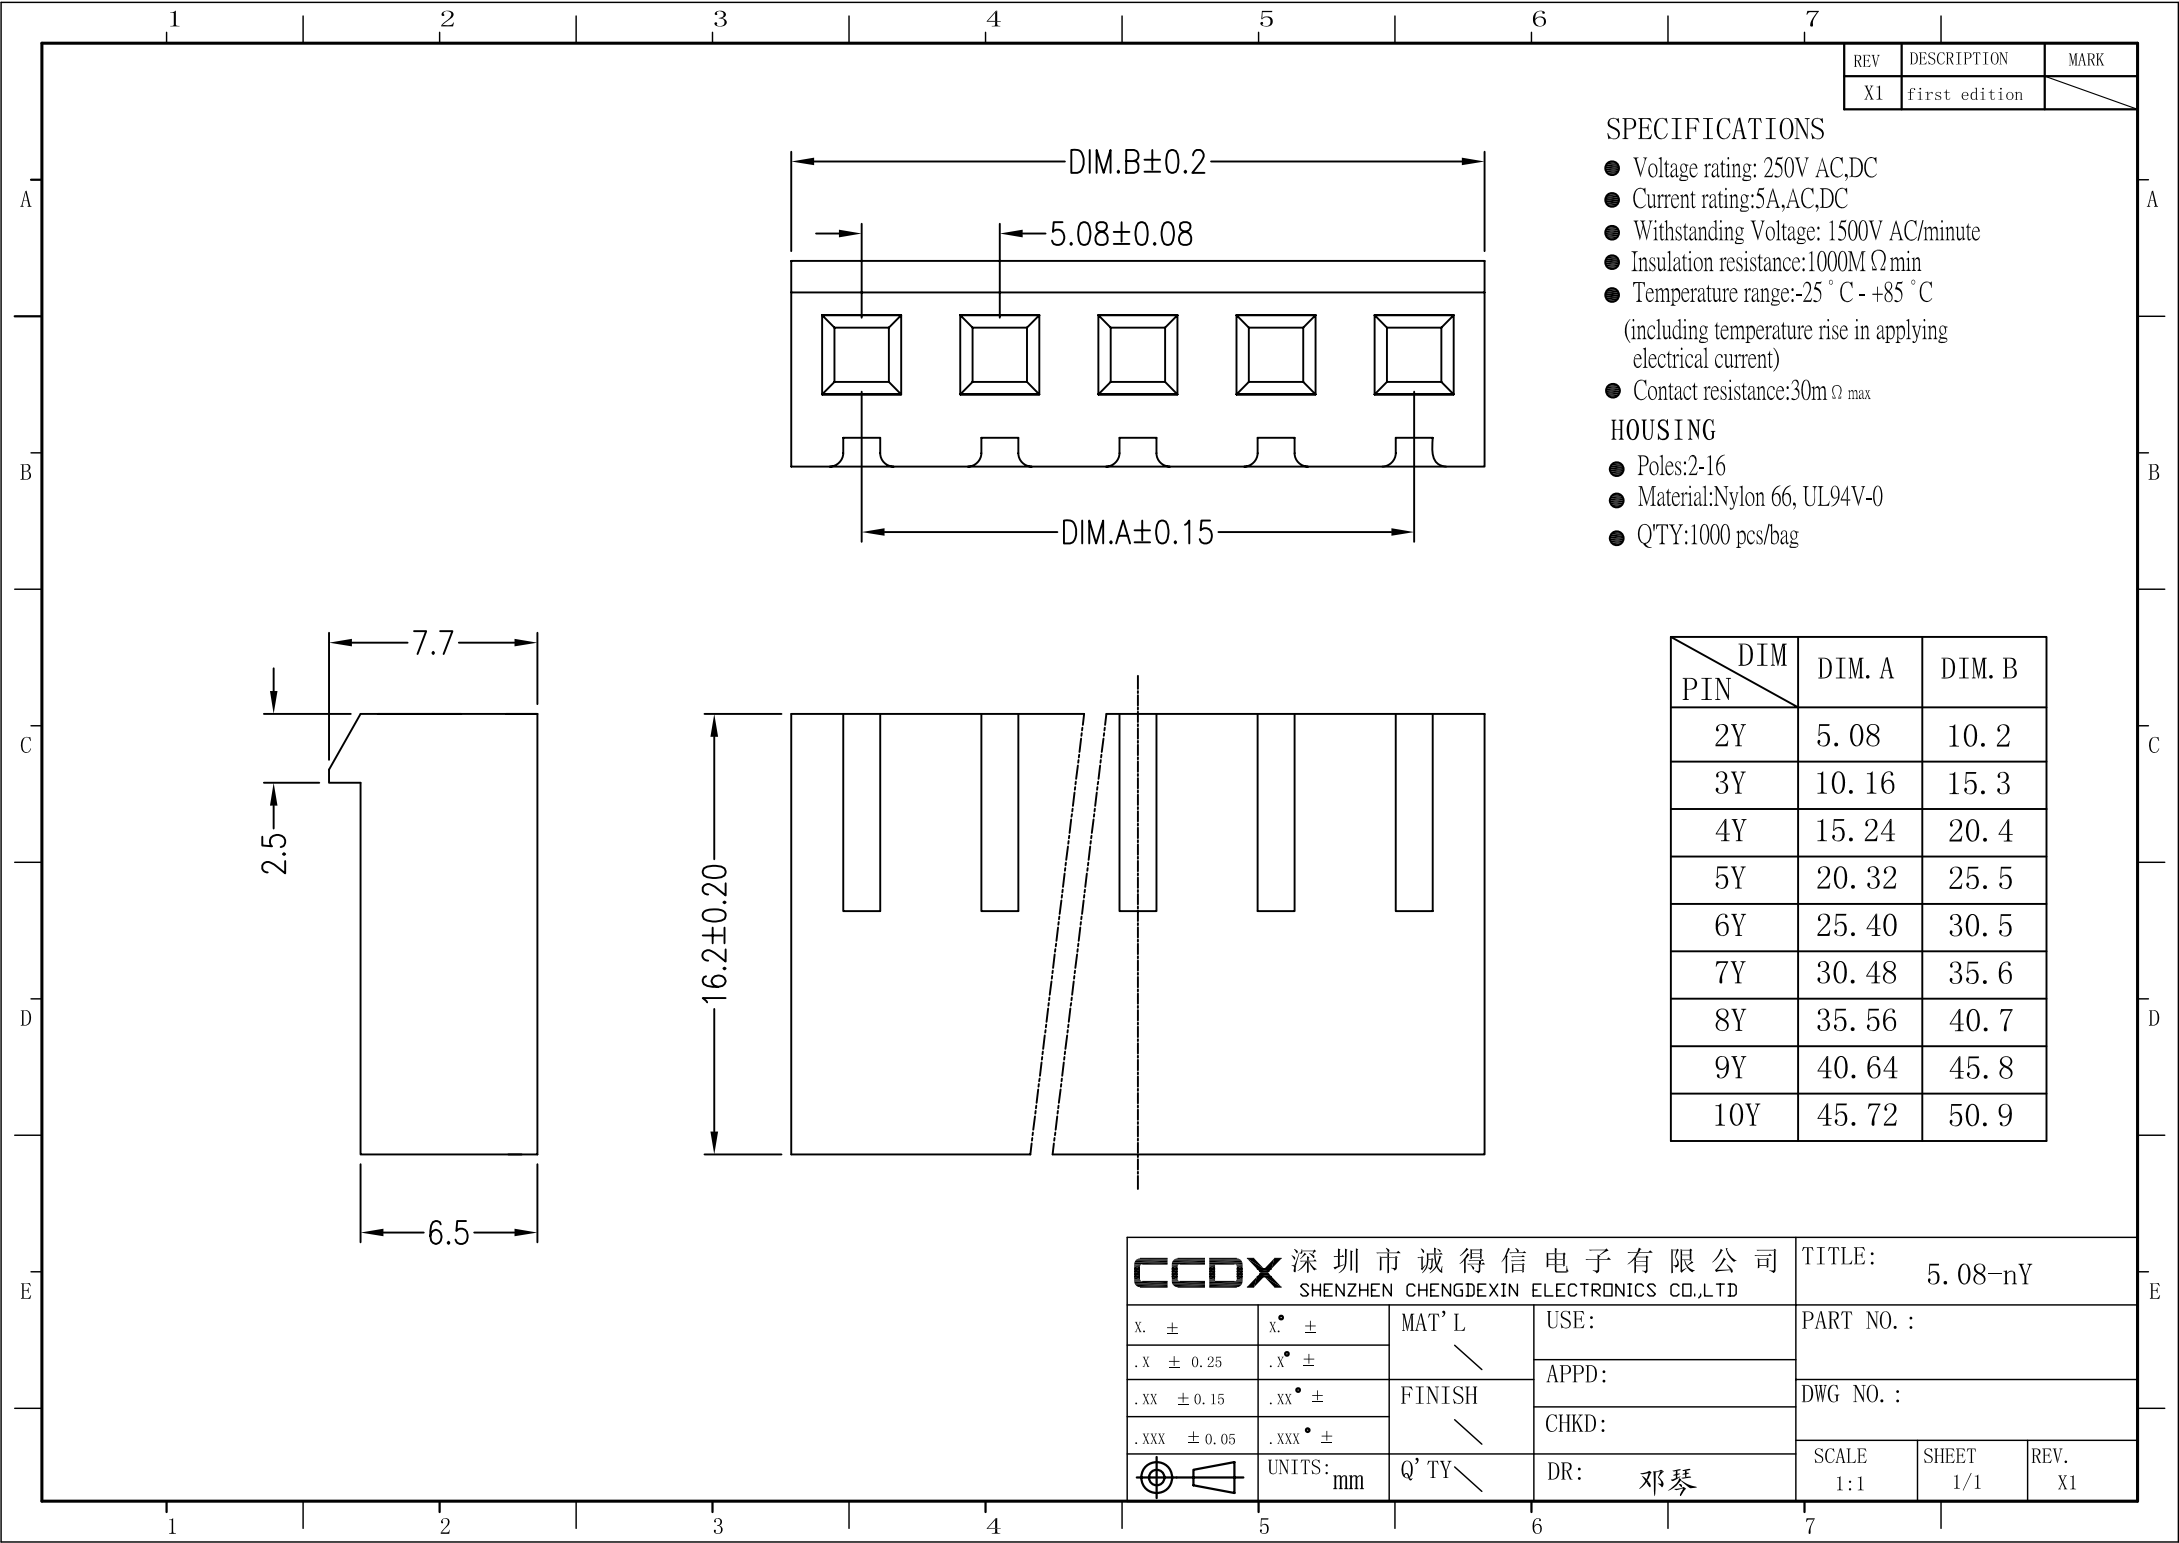

REV	DESCRIPTION	MARK
X1	first edition	

SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25 °C - +85 °C

(including temperature rise in applying electrical current)

- Contact resistance: 30m Ω max

HOUSING

- Poles: 2-16
- Material: Nylon 66, UL94V-0
- QTY: 1000 pcs/bag

DIM PIN	DIM. A	DIM. B
2Y	5.08	10.2
3Y	10.16	15.3
4Y	15.24	20.4
5Y	20.32	25.5
6Y	25.40	30.5
7Y	30.48	35.6
8Y	35.56	40.7
9Y	40.64	45.8
10Y	45.72	50.9


CCDX 深圳市诚得信电子有限公司
SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD

TITLE: 5.08-nY

X. ±	X. ° ±	MAT' L / /
. X ± 0.25	. X ° ±	
. XX ± 0.15	. XX ° ±	FINISH / /
. XXX ± 0.05	. XXX ° ±	

USE:
APPD:
CHKD:

PART NO. :		
DWG NO. :		
SCALE 1:1	SHEET 1/1	REV. X1



UNITS: mm

Q' TY

DR: 邓琴