
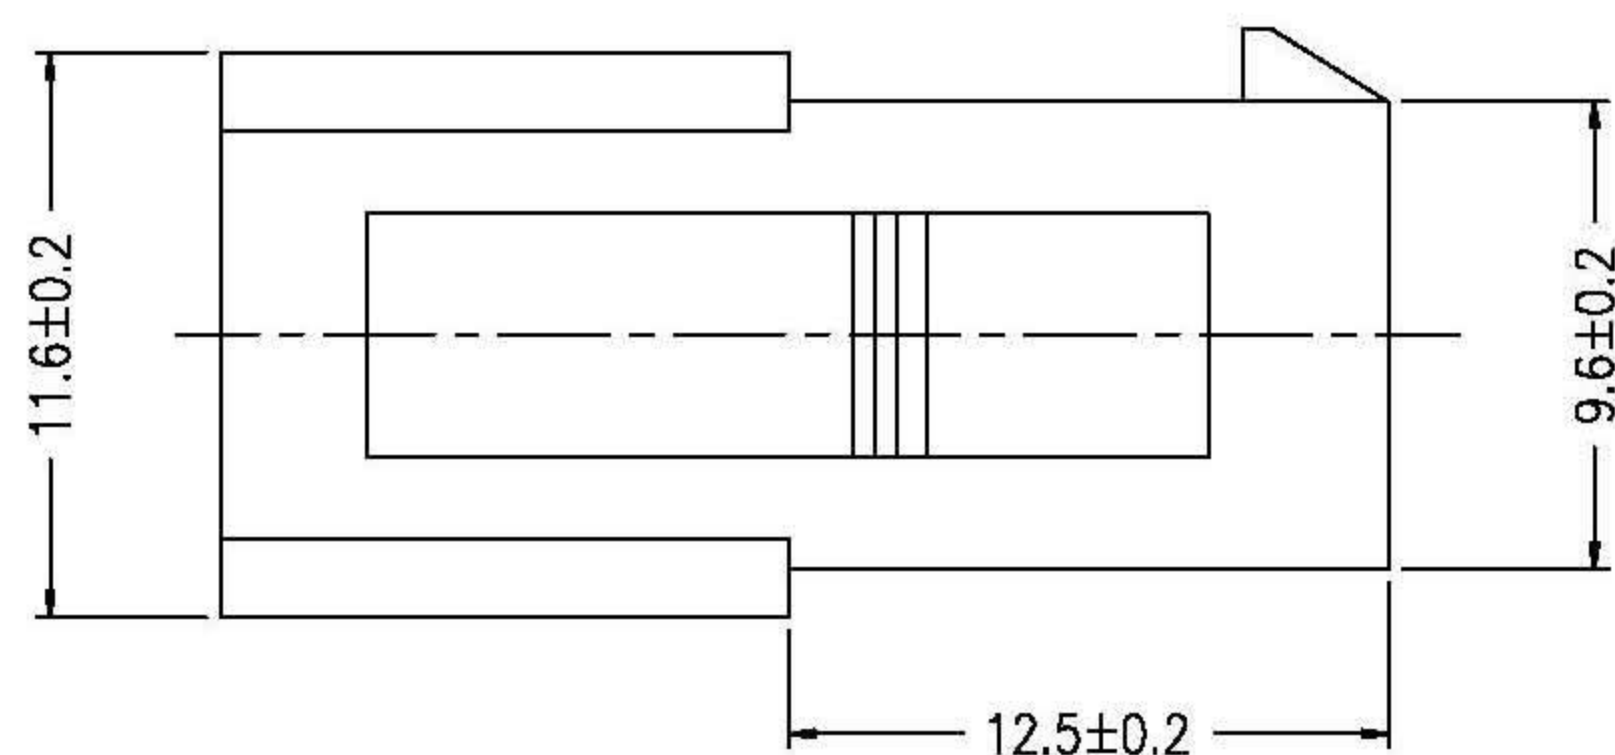
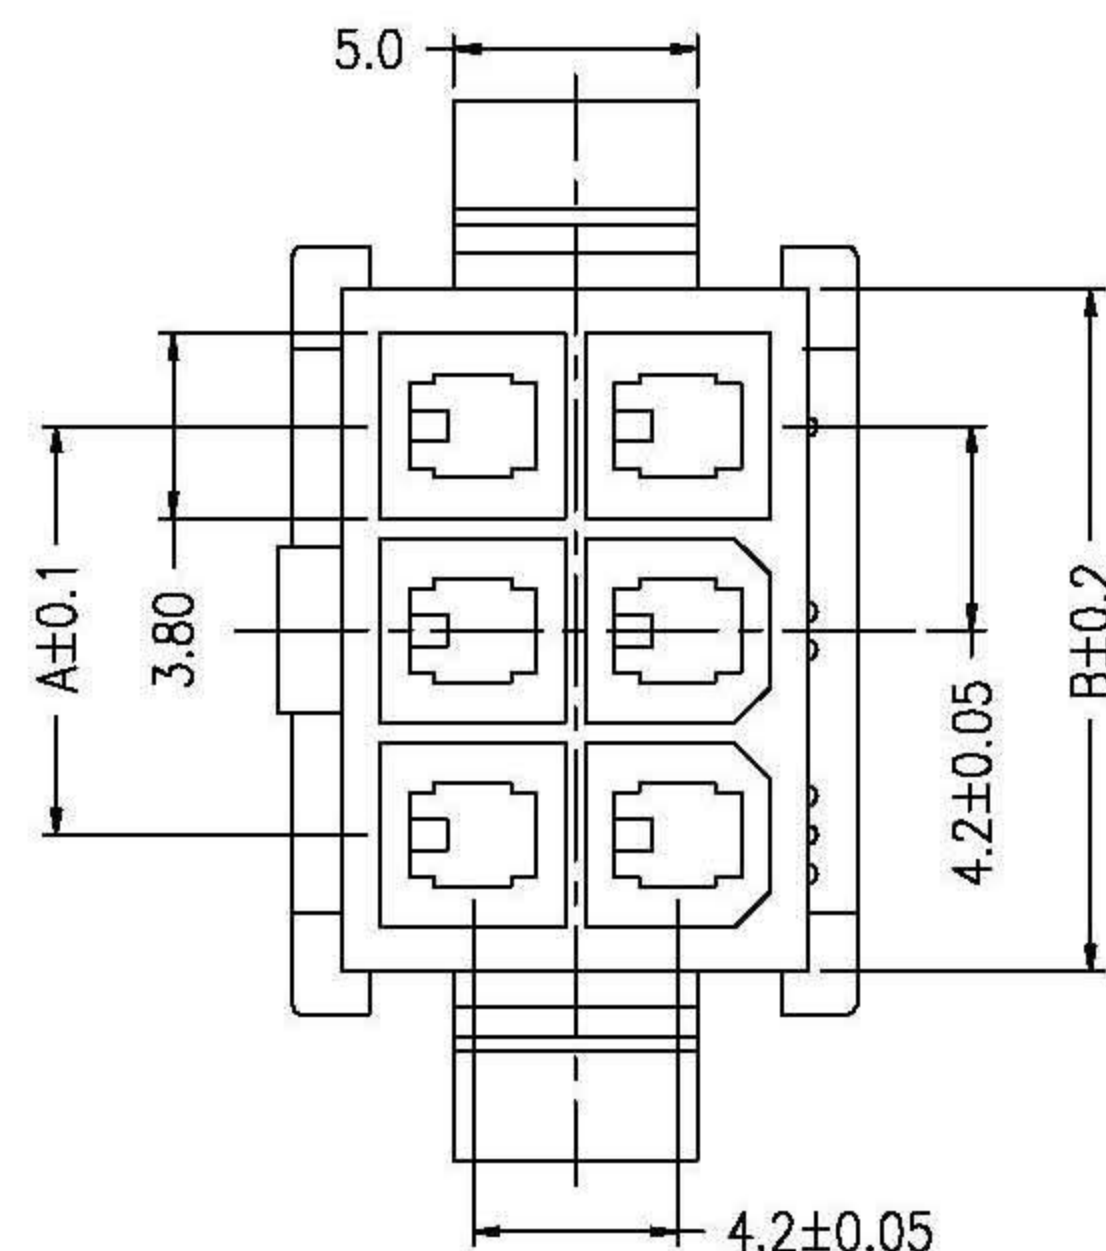


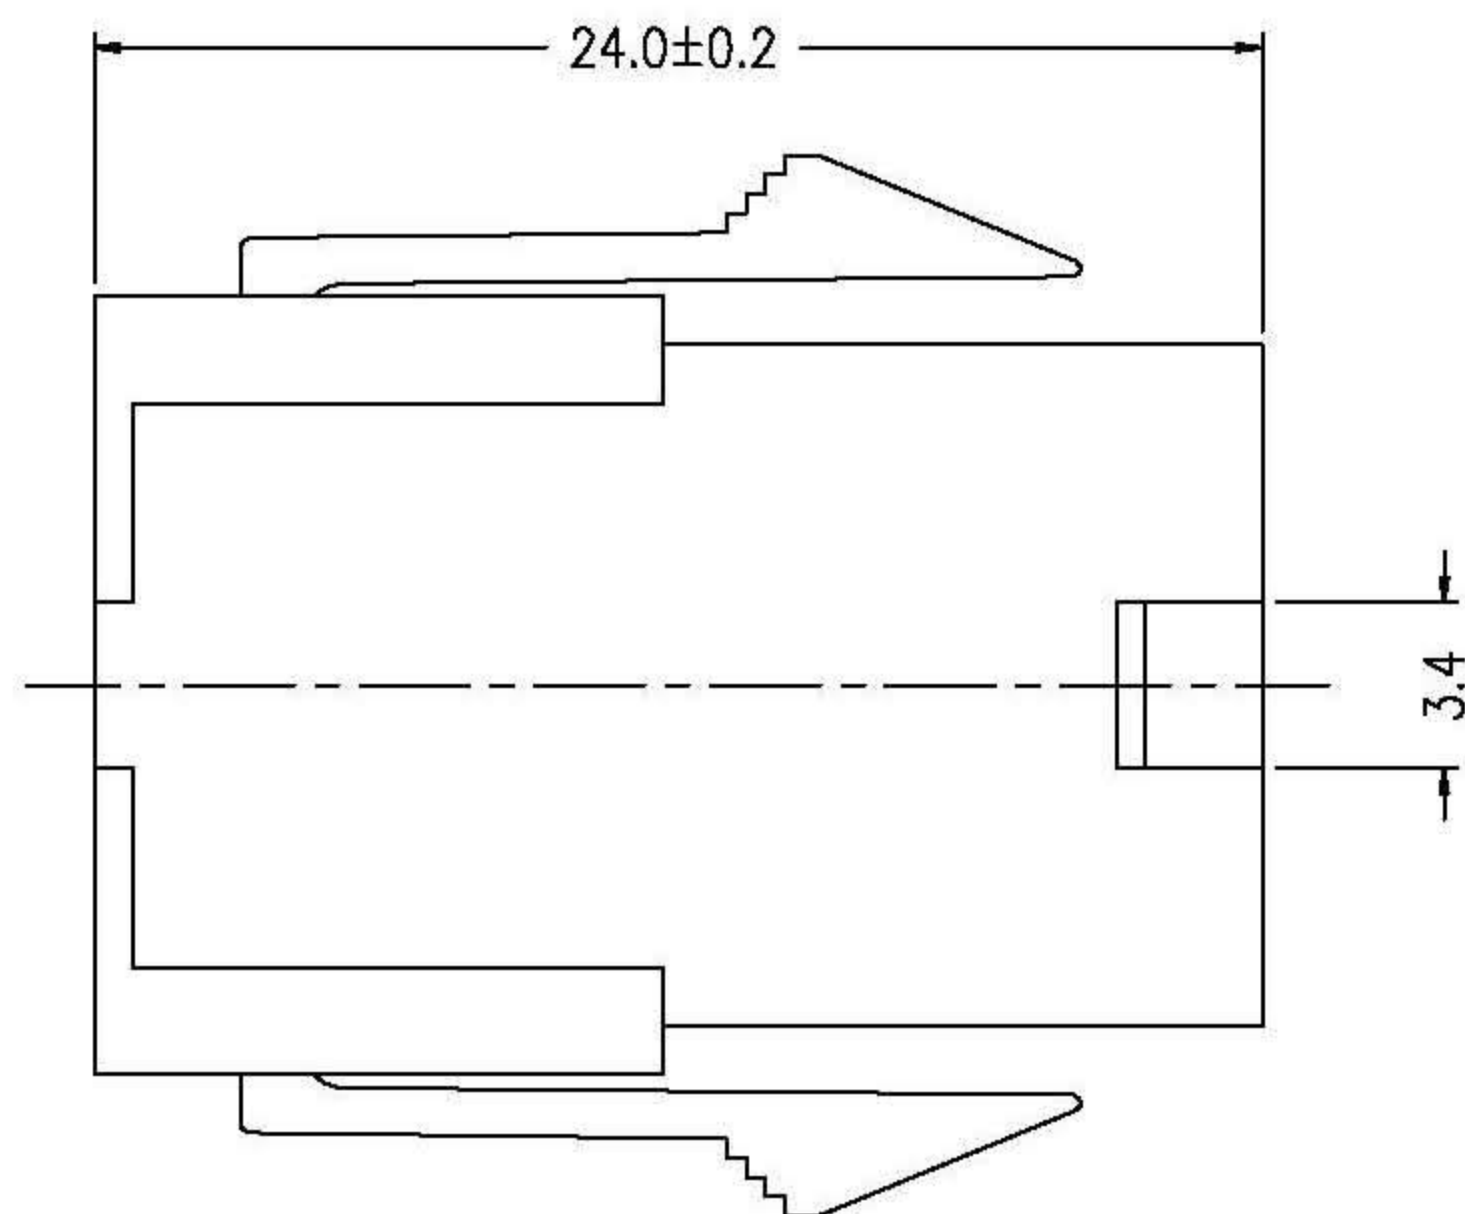

技术参数 SPECIFICATIONS

- ◆ 间距: 4.2 Pitch: 4.2
- ◆ 適用線規: AWG#28~#22
Applicable Wire: AWG#28~#22
- ◆ 额定电压: AC,DC,250V(有效值)
Voltage rating: AC,DC,250V(rms)
- ◆ 额定电流: 5.0A
Current rating: 5.0A
- ◆ 耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆ 工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: ≥1000 MΩ
Insulation resistance: ≥1000MΩ
- ◆ 接触电阻: ≤0.015 Ω
Contact resistance: ≤0.015 Ω

材料 MATERIAL

- ◆ 絕緣座: 尼龍 UL94-0
Housing : Nylon UL94-0
- ◆ 端子: 磷青銅
Terminal : Phosphor bronze

Poles	DIMENSION	
	A	B
2	0	5.6
4	4.2	9.8
6	8.4	14.0
8	12.6	18.2
10	16.8	22.4
12	21.0	26.6
14	25.2	30.5
16	29.4	35.0
18	33.6	39.0
20	37.8	43.4
22	42.0	47.6
24	46.2	51.8

CCDX诚得信

GENERAL TOLERANCE		SCALE 1=1		DRAWN	DATE	DWG. NO. G:\DWG\Production\	TITLE 成品图	REV. A
XX. ± 0.40	XXX. ±	UNIT MM		CHECK	DATE	PARTS NO. 5557-2XnP (Female)		SHEET 1/1
X. ± 0.25	.XXX ±	SIZE A4			APPROVE			DATE
.X ± 0.15	X." ± 2"							
.XX ± 0.10	.X" ± 1"							