

WAFER

Part No: 5557-1XnA 带定位

Material: pin: Brass tin-plated

Base: Nylon66 UL 94V-2



Circuits: 2-6circuits available

Insulation resistance: 1000M Ω min






Withstand Voltage: 1500V AC/minute

Current Rating: 9A AC/DC

Voltage Rating: 600V AC/DC

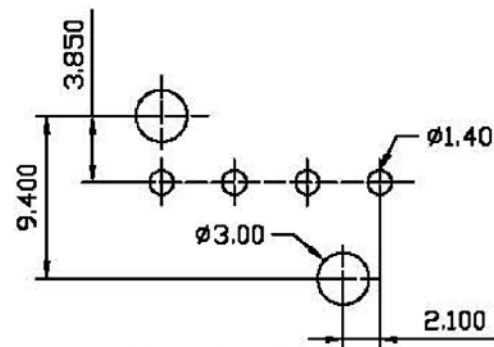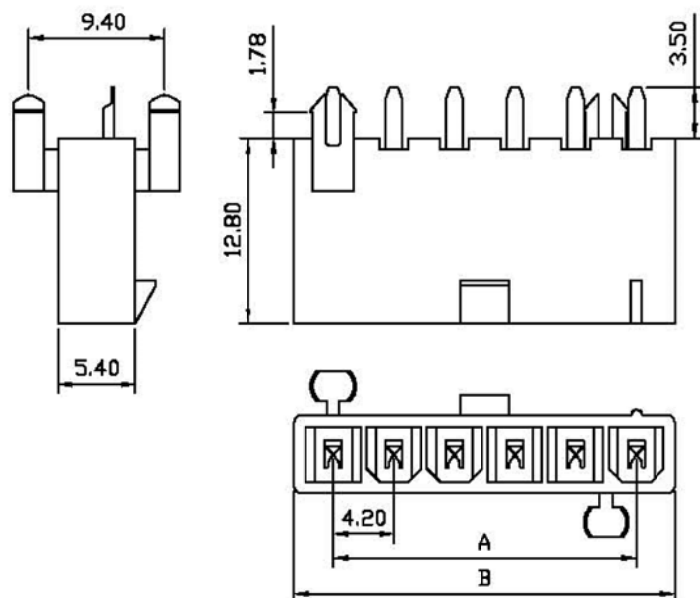

P.C.B. LAYOUT



Dimensions

circuit	A	B
1*2	4.20	9.60
1*3	8.40	13.80
1*4	12.60	18.00
1*5	16.80	22.20
1*6	21.00	26.40

CCDX 深圳市诚得信电子有限公司
SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD

PART NO.:
5557-1XnA 带定位

X. $\pm$ X' $\pm$ MAT'L APPD:
.X $\pm$ 0.1 .X' $\pm$ 0.1*

CUS PART NO.:

.XX $\pm$ 0.05 .XX' $\pm$ 0.05* FINISH CHKD:
.XXX $\pm$.XXX' $\pm$

DATE VERSION
VI.0

UNITS: mm Q'TY DR: 邓琴

SCALE 1:1 SHEET 1/1 REV. X1