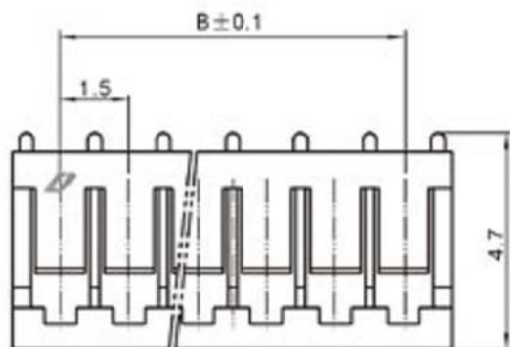
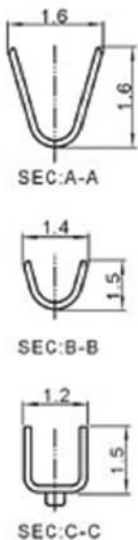
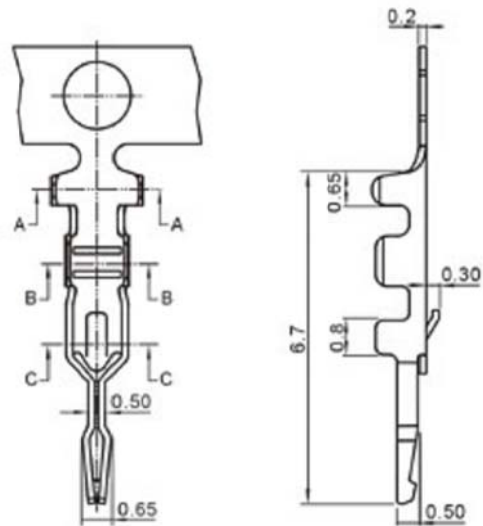


技术参数:

间距: 1.5

线数: 2~15

适用线规: AWG #28~#32

额定电压: 100V DC/AC (有效值)

额定电流: 1.0A

耐压值: 500V AC (有效值)

工作温度: -25℃~+85℃

绝缘电阻: ≥500MΩ

接触电阻: ≤0.02Ω

适用印制板厚度: 0.8mm~1.6mm

材料:

外壳: 尼龙66 UL94V-0

端子: 磷青铜

REV	DESCRIPTION	MARK
X1	first edition	

线数 Poles	编号 Part No	尺寸 Dimensions (mm)	
		A	B
2	SZN-2P	3.60	1.50
3	SZN-3P	5.10	3.00
4	SZN-4P	6.60	4.50
5	SZN-5P	8.10	6.00
6	SZN-6P	9.60	7.50
7	SZN-7P	11.10	9.00
8	SZN-8P	12.60	10.50
9	SZN-9P	14.10	12.00
10	SZN-10P	15.60	13.50
11	SZN-11P	17.10	15.00
12	SZN-12P	18.60	16.50
13	SZN-13P	20.10	18.00
14	SZN-14P	21.60	19.50
15	SZN-15P	23.10	21.00

CCDX 深圳市诚得信电子有限公司
SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD

PART NO.: 1.5T-3-nY/TER

X. ±	X.° ±	MAT' L /	APPD:	CUS PART NO. :		
. X ± 0.1	. X° ± 0.1°					
. XX ± 0.05	. XX° ±0.05°	FINISH /	CHKD:	DATE	VERSION VI. 0	
. XXX ±	. XXX° ±					
	UNITS: mm	Q' TY /	DR: 邓琴	SCALE 1:1	SHEET 1/1	REV. X1