

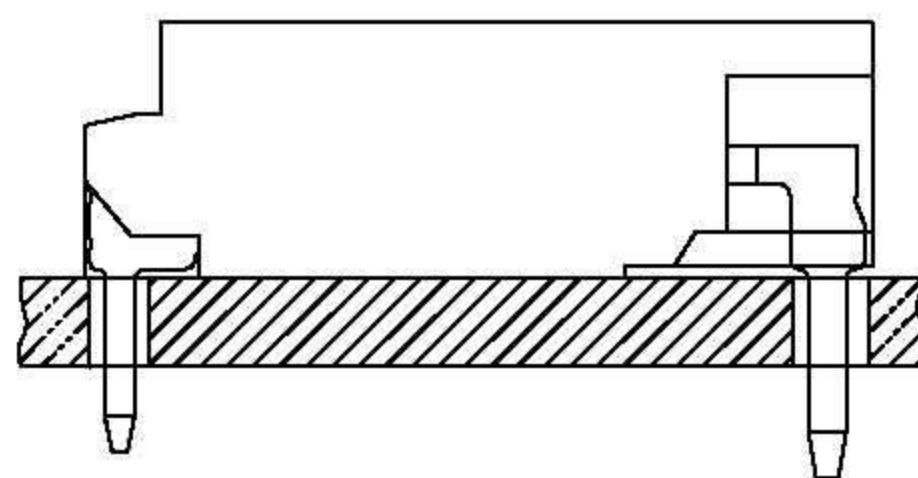
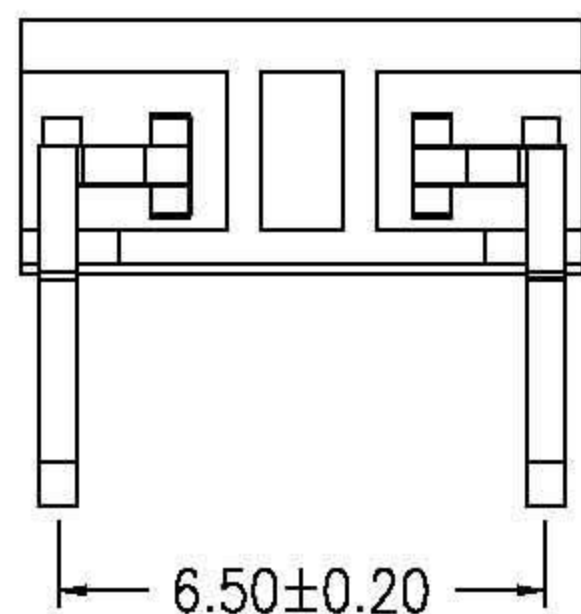
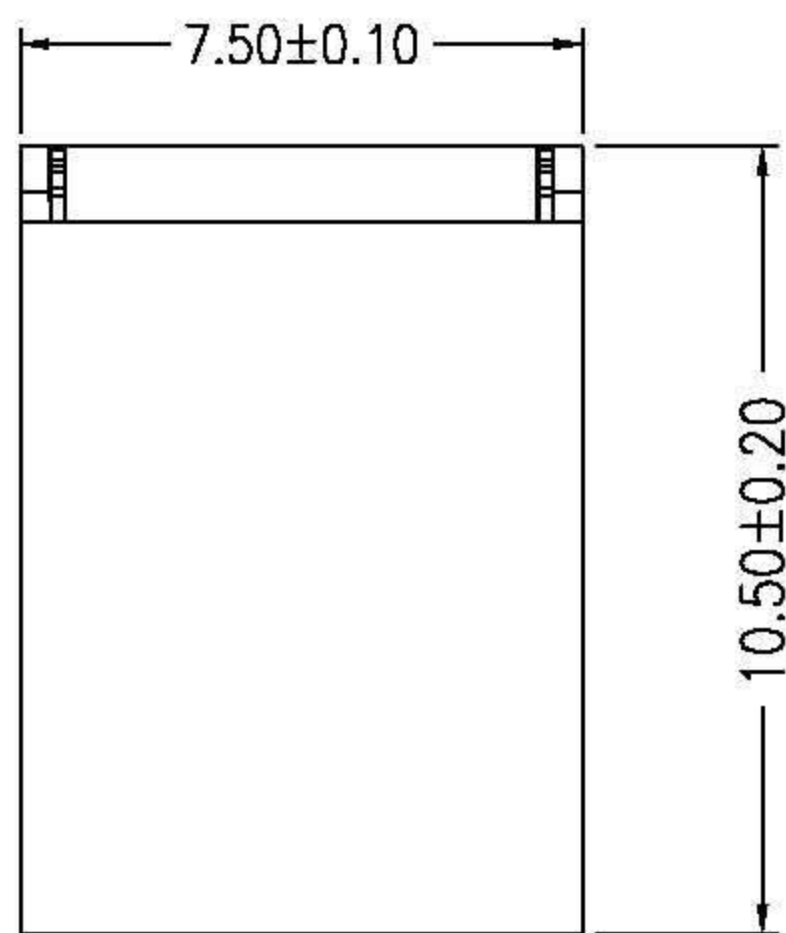
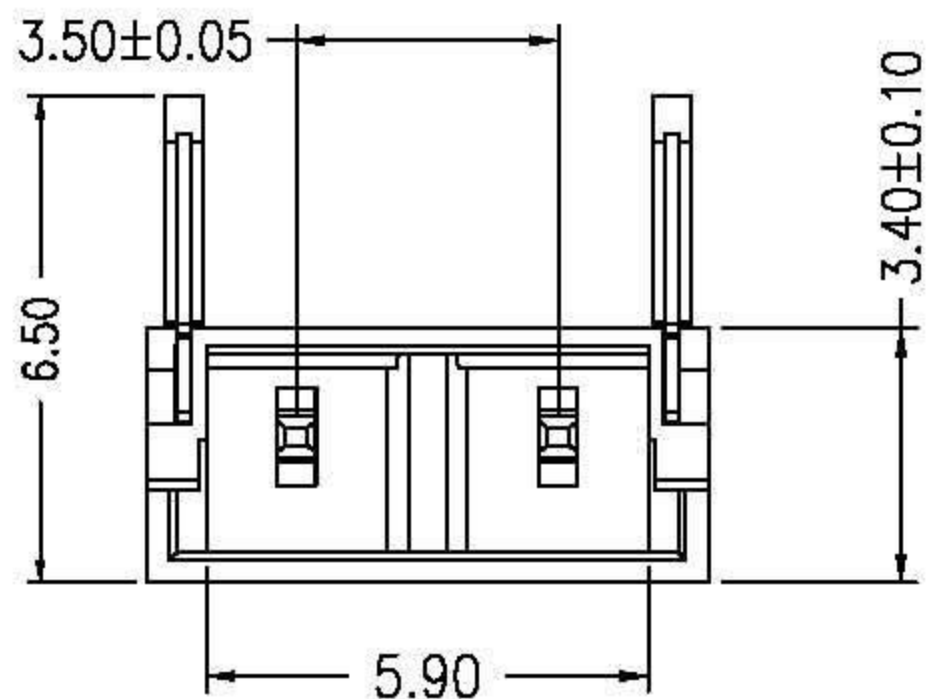
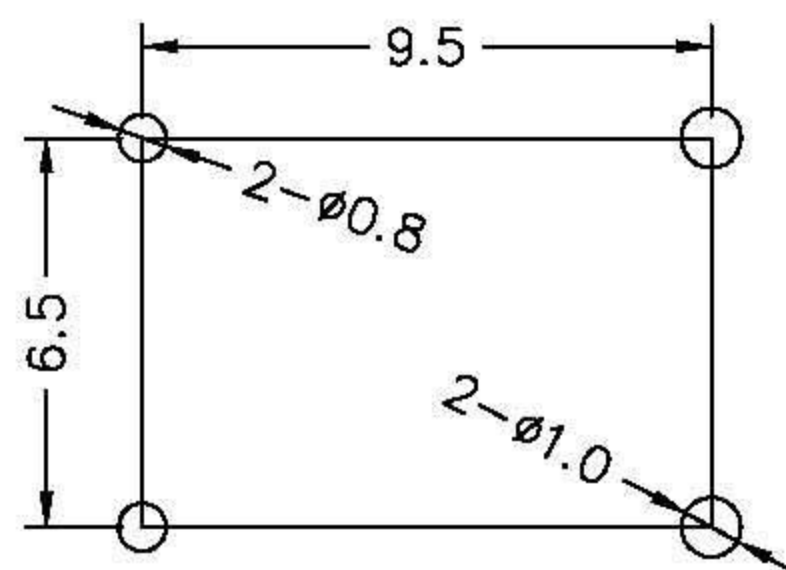


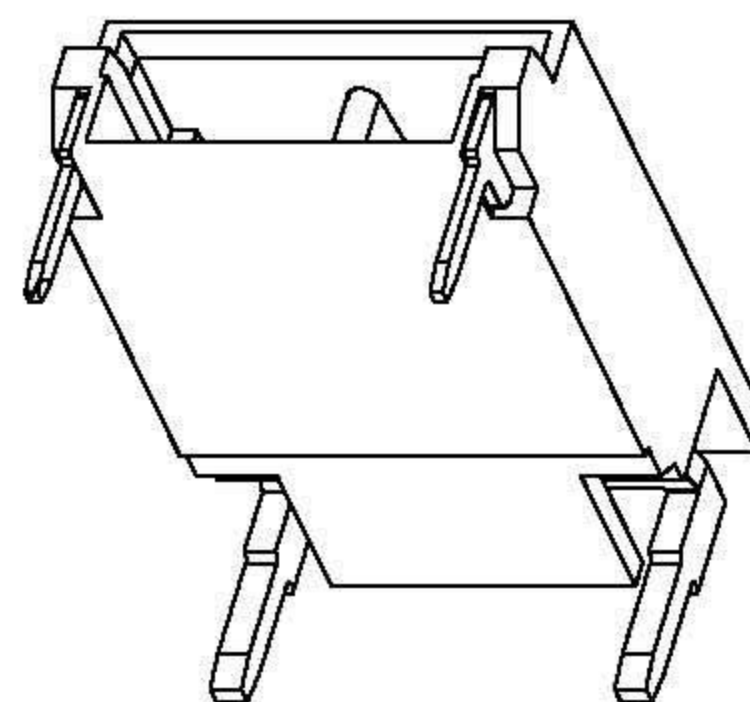

ASSEMBLY LAYOUT

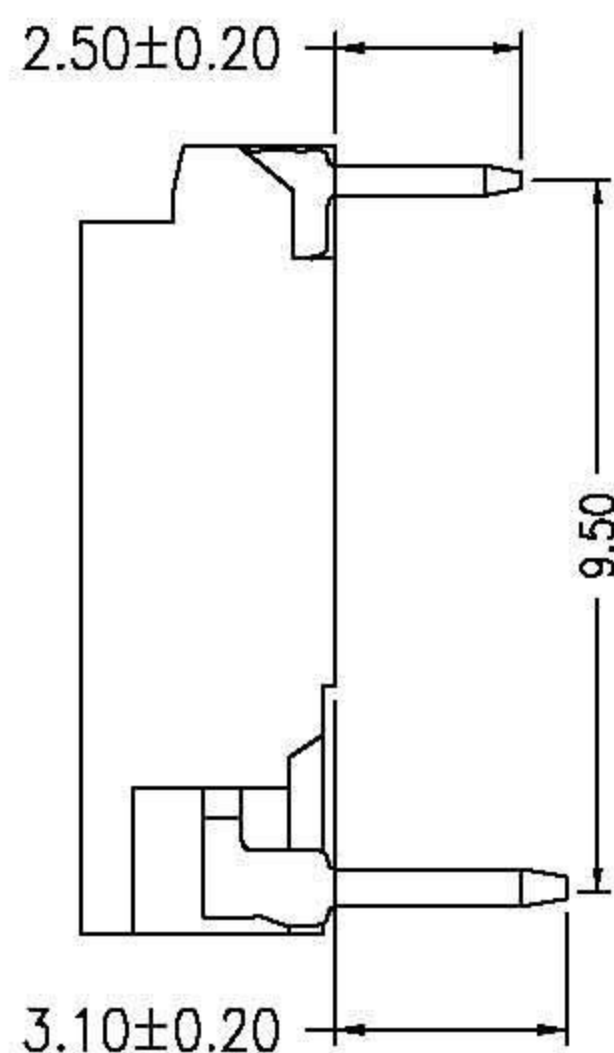

PCB LAYOUT

技术参数 SPECIFICATIONS

- ◆ 间距: 3.5 PITCH: 3.5
- ◆ 适用线规: AWG#28~#24
Applicable wire: AWG#28~#24
- ◆ 额定电压: AC,DC,1400V(100HZ有效值)
Voltage rating: AC,DC,1400V(100HZ)
- ◆ 额定电流: 1.0A,AC,DC
Current rating: 1.0A,AC,DC
- ◆ 耐压值: 3800V AC/minute
Withstand voltage: 3800V AC/minute
- ◆ 工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: ≥1000 ohM
Insulation resistance: ≥1000ohM
- ◆ 接触电阻: ≤0.02 oh
Contact resistance: ≤0.02 oh
- ◆ 适用印制板厚度: 0.8mm
Applicable PC board thickness: 0.8mm
- ◆ Material
外壳: Nylon 66 UL94V-0
Housing: Nylon 66 UL94V-0
- ◆ 针座: Pin header:
1.基座: Nylon 9T, UL94V-0
Wafer: Nylon 9T, UL94V-0
2.插针: 黄铜 Pin: Brass
- ◆ 端子: 磷青铜 Terminal: Phosphor bronze

◆ Part No: BHD 3.5 - A W

间距: (Pitch) _____
针座: (A) _____
卧式: (W) _____

CCDX
诚得信电子

GENERAL TOLERANCE	
XX. ± 0.40	XXX. ±
X. ± 0.25	.XXX ±
.X ± 0.15	X' ± 2'
.XX ± 0.10	.X' ± 1'

SCALE	1=1
UNIT	MM
SIZE	

DRAWN	DATE
CHECK	DATE
APPROVE	DATE

DWG. NO.	G:\DWG\Production\BHD.DWG
PARTS NO.	BHD3.5-AW

TITLE	成品图
-------	-----

REV.	A
SHEET	1/1