
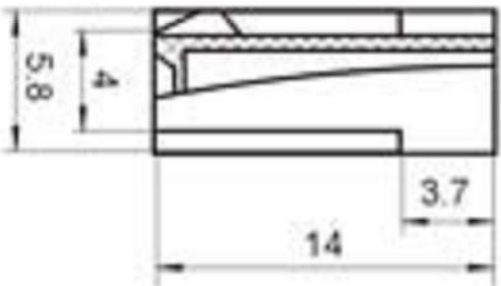
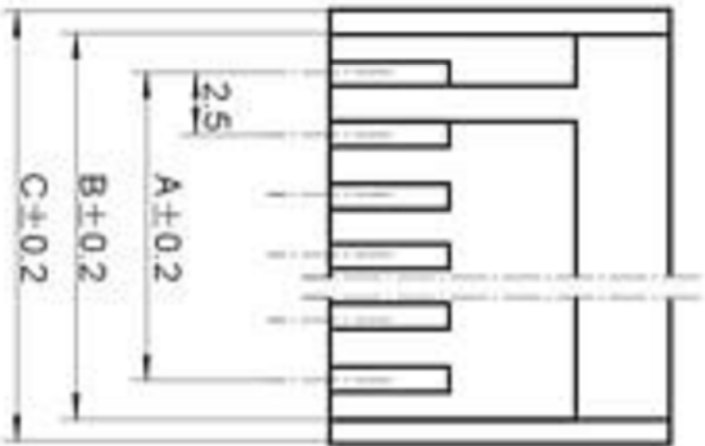

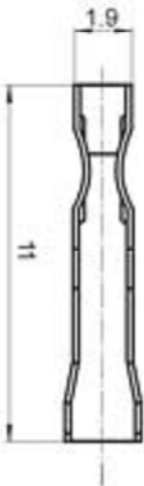


REV	DESCRIPTION	MARK
X1	first edition	

技术参数:
间距: 2.5
线数: 2~12
适用线规: AWG#28~#22
额定电压: 250V DC/AC (有效值)
额定电流: 3.0A
耐压值: 1000V AC (有效值)
工作温度: -25℃~+85℃
绝缘电阻: ≥1000MΩ
接触电阻: ≤0.02Ω
适用印制板厚度: 1.6mm

材料:
插头: 尼龙66 UL94V-0
端子: 磷青铜

线数 Poles	编号 Part No	尺寸Dimensions(mm)		
		A	B	C
2	EI-2Y	2.5	5.6	7.3
3	EI-3Y	5.0	8.1	9.8
4	EI-4Y	7.5	10.6	12.3
5	EI-5Y	10.0	13.1	14.8
6	EI-6Y	12.5	15.6	17.3
7	EI-7Y	15.0	18.1	19.8
8	EI-8Y	17.5	20.6	22.3
9	EI-9Y	20.0	23.1	24.8
10	EI-10Y	22.5	25.6	27.3
11	EI-11Y	25.0	28.1	29.8
12	EI-12Y	27.5	30.6	32.3

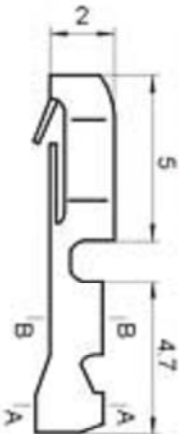

CCCOX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO.: EI/JVC-nY/TER		
X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:		
.X ± 0.1	.X ± 0.1°	✓				
.XX ± 0.05	.XX ± 0.05°	FINISH	CHKD:	DATE		VERSION
.XXX ±	.XXX ±	✓				VL. 0
	UNITS: mm	Q'TY	DR: 邓琴	SCALE 1:1	SHEET 1/1	REV. X1