




REV	DESCRIPTION	MARK
X1	first edition	

Poles	A	B	C
2 Y	2.5	7.5	3.5
3 Y	5.0	10.0	3.5
4 Y	7.5	12.5	6.0
5 Y	10.0	15.0	8.5
6 Y	12.5	17.5	11.0
7 Y	15.0	20.0	13.5
8 Y	17.5	22.5	16.0
9 Y	20.0	25.0	18.5
10 Y	22.5	27.5	21.0
11 Y	25.0	30.0	23.5
12 Y	27.5	32.5	26.0
13 Y	30.0	35.0	28.5
14 Y	32.5	37.5	31.0
15 Y	35.0	40.0	33.5
16 Y	37.5	42.5	36.0

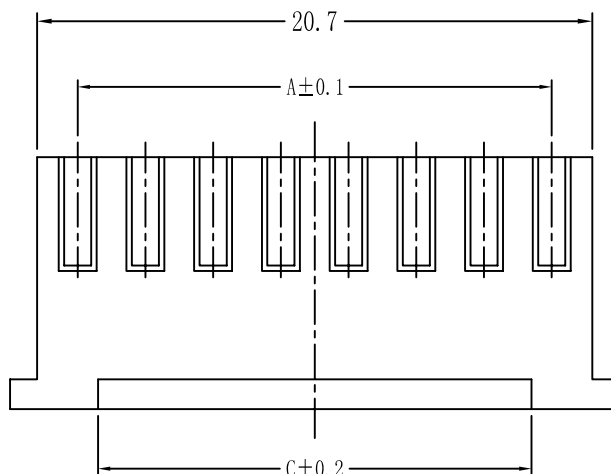

SEC A-A

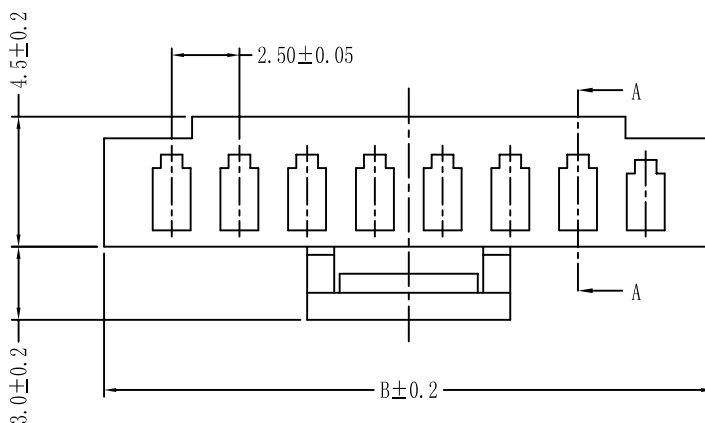

SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 3A, AC,DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩmin
- Temperature range: -25°C - +85°C
(including temperature rise in applying electrical current)
- Contact resistance: 30mΩ max

WAFER

- Poles: 2-16
- Material: Nylon 66, UL94V-0
- Q' TY: 1000 pcs/bag

CCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: XHS-nY		
X. ±	x.° ±	MAT' L	USE:	PART NO. :		
.X ± 0.2	.x° ±			APPD:		
.XX ± 0.1	.xx° ±	FINISH	CHKD:	DWG NO. :		
.XXX ±	.xxx° ±			SCALE 1:1		
UNITS: mm		Q' TY	DR: 邓琴	SHEET 1/1	REV. X1	