



REV	DESCRIPTION	MARK
X1	first edition	

技术要求:


1. 端子镀层表面要求平整光洁无毛刺, 垫伤, 目视切面没有纹点, 无明显划痕, 斑点花纹等;
2. 规格: 额定电压: 100VAC, DC;
额定电流: 1.0A AC, DC;
耐压值: 800VAC/Min;
工作温度: -25℃~+85℃;
接触电阻: 30mΩ/Max; 绝缘电阻: 500MΩ/Min;
3. 材质: 塑胶: PA66 UL94V-0 白色;
端子: 磷青铜表面镀锡.

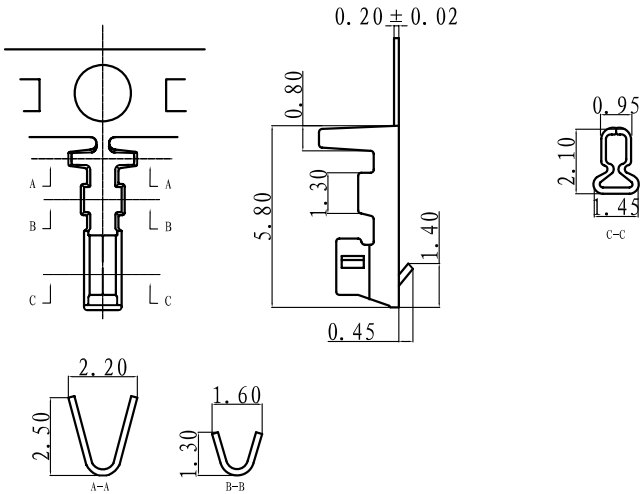

TERMINAL

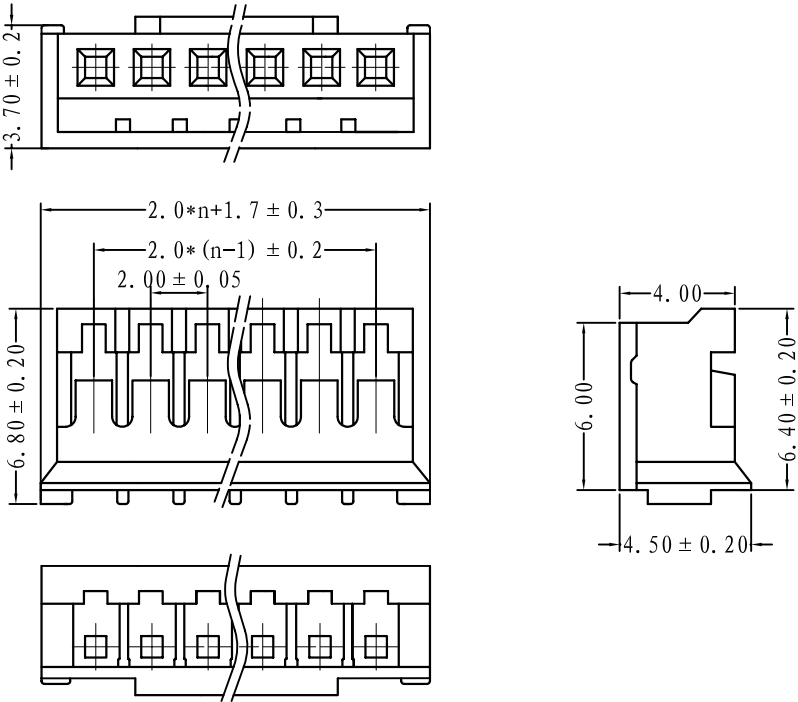

HOUSING

CCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO.: PH-nY/TER(CS 1124)		
X. ±	X.° ±	MAT'L /	APPD:	CUS PART NO.:		
.X ± 0.1	.X° ± 0.1°					
.XX ± 0.05	.XX° ± 0.05°	FINISH /	CHKD:	DATE	VERSION	
.XXX ±	.XXX° ±				VI. 0	
	UNITS: mm	Q' TY /	DR: 邓琴	SCALE 1: 1	SHEET 1/1	REV. X1