


REV	DESCRIPTION	MARK
X1	first edition	


技术参数:
间距: 1.5
线数: 2~15
适用线规: AWG #28~#32
额定电压: 100V DC/AC (有效值)
额定电流: 1.0A
耐压值: 500V AC (有效值)
工作温度: -25℃~+85℃
绝缘电阻: $\geq 500M\Omega$
接触电阻: $\leq 0.02\Omega$
适用印制板厚度: 0.8mm~1.6mm

材料:
外壳: 尼龙66 UL94V-0
端子: 磷青铜

线数 Poles	编号 Part No	尺寸 Dimensions (mm)	
		A	B
2	JC15-2P	3.60	1.50
3	JC15-3P	5.10	3.00
4	JC15-4P	6.60	4.50
5	JC15-5P	8.10	6.00
6	JC15-6P	9.60	7.50
7	JC15-7P	11.10	9.00
8	JC15-8P	12.60	10.50
9	JC15-9P	14.10	12.00
10	JC15-10P	15.60	13.50
11	JC15-11P	17.10	15.00
12	JC15-12P	18.60	16.50
13	JC15-13P	20.10	18.00
14	JC15-14P	21.60	19.50
15	JC15-15P	23.10	21.00

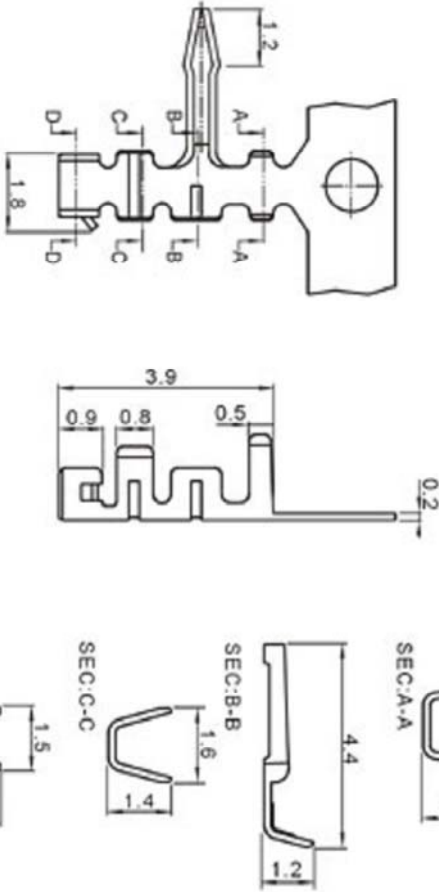


SEC:D-D








SEC:C-C



SEC:B-B



SEC:A-A

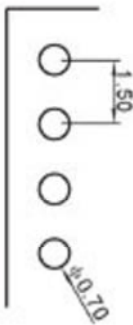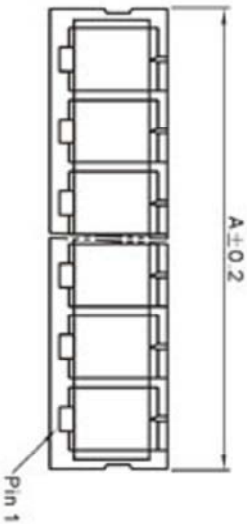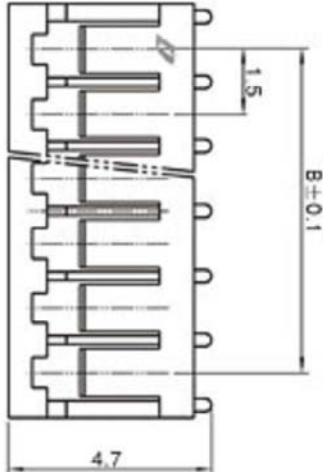

PCB LAYOUT

CCCOX 深圳市诚得信电子有限公司
SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD

PART NO.: 1.5T-2-nY/TER

X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:	VERSION
.X ± 0.1	.X ± 0.1°	✓			VI.0
.XX ± 0.05	.XX ± 0.05°	FINISH	CHKD:	DATE	
.XXX ±	.XXX ±	Q'TY	DR: 邓琴	SCALE 1:1	SHEET 1/1
UNITS: mm				REV. XI	