


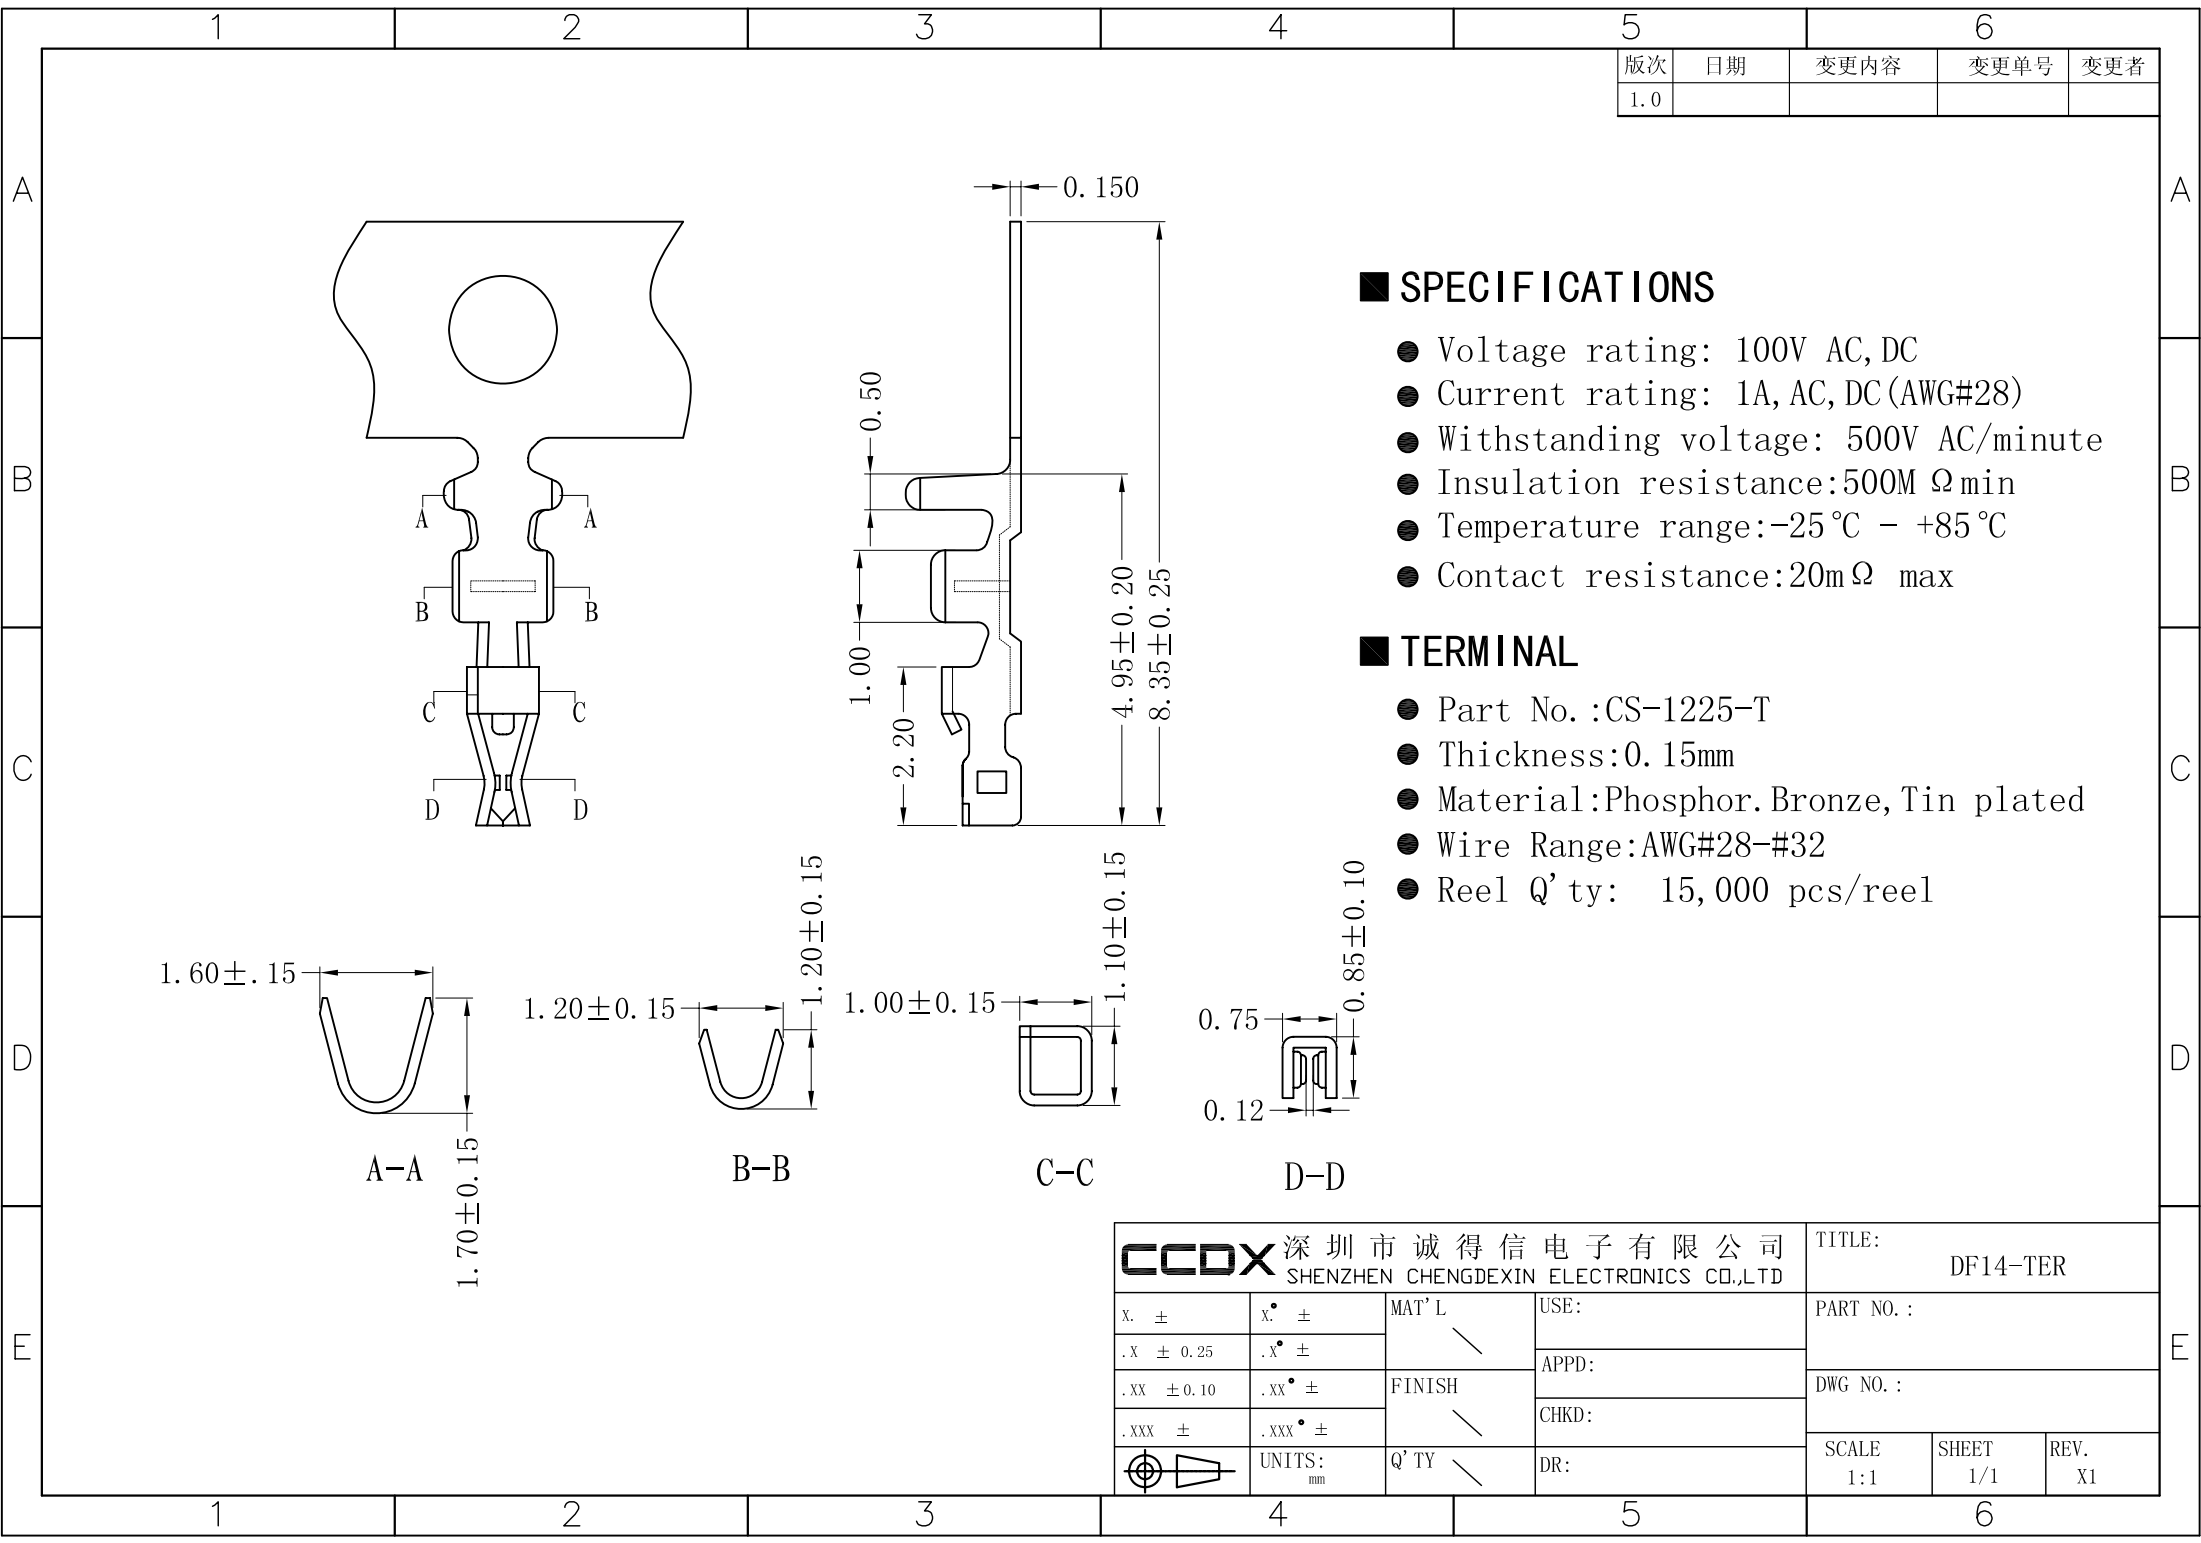

版次	日期	变更内容	变更单号	变更者
1.0				

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 1A, AC, DC (AWG#28)
- Withstanding voltage: 500V AC/minute
- Insulation resistance: 500M Ω min
- Temperature range: -25℃ - +85℃
- Contact resistance: 20m Ω max

■ TERMINAL

- Part No. : CS-1225-T
- Thickness: 0.15mm
- Material: Phosphor. Bronze, Tin plated
- Wire Range: AWG#28-#32
- Reel Q' ty: 15,000 pcs/reel

CCOXX 深圳市诚得信电子有限公司
SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD

TITLE: DF14-TER

X. ±	X. ±	MAT' L	USE:	PART NO. :		
.X ± 0.25	.X ±		APPD:			
.XX ± 0.10	.XX ±	FINISH	CHKD:	DWG NO. :		
.XXX ±	.XXX ±		DR:			
	UNITS: mm	Q' TY		SCALE 1:1	SHEET 1/1	REV. X1