
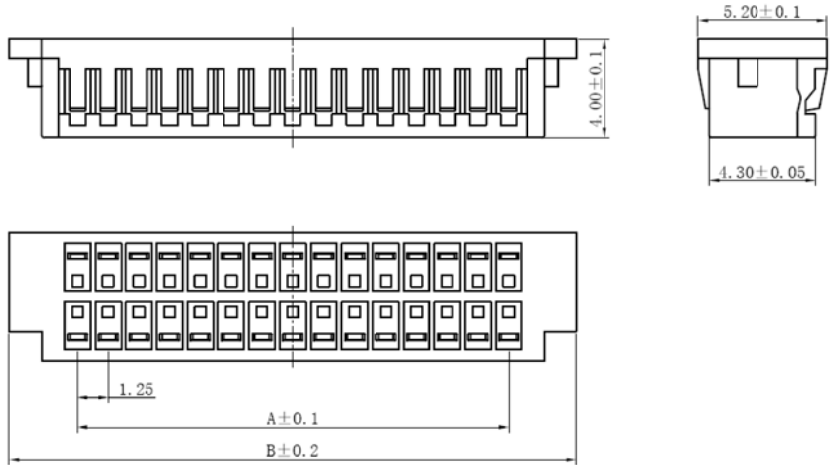


材質：
NYLON PA66 UL94V-0
PHOSPHOR BRONZE TIN-PLATING

規格：
額定電流：1A
額定電壓：125V AC/DC
絕緣阻阡：100M Ohm/Min
耐電壓： 250V AC/MIN
溫度範圍：-25° ~ +85°

REV	DESCRIPTION	MARK
X1	first edition	

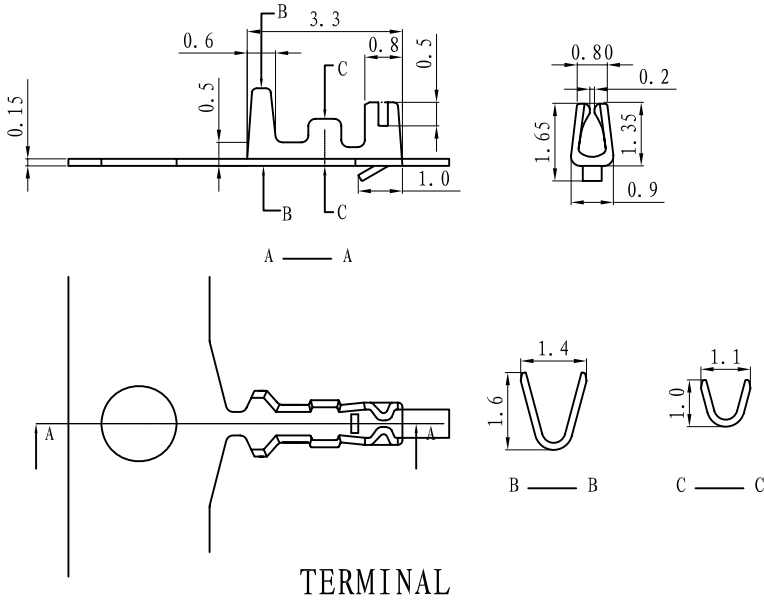

孔位 poles	A	B
10	5.0	12.0
20	11.25	18.25
30	17.5	24.5
40	23.75	30.75

CCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO.: DF13-2*nY/TER		
X. ±	X.° ±	MAT'L /	APPD:	CUS PART NO.:		
.X ± 0.1	.X° ± 0.1°					
.XX ± 0.05	.XX° ± 0.05°	FINISH /	CHKD:	DATE		VERSION VI. 0
.XXX ±	.XXX° ±					
	UNITS: mm	Q' TY /	DR:	SCALE 1: 1	SHEET 1/1	REV. X1