

REV	DESCRIPTION	MARK
X1	first edition	






技术参数 SPECIFICATIONS

- ◆ 额定电压: AC,DC,50V
Voltage rating: AC,DC,50V
- ◆ 额定电流: 1.0A,AC,DC
Current rating: 1.0A,AC,DC
- ◆ 耐压值: 500V AC/minute
Withstand voltage: 500V AC/minute
- ◆ 工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: $\geq 100\text{ M}\Omega$
Insulation resistance: $\geq 100\text{ M}\Omega$
- ◆ 接触电阻: $\leq 0.02\ \Omega$
Contact resistance: $\leq 0.02\ \Omega$
- ◆ 本体材质: 尼龙66 UL94V-0
Wafer Material : Nylon66 UL94V-0

包装方式 PACKAGE

- ◆ 编带包装 Tape and Reel Package
- ◆ 管装 Pipe Package
- ◆ 袋装 Bag Package

极数	A 尺寸	B 尺寸	C 尺寸
10	9.00	11.20	13.00
15	14.00	16.20	18.00
20	19.00	21.20	23.00
25	24.00	26.20	28.00

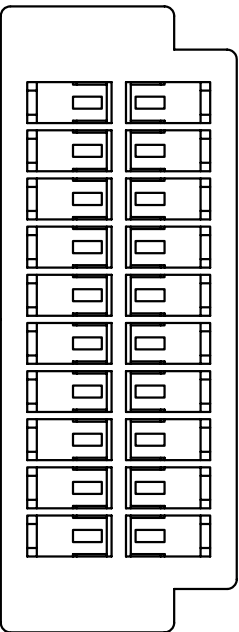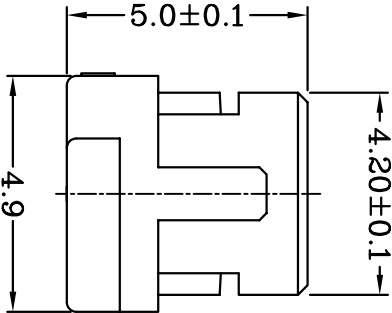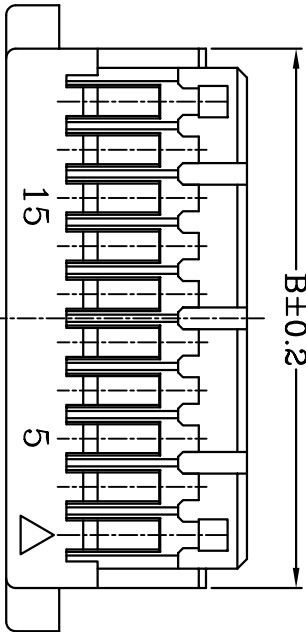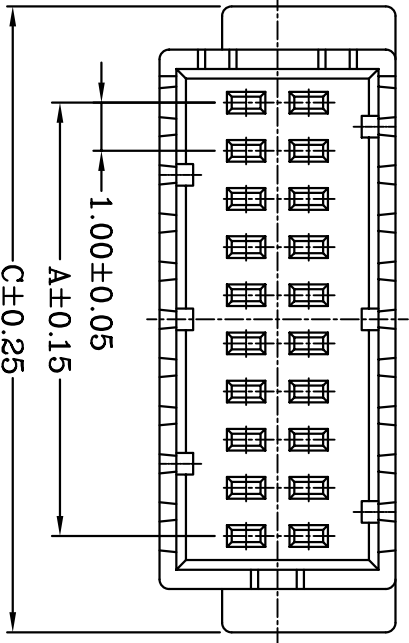

CCCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: 1.0T-2-2XnY			
X ±	X' ±	MAT'L		USE:		PART NO.:	
X ± 0.25	X' ±	FINISH		APPD:		DWG NO.:	
XX ± 0.15	XX' ±	CHKD:		DR:		SCALE	
XXX ± 0.05	XXX' ±	UNIT		邓琴		SHEET	
		mm				1:1	
						REV.	
						X1	