
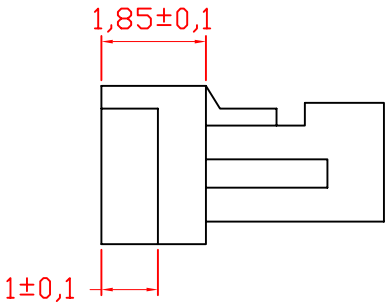
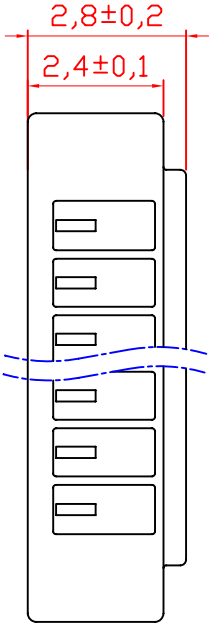
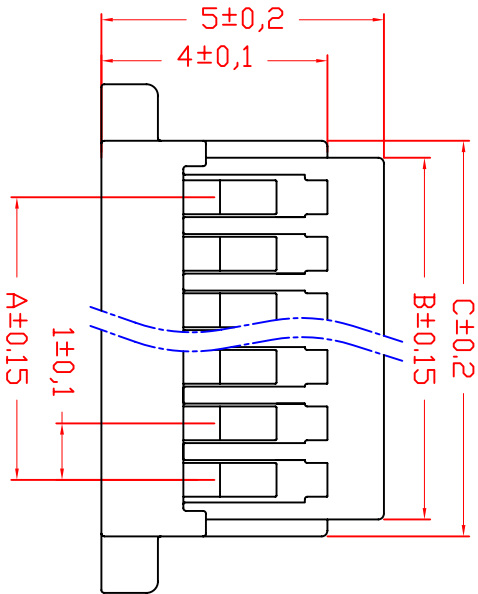


REV	DESCRIPTION	MARK
X1	first edition	

技术要求:

- 零件表面要求平整光洁无毛刺,无明显盲孔,划痕斑点花纹,油污缩水,毛边变形或孔位偏斜等;
 - 规格:额定电压:100VDC/AC;额定电流:0.5A;
耐压值:500VAC;
工作温度:-20°C~+85°C;
接触电阻:30mΩ/Max;绝缘电阻:500MΩ/Min;
适用电线范围:AWG32#~28#;
 - 材质:塑胶:PA66 UL94V-0 (White);
端子:磷青铜 镀锡.
- PEC管理规定:
1、禁止使用含有SS-00259的限制的物质。
2、对应的SGS或ITS出具的ICP-AES数据,
不可测定物质的成分表,在一年有效期内。

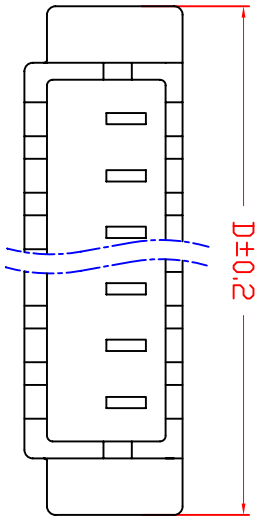

POLES	尺寸: (mm)			
	A	B	C	D
2	1.0	2.35	3.0	5.0
3	2.0	3.35	4.0	6.0
4	3.0	4.35	5.0	7.0
5	4.0	5.35	6.0	8.0
6	5.0	6.35	7.0	9.0
7	6.0	7.35	8.0	10.0
8	7.0	8.35	9.0	11.0
9	8.0	9.35	10.0	12.0
10	9.0	10.35	11.0	13.0
11	10.0	11.35	12.0	14.0
12	11.0	12.35	13.0	15.0
13	12.0	13.35	14.0	16.0
14	13.0	14.35	15.0	17.0
15	14.0	15.35	16.0	18.0
16	15.0	16.35	17.0	19.0
17	16.0	17.35	18.0	20.0
18	17.0	18.35	19.0	21.0
19	18.0	19.35	20.0	22.0
20	19.0	20.35	21.0	23.0

CCD 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO: 1.0T-1XnY			
X. ±	X' ±	MAT'L	APPD:	DWG NO.:			
.X ± 0.10	X' ± 0.1°	✓					
.XX ± 0.05	.XX' ± 0.05°	FINISH	CHKD:	DATE		VERSION	
.XXX ±	.XXX' ±	✓				V1.0	
UNIT: mm	UNIT: °	DR: 邓琴		SCALE 1/1	SHEET 1/1	REV. X1	