




REV	DESCRIPTION	MARK
X1	First edition	

SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1.0A AC/DC (AWG#28)
- Withstanding Voltage:500V AC/minute
- Insulation resistance:100MΩ min
- Temperature range:-25℃ - +85℃
- Contact resistance:20mΩ

WAFER

- Part No: CS-1253-T
- Thickness:0.12mm
- Material:Phosphor Bronze tin-Plated.
- Wire Range:AWG#28-#32
- Reel Q' ty:20,000 pcs/reel

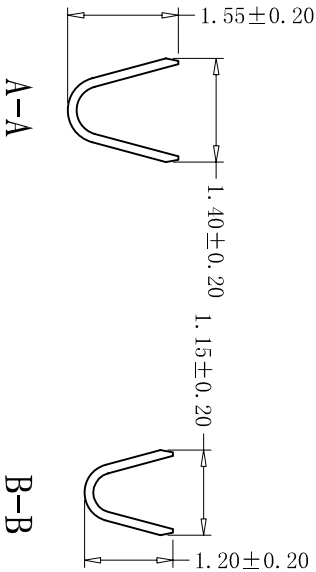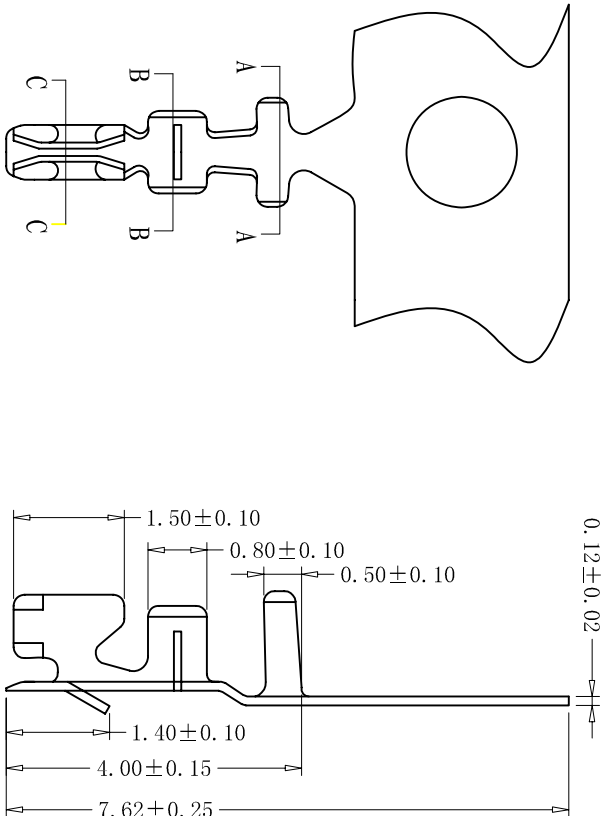

CCCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: 1.0T-1-TER		
X. ±		X. ±		PART NO.:		
.X ± 0.25		.X ±		USE:		
.XX ± 0.15		.XX ±		APPD:		
.XXX ±		.XXX ±		CHKD:		
UNITS: mm		Q' TY		DR: 邓琴		
SCALE 1:1		SHEET 1/1		REV. X1		