





REV	DESCRIPTION	MARK
X1	first edition	

技术参数 SPECIFICATIONS

- 间距: 4.2 Pitch: 4.2
- 適用線規: AWG#28~#22
Applicable Wire: AWG#28~#22
- 额定电压: AC,DC,250V(有效值)
Voltage rating: AC,DC,250V(rms)
- 额定电流: 5.0A
Current rating: 5.0A
- 耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- 工作温度: -25 C~+85 C
Working Temperature: -25 C~+85 C
- 绝缘电阻: >1000 MΩ
Insulation resistance: >1000MΩ
- 接触电阻: < 0.015 Ω
Contact resistance: < 0.015 Ω

材料 MATERIAL

- 绝缘座: 尼龍66 UL94-0
Housing: Nylon66 UL94-0
- 插针: 黃銅
Pin: Brass

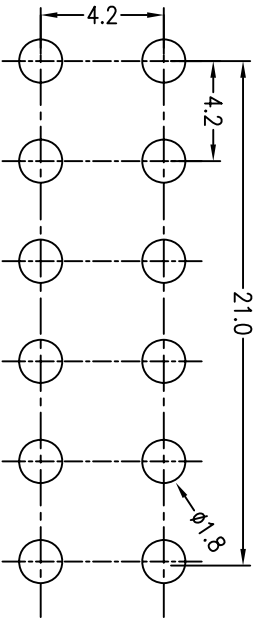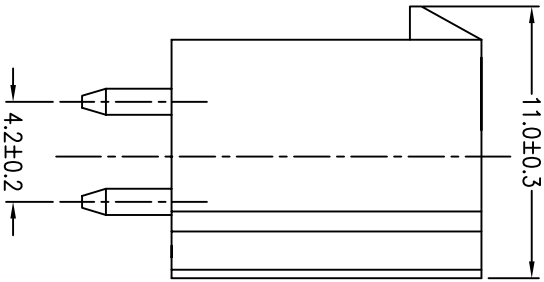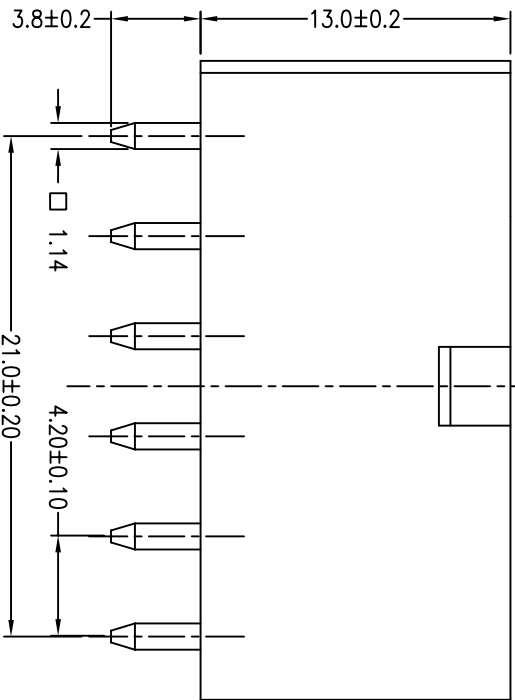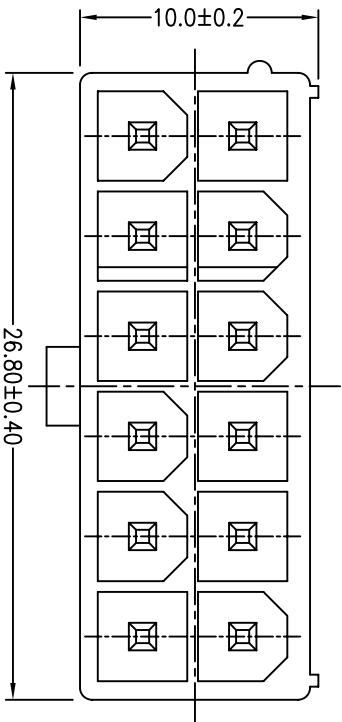

P.C.B LAYOUT

CCCDX 深 圳 市 诚 得 信 电 子 有 限 公 司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: 5557-2*6A		
X. ±	X. ±	MAT'L	USE:	PART NO.:		
.X ± 0.25	.X ±		APPD:			
.XX ± 0.10	.XX ±	FINISH	CHKD:	DWG NO.:		
.XXX ±	.XXX ±		DR: 邓琴	SCALE 1:1	SHEET 1/1	REV. X1
	UNITS: mm	QTY				
						