

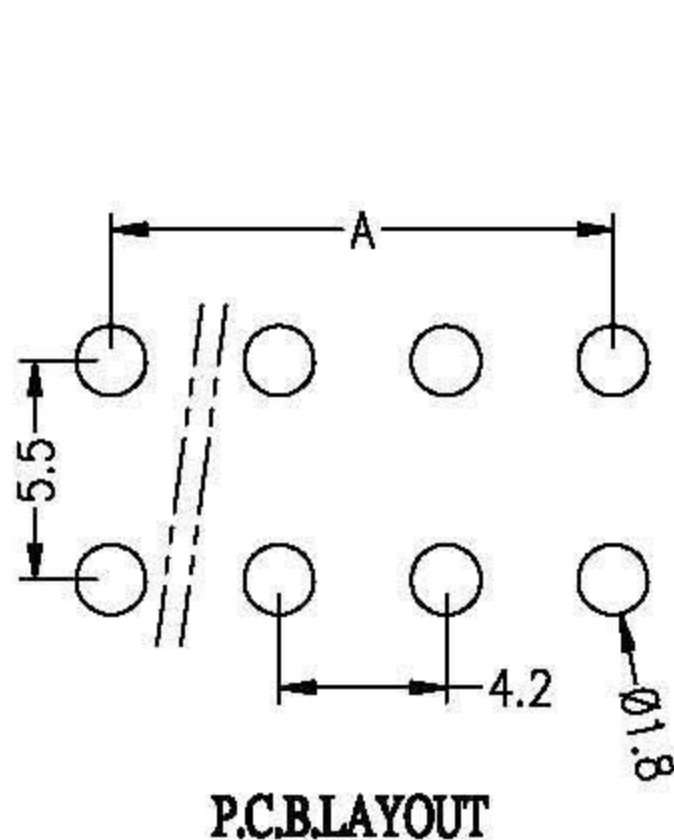
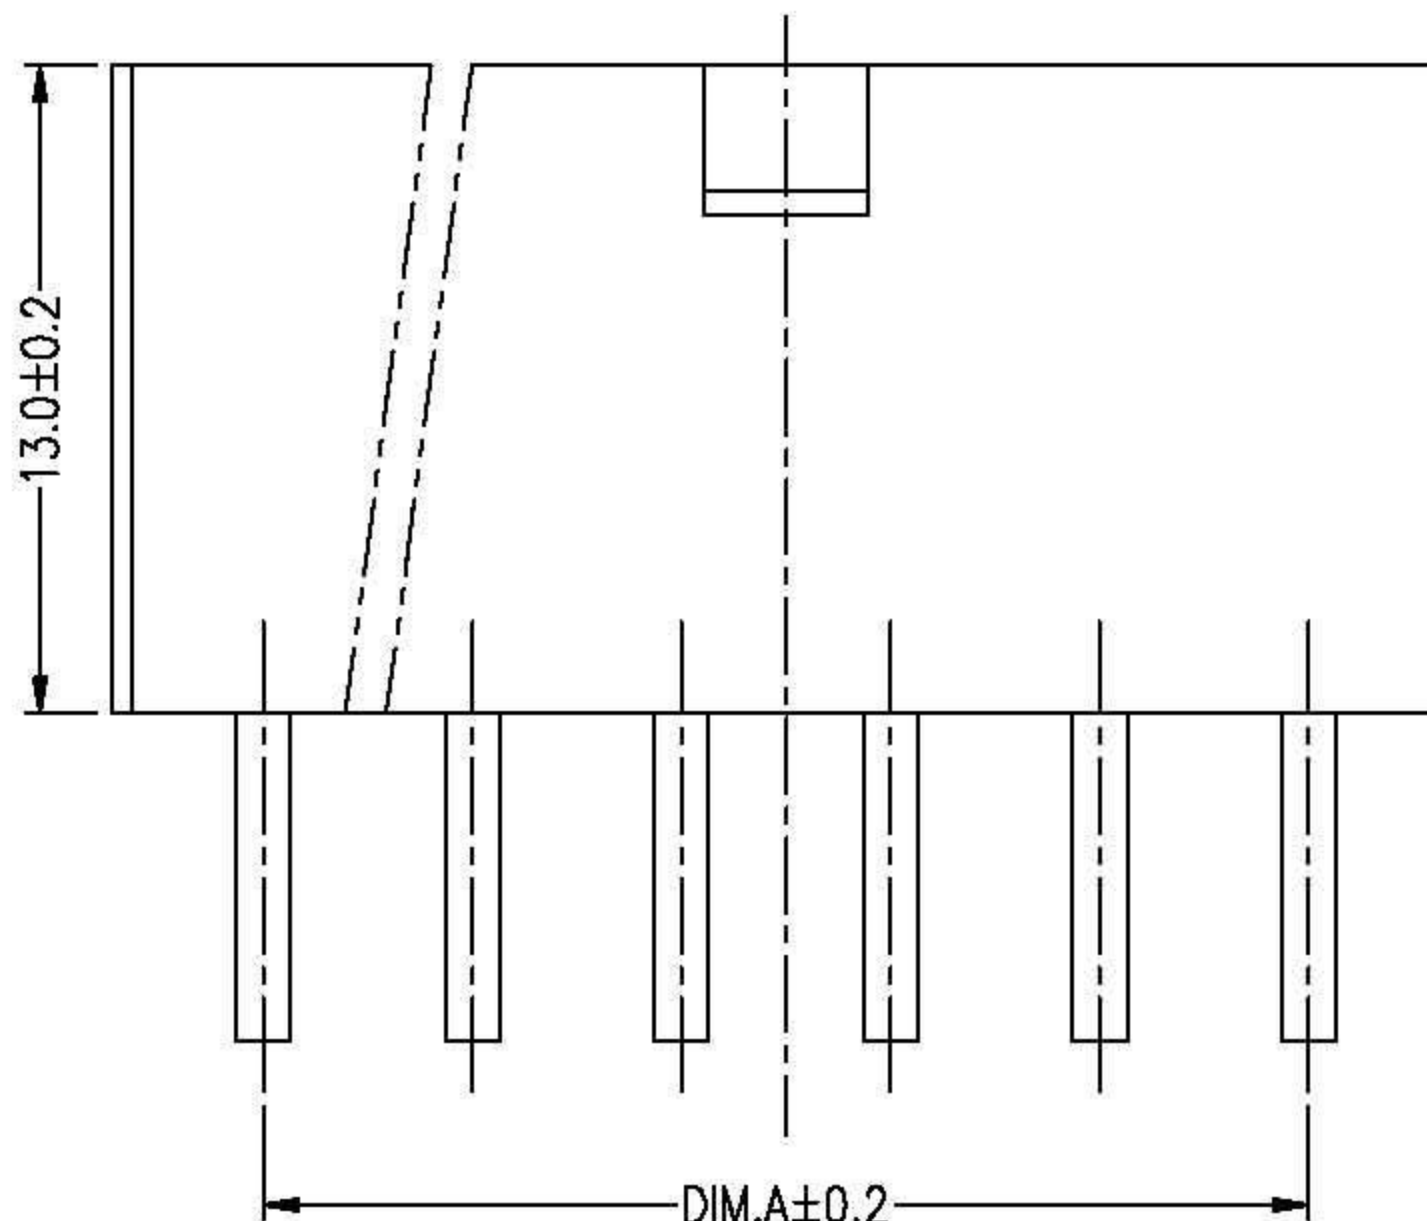


PIN	DIM	DIM.A	DIM.B
2		4.2	5.3
3		8.4	13.7
4		4.2	9.5
5		16.8	22.1
6		8.4	13.7
8		12.6	17.9
10		16.8	22.1
12		21.0	26.3
14		25.2	30.5
16		29.4	34.7
18		33.6	38.9
20		37.8	43.1
22		42.0	47.3
24		46.2	51.5

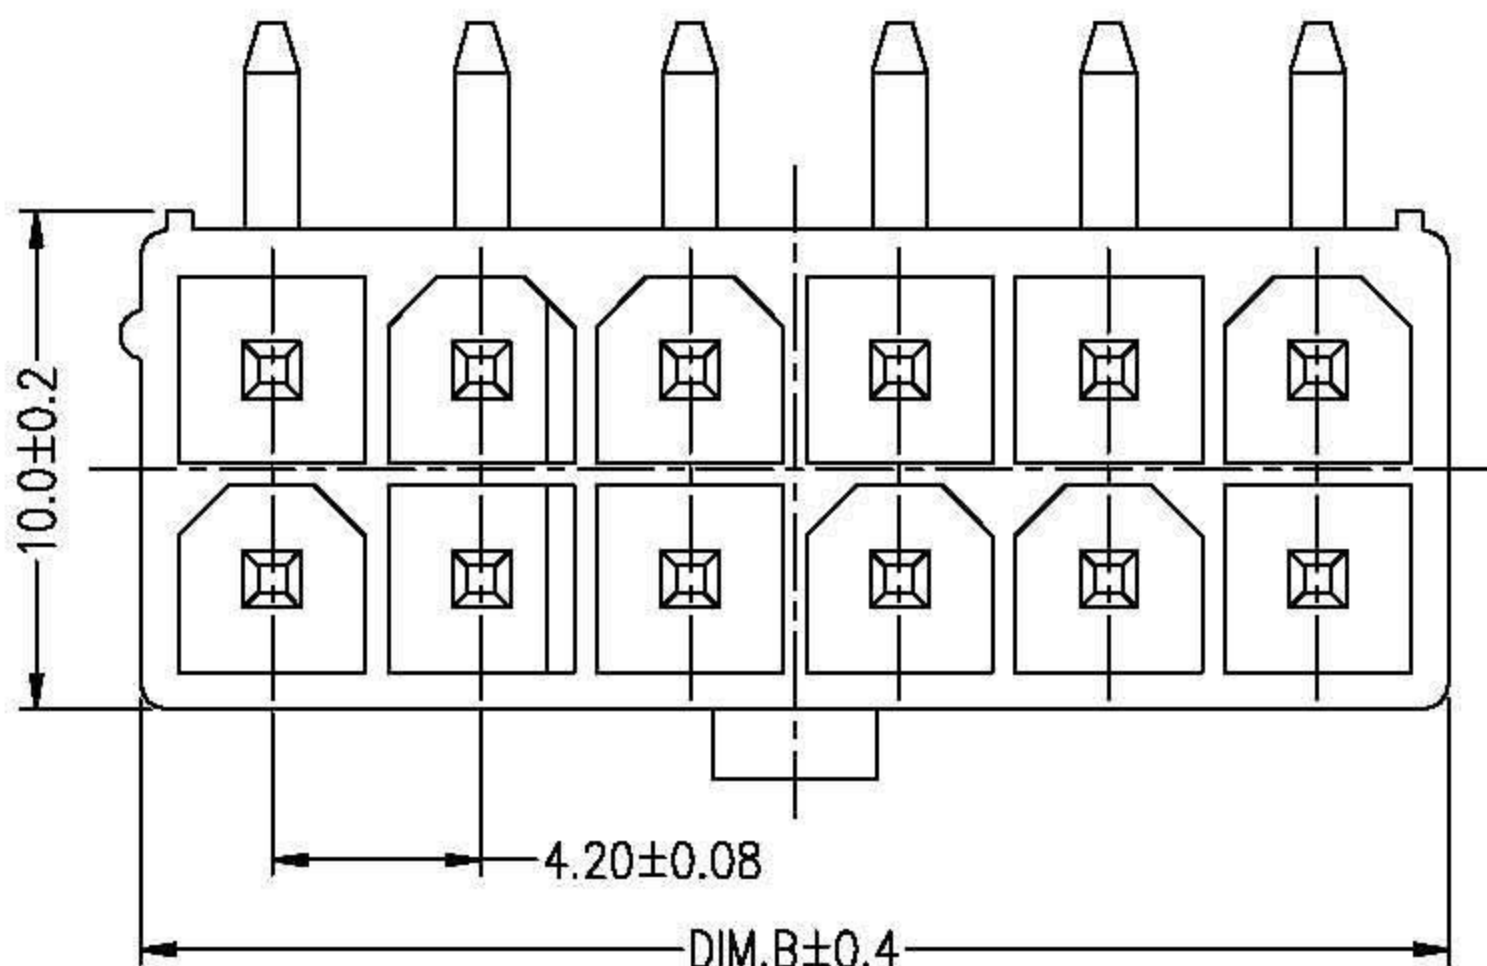

PCB LAYOUT

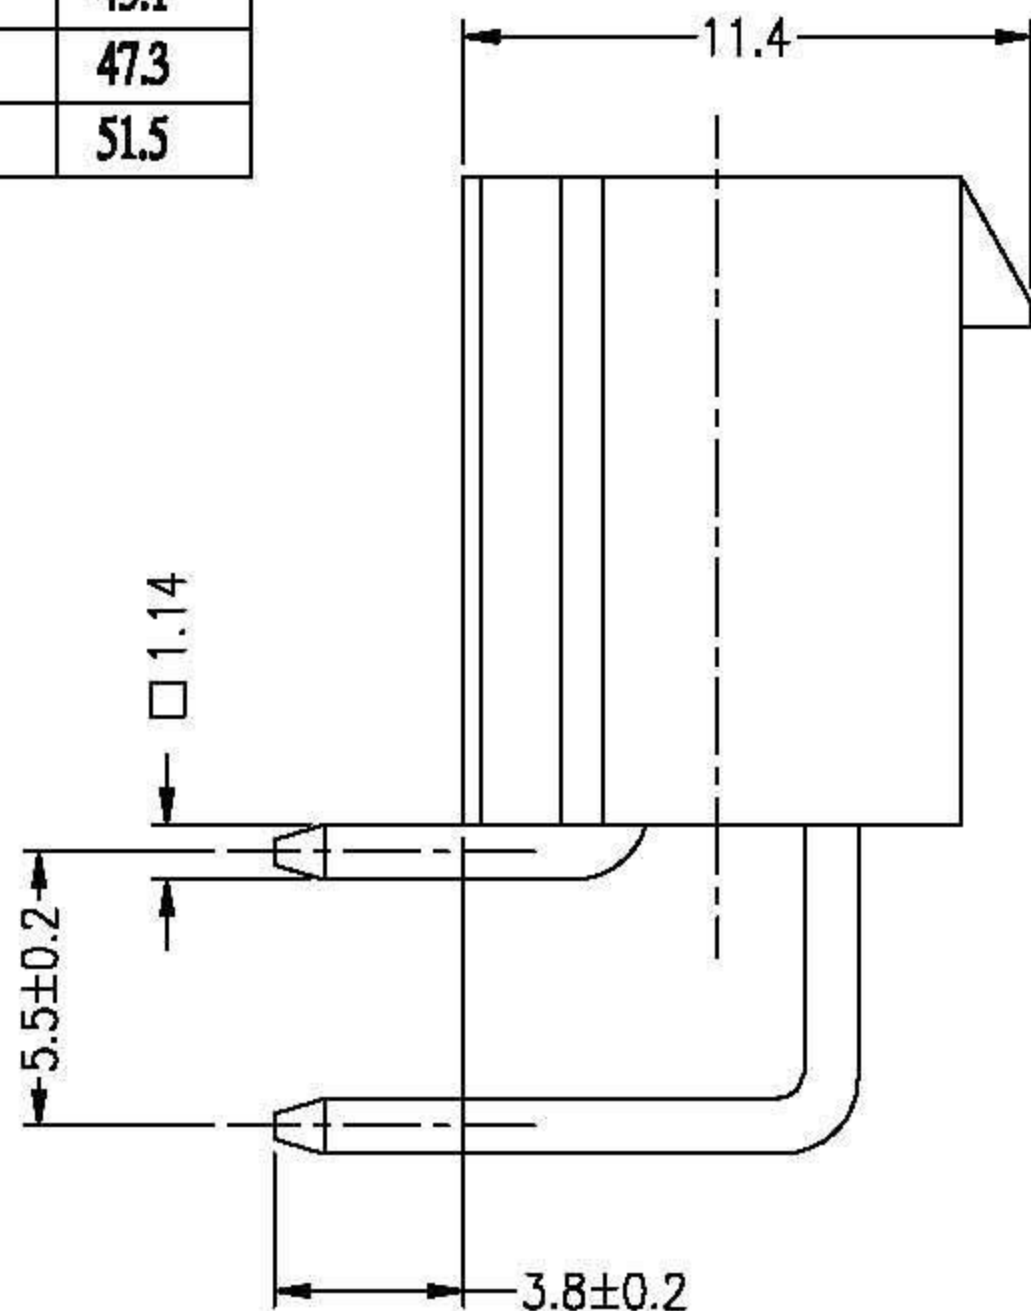

技术参数 SPECIFICATIONS

- ◆ 间距: 4.2 Pitch: 4.2
- ◆ 適用線規 : AWG#28~#22
Applicable Wire:AWG#28~#22
- ◆ 额定电压: AC,DC,250V(有效值)
Voltage rating: AC,DC,250V(rms)
- ◆ 额定电流: 5.0A
Current rating: 5.0A
- ◆ 耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆ 工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: ≥1000 MΩ
Insulation resistance: ≥1000MΩ
- ◆ 接触电阻: ≤0.015 Ω
Contact resistance: ≤0.015 Ω

材料 MATERIAL

- ◆ 絕緣座 : 尼龍 UL94-0
Housing : Nylon UL94-0
- ◆ 插針 : 黃銅
Pin : Brass

诚得信电子

GENERAL TOLERANCE	
XX. ± 0.40	XXX. ±
X. ± 0.25	.XXX ±
.X ± 0.15	X.' ± 2'
.XX ± 0.10	.X' ± 1'

SCALE	1=1
UNIT	MM
SIZE	A4

DRAWN	CHECK	APPROVE
-------	-------	---------

DATE	DATE	DATE
------	------	------

DWG. NO.	G:\DWG\Production\
PARTS NO.	5557-2*nAW弯针

TITLE	成品图
-------	-----

REV.	A
SHEET	1/1