


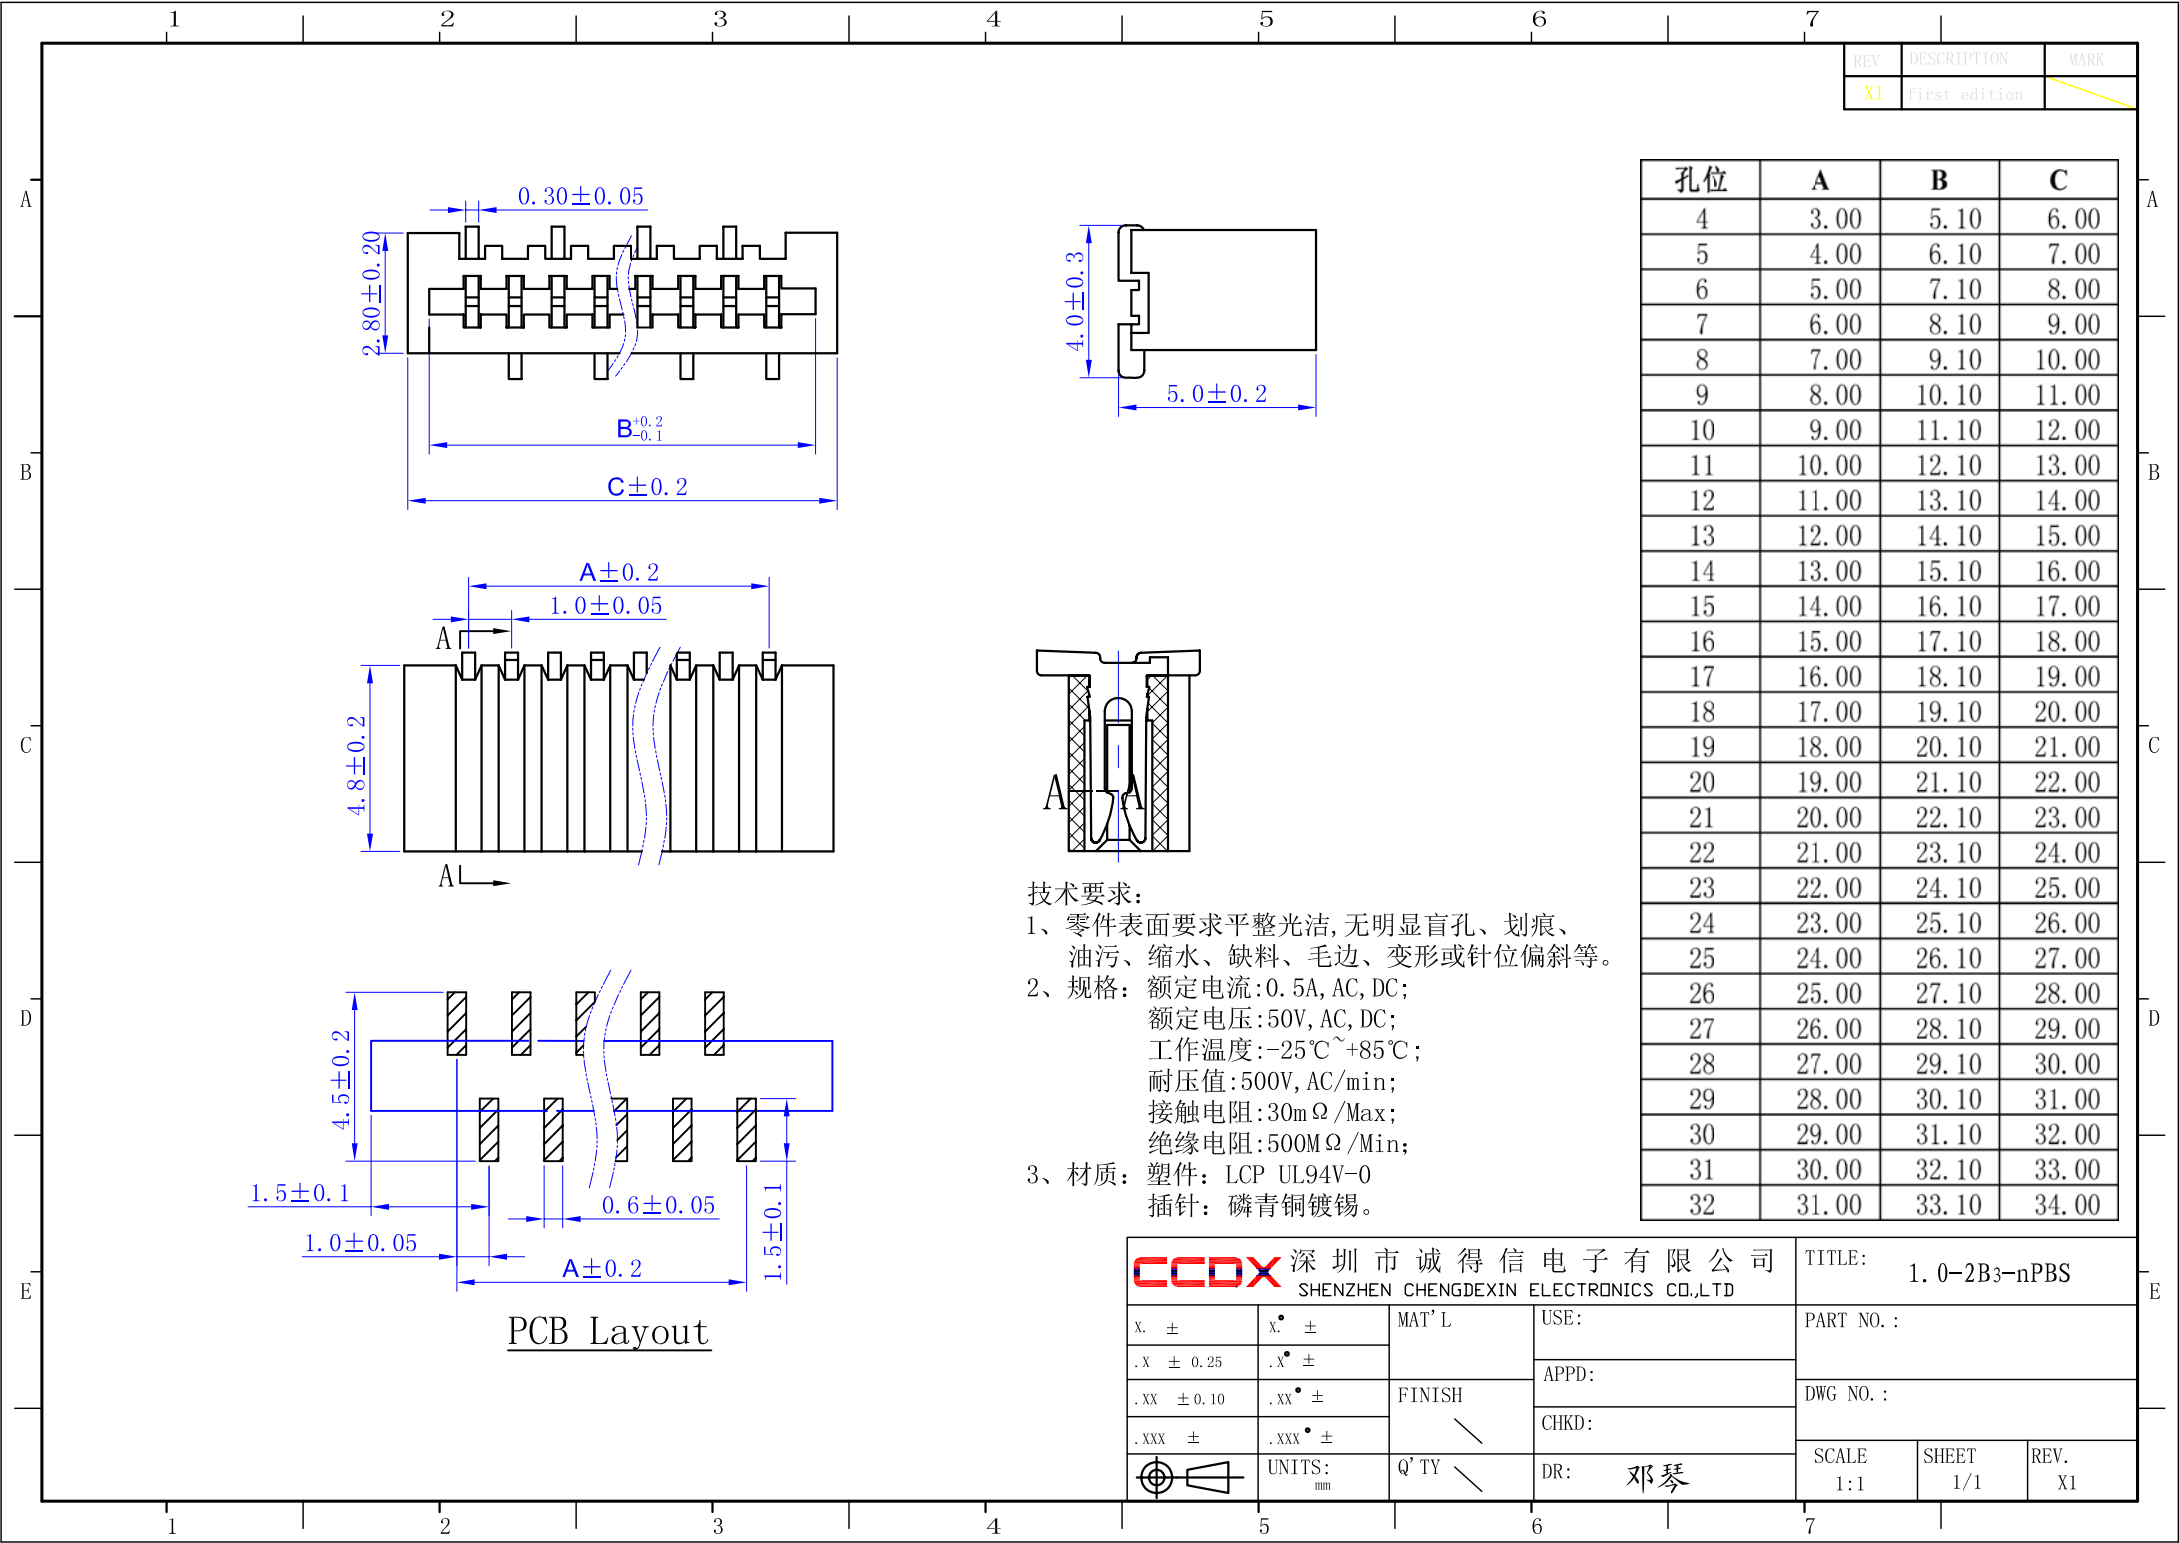

REV	DESCRIPTION	MARK
X1	First edition	


孔位	A	B	C
4	3.00	5.10	6.00
5	4.00	6.10	7.00
6	5.00	7.10	8.00
7	6.00	8.10	9.00
8	7.00	9.10	10.00
9	8.00	10.10	11.00
10	9.00	11.10	12.00
11	10.00	12.10	13.00
12	11.00	13.10	14.00
13	12.00	14.10	15.00
14	13.00	15.10	16.00
15	14.00	16.10	17.00
16	15.00	17.10	18.00
17	16.00	18.10	19.00
18	17.00	19.10	20.00
19	18.00	20.10	21.00
20	19.00	21.10	22.00
21	20.00	22.10	23.00
22	21.00	23.10	24.00
23	22.00	24.10	25.00
24	23.00	25.10	26.00
25	24.00	26.10	27.00
26	25.00	27.10	28.00
27	26.00	28.10	29.00
28	27.00	29.10	30.00
29	28.00	30.10	31.00
30	29.00	31.10	32.00
31	30.00	32.10	33.00
32	31.00	33.10	34.00

技术要求:

1、零件表面要求平整光洁,无明显盲孔、划痕、油污、缩水、缺料、毛边、变形或针位偏斜等。

2、规格: 额定电流:0.5A, AC, DC;
额定电压:50V, AC, DC;
工作温度:-25℃~+85℃;
耐压值:500V, AC/min;
接触电阻:30mΩ /Max;
绝缘电阻:500MΩ /Min;

3、材质: 塑件: LCP UL94V-0
插针: 磷青铜镀锡。

CCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: 1. 0-2B3-nPBS		
X. ±	X. ±	MAT' L	USE:	PART NO. :		
. X ± 0.25	. X ±		APPD:	DWG NO. :		
. XX ± 0.10	. XX ±	FINISH /	CHKD:	SCALE		
. XXX ±	. XXX ±		DR: 邓琴	SHEET		
	UNITS: mm	Q' TY /	REV. X1			
				1:1		
				1/1		