






REV	DESCRIPTION	MARK
X1	First edition	

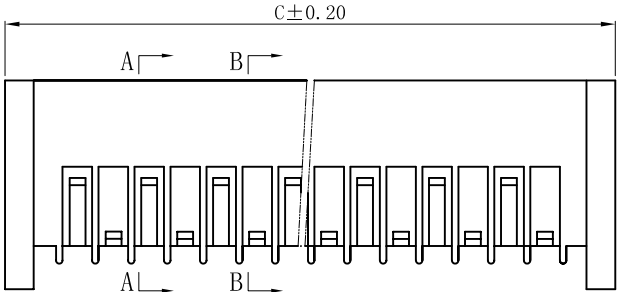


性能:

额定电流: 1A
额定电压: 200V
耐电压: 500V
绝缘电阻: 500MΩ
接触电阻: 30mΩ
工作温度: -40℃~+85℃

塑件(材质): LCP, UL94V-0;
插簧(材质): 磷青铜, 镀锡;

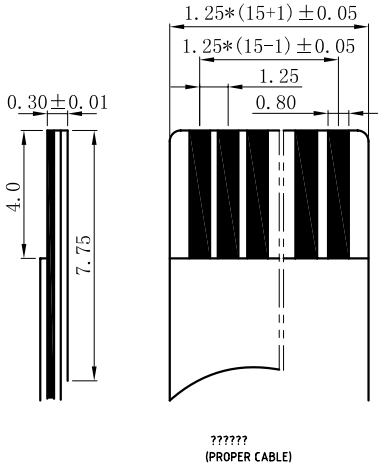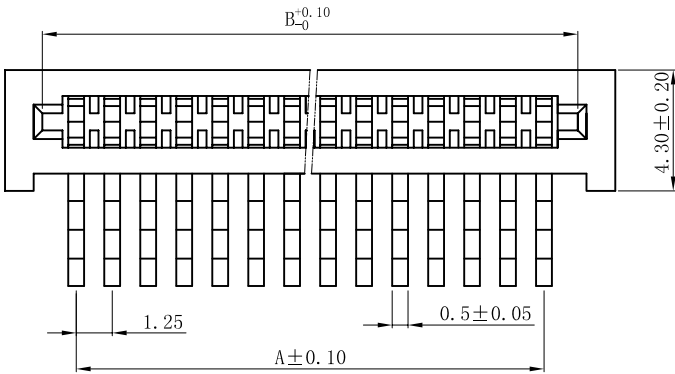

孔位	A	B	C
3	2.50	5.00	7.30
4	3.75	6.25	8.55
5	5.00	7.50	9.80
6	6.25	8.75	11.05
7	7.50	10.00	12.30
8	8.75	11.25	13.55
9	10.00	12.50	14.80
10	11.25	13.75	16.05
11	12.50	15.00	17.30
12	13.75	16.25	18.55
13	15.00	17.50	19.80
14	16.25	18.75	21.05
15	17.50	20.00	22.30
16	18.75	21.25	23.55
17	20.00	22.50	24.80
18	21.25	23.75	26.05
19	22.50	25.00	27.30
20	23.75	26.25	28.55
21	25.00	27.50	29.80
22	26.25	28.75	31.05
23	27.50	30.00	32.30
24	28.75	31.25	33.55
25	30.00	32.50	34.80
26	31.25	33.75	36.05
27	32.50	35.00	37.30
28	33.75	36.25	38.55
29	35.00	37.50	39.80
30	36.25	38.75	41.05

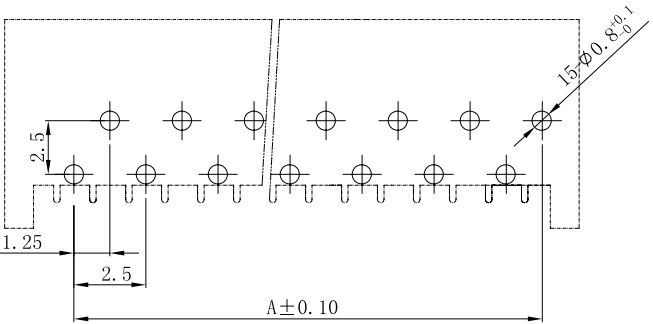

CCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO., LTD				TITLE: 1.25-3-nPW		
X. ±	X.° ±	MAT'L	USE:	CUS PART NO. :		
.X ± 0.25	.X° ±	FINISH	APPD:	DWG NO. :		
.XX ± 0.10	.XX° ±		CHKD:			
.XXX ±	.XXX° ±	Q' TY	DR: 邓琴	SCALE 1:1	SHEET 1/1	REV. X1
UNITS: mm						