

REV	DESCRIPTION	MARK
X1	First edition	

性能:

额定电流: 1A

额定电压: 200V

耐电压: 500V





绝缘电阻: 500MΩ

接触电阻: 30mΩ


工作温度: -40℃~+85℃

塑件(材质): LCP, UL94V-0(BK);

插簧(材质): 磷青铜, 镀锡;

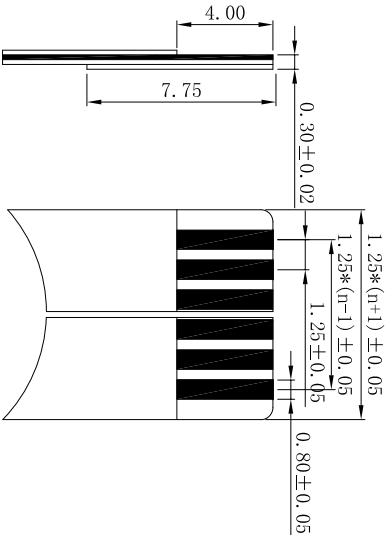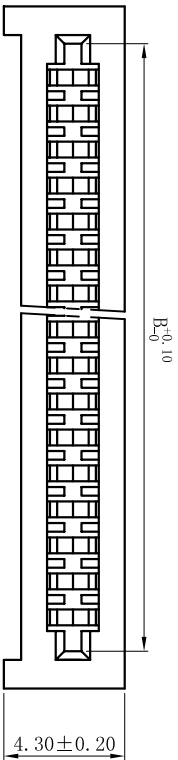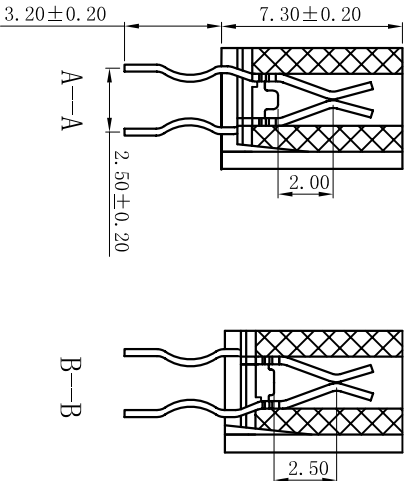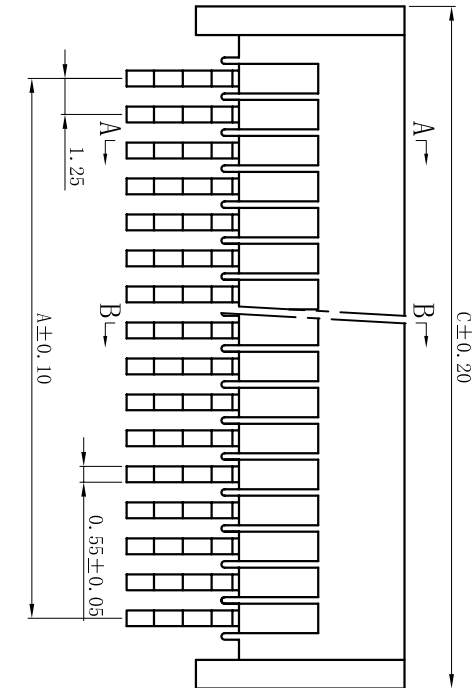

孔位	A	B	C
3	2.50	5.00	7.30
4	3.75	6.25	8.55
5	5.00	7.50	9.80
6	6.25	8.75	11.05
7	7.50	10.00	12.30
8	8.75	11.25	13.55
9	10.00	12.50	14.80
10	11.25	13.75	16.05
11	12.50	15.00	17.30
12	13.75	16.25	18.55
13	15.00	17.50	19.80
14	16.25	18.75	21.05
15	17.50	20.00	22.30
16	18.75	21.25	23.55
17	20.00	22.50	24.80
18	21.25	23.75	26.05
19	22.50	25.00	27.30
20	23.75	26.25	28.55
21	25.00	27.50	29.80
22	26.25	28.75	31.05
23	27.50	30.00	32.30
24	28.75	31.25	33.55
25	30.00	32.50	34.80
26	31.25	33.75	36.05
27	32.50	35.00	37.30
28	33.75	36.25	38.55
29	35.00	37.50	39.80
30	36.25	38.75	41.05

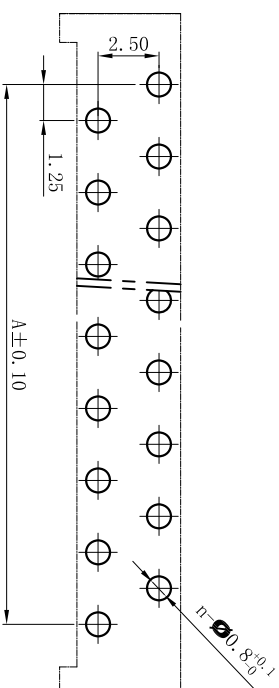

CCO	深圳市诚得信电子有限公司	TITLE: 1.25-3-nPS
SHENZHEN CHENGDEXIN ELECTRONICS CO., LTD		

X. ±	X. ±	MAT'L	USE:	CUS PART NO.:
.X ± 0.25	.X ±			
.XX ± 0.10	.XX ±	FINISH	APPD:	DWG NO.:
.XXX ±	.XXX ±		CHKD:	
UNITS: mm	Q'TY	DR:	邓琴	SCALE 1:1
				SHEET 1/1
				REV. X1