


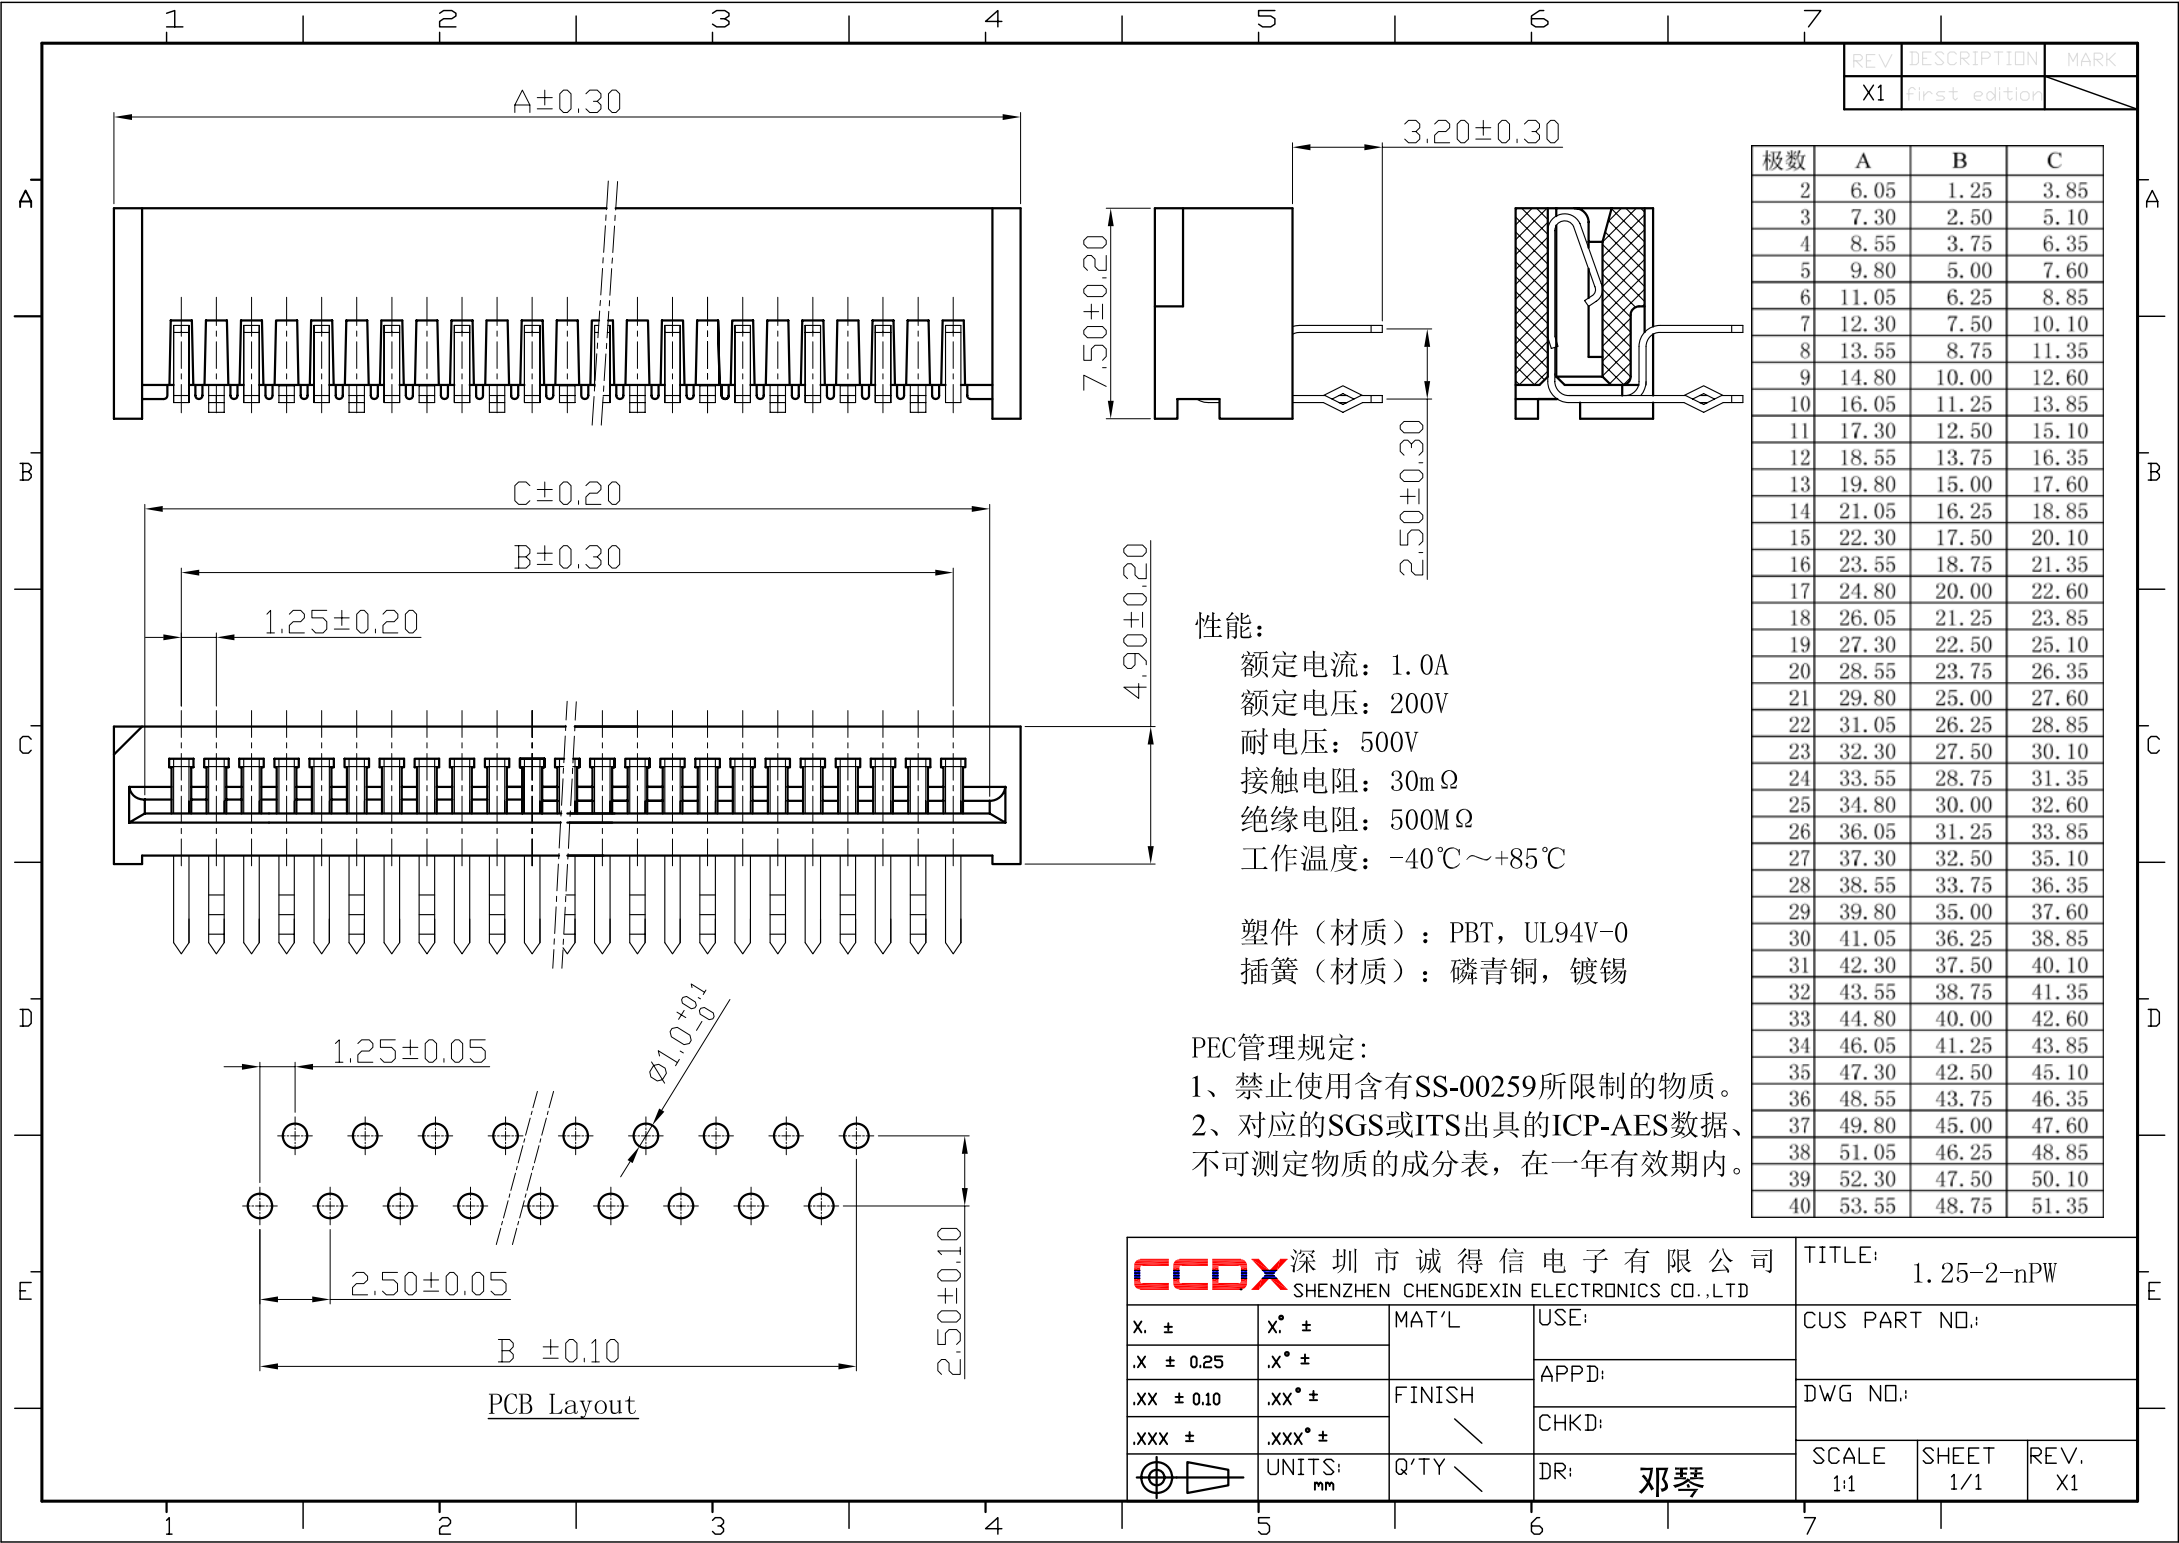

REV	DESCRIPTION	MARK
X1	First edition	

极数	A	B	C
2	6.05	1.25	3.85
3	7.30	2.50	5.10
4	8.55	3.75	6.35
5	9.80	5.00	7.60
6	11.05	6.25	8.85
7	12.30	7.50	10.10
8	13.55	8.75	11.35
9	14.80	10.00	12.60
10	16.05	11.25	13.85
11	17.30	12.50	15.10
12	18.55	13.75	16.35
13	19.80	15.00	17.60
14	21.05	16.25	18.85
15	22.30	17.50	20.10
16	23.55	18.75	21.35
17	24.80	20.00	22.60
18	26.05	21.25	23.85
19	27.30	22.50	25.10
20	28.55	23.75	26.35
21	29.80	25.00	27.60
22	31.05	26.25	28.85
23	32.30	27.50	30.10
24	33.55	28.75	31.35
25	34.80	30.00	32.60
26	36.05	31.25	33.85
27	37.30	32.50	35.10
28	38.55	33.75	36.35
29	39.80	35.00	37.60
30	41.05	36.25	38.85
31	42.30	37.50	40.10
32	43.55	38.75	41.35
33	44.80	40.00	42.60
34	46.05	41.25	43.85
35	47.30	42.50	45.10
36	48.55	43.75	46.35
37	49.80	45.00	47.60
38	51.05	46.25	48.85
39	52.30	47.50	50.10
40	53.55	48.75	51.35

性能:
额定电流: 1.0A
额定电压: 200V
耐电压: 500V
接触电阻: 30mΩ
绝缘电阻: 500MΩ
工作温度: -40℃~+85℃

塑件(材质): PBT, UL94V-0
插簧(材质): 磷青铜, 镀锡

PEC管理规定:
1、禁止使用含有SS-00259所限制的物质。
2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表, 在一年有效期内。

CCDX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: 1.25-2-nPW		
X. ±	X°. ±	MAT'L	USE:	CUS PART NO.:		
.X ± 0.25	.X°. ±			APPD:		
.XX ± 0.10	.XX°. ±	FINISH	CHKD:	DWG NO.:		
.XXX ±	.XXX°. ±			SCALE		
	UNITS: mm	Q'TY	DR: 邓琴	1:1	SHEET 1/1	REV. X1