

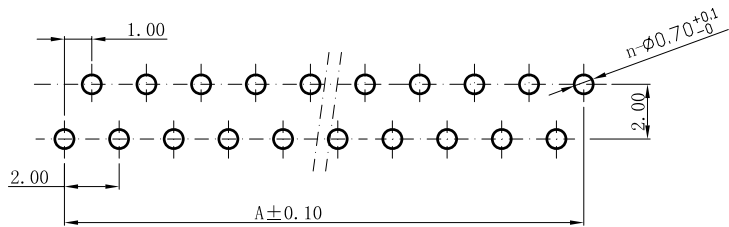
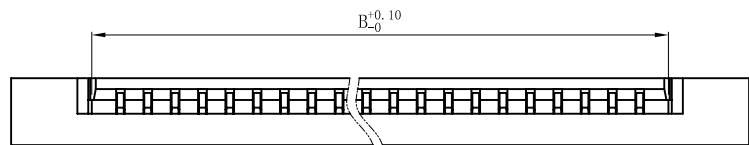
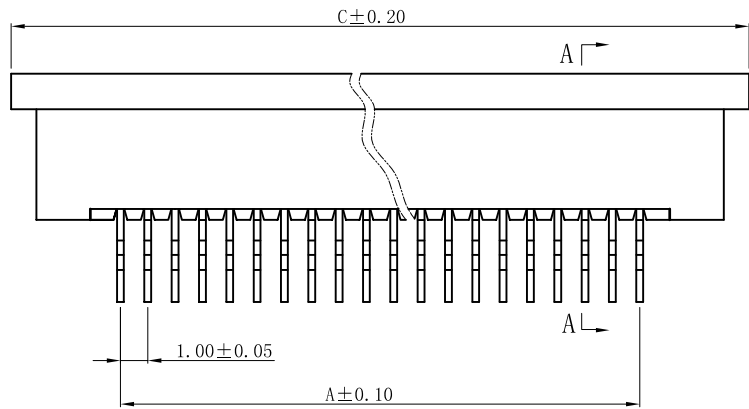




REV	DESCRIPTION	MARK
X1	first edition	



印制电路板 $\delta=0.8\sim1.6$
印制电路板公差: $\pm0.05\text{mm}$

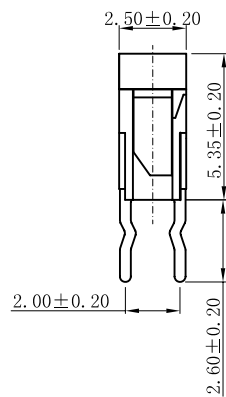

A --- A

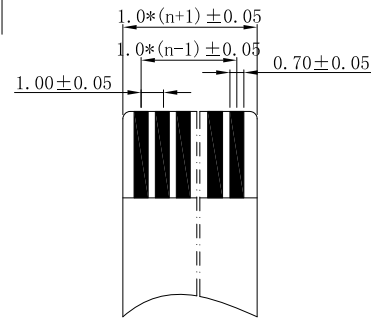

性能:

额定电流: 0.5A
额定电压: 50V
耐电压: 500V
接触电阻: 30m Ω
绝缘电阻: 500M Ω
工作温度: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$
锁条(材质): LCP, UL94V-0
基座(材质): LCP, UL94V-0
插簧(材质): 磷青铜, 镀锡
焊片(材质): 磷青铜, 镀锡

孔位	A	B	C
4	3.00	5.10	11.00
5	4.00	6.10	12.00
6	5.00	7.10	13.00
7	6.00	8.10	14.00
8	7.00	9.10	15.00
9	8.00	10.10	16.00
10	9.00	11.10	17.00
11	10.00	12.10	18.00
12	11.00	13.10	19.00
13	12.00	14.10	20.00
14	13.00	15.10	21.00
15	14.00	16.10	22.00
16	15.00	17.10	23.00
17	16.00	18.10	24.00
18	17.00	19.10	25.00
19	18.00	20.10	26.00
20	19.00	21.10	27.00
21	20.00	22.10	28.00
22	21.00	23.10	29.00
23	22.00	24.10	30.00
24	23.00	25.10	31.00
25	24.00	26.10	32.00
26	25.00	27.10	33.00
27	26.00	28.10	34.00
28	27.00	29.10	35.00
29	28.00	30.10	36.00
30	29.00	31.10	37.00
31	30.00	32.10	38.00
32	31.00	33.10	39.00
33	32.00	34.10	40.00
34	33.00	35.10	41.00
35	34.00	36.10	42.00

CCDX 深圳市成德信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO. : 1.0S-12-nP	
X. $\pm$	X. $\pm$	MAT' L	APPD:	CUS PART NO. :	
.X ± 0.20	.X $\pm 0.1^{\circ}$	FINISH	CHKD:	DATE	
.XX ± 0.10	.XX $\pm 0.05^{\circ}$			VERSION VI.0	
.XXX ± 0.05	.XXX $\pm$			SCALE 1:1	
	UNITS: mm	Q' TY	DR: 邓琴	SHEET 1/1	REV. X1