
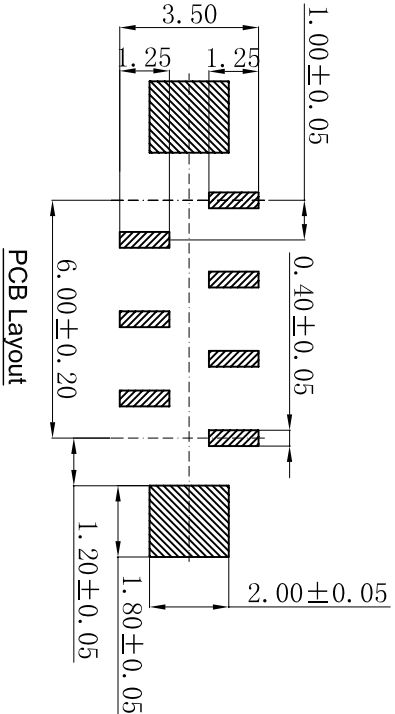
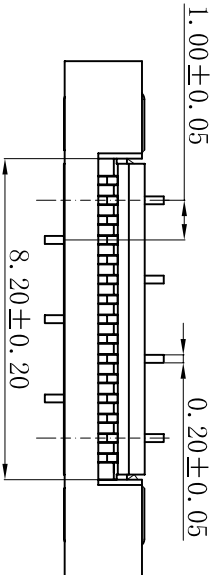




REV	DESCRIPTION	MARK
X1	first edition	

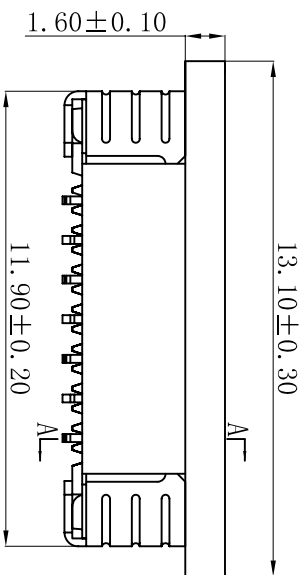

性能:

额定电流: 0.5A
额定电压: 50V AC, DC
耐电压: 200V
接触电阻: 30mΩ
绝缘电阻: 500MΩ
工作温度: -20℃~+85℃

塑件 (材质): LCP, UL94V-0
锁条 (材质): LCP, UL94V-0
插簧 (材质): 磷青铜, 镀锡
焊片 (材质): 磷青铜, 镀锡

CCD				深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO.: FPC 1.0S-10-7PBS			
X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:				VERSION			
.X ± 0.20	.X ± 0.1°	✓		DATE				VI.0			
.XX ± 0.10	.XX ± 0.05°	FINISH	CHKD:	2017.06.03				SHEET			
.XXX ±	.XXX ±	DR:	刘婷	SCALE				REV.			
UNIT: mm	UNIT: mm	QTY	1	1:1				1/1			
PCB Layout				1:1				XI			