
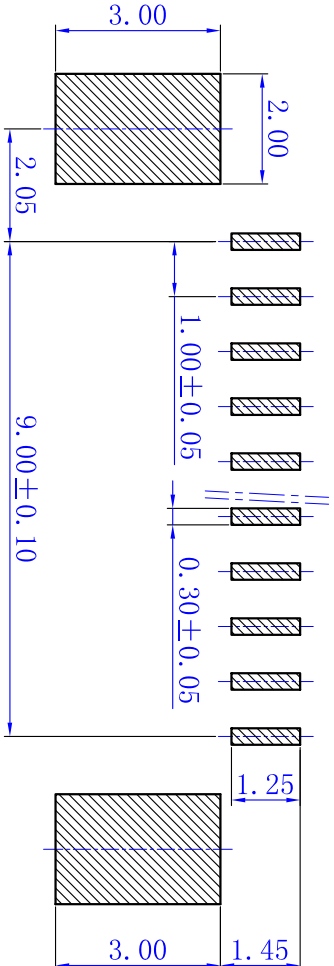
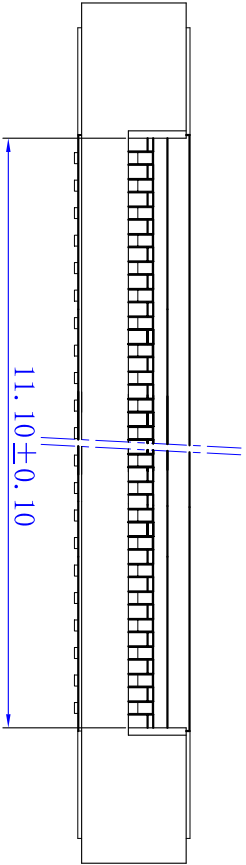
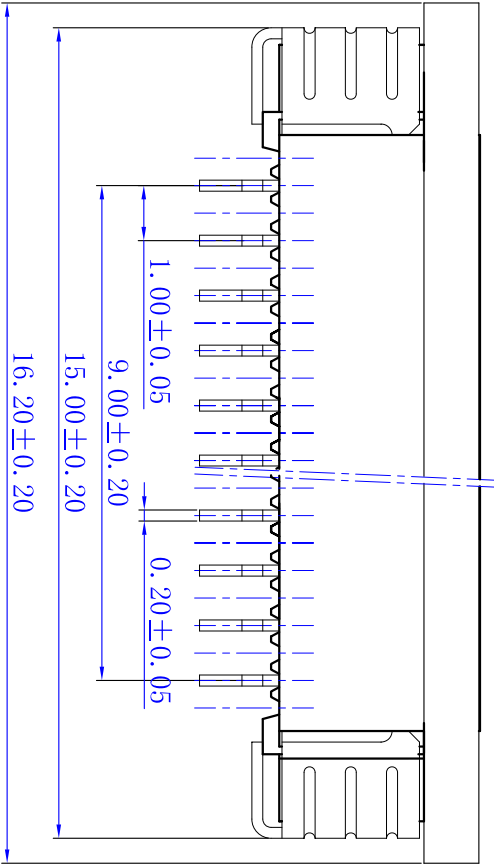




REV	DESCRIPTION	MARK
X1	first edition	

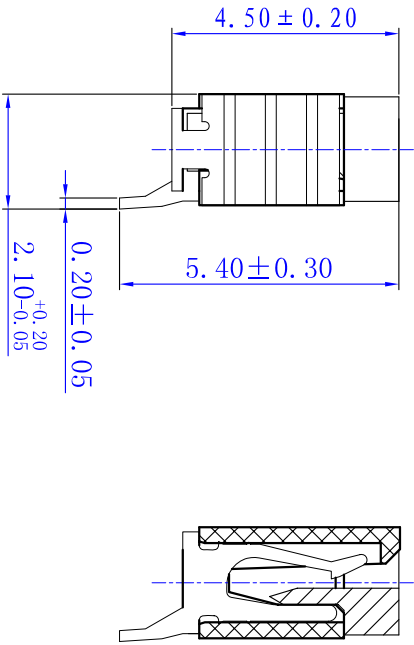

PCB Layout

性能:

- 额定电流: 0.4A
- 额定电压: 50V
- 耐压: 200V
- 接触电阻: 20mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -20℃~+85℃
- 塑件 (材质): LCP, UL94V-0
- 锁条 (材质): LCP, UL94V-0
- 插簧 (材质): 磷青铜, 镀锡
- 锁扣 (材质): 磷青铜, 镀锡

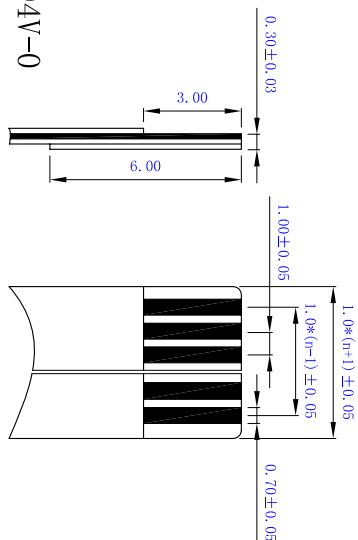

适用FFC寸法
Applicable FFC

CCOXX 深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				PART NO.: 1.0S-10S-10PWB			
X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:			
.X ± 0.1	.X ± 0.1°	✓					
.XX ± 0.05	.XX ± 0.05°	FINISH	CHKD:	DATE	VERSION		
.XXX ±	.XXX ±	✓			V1.0		
UNITS: mm	Q'TY	DR: 蔡永青	SCALE 1:1	SHEET 1/1	REV. X1		