

REV	DESCRIPTION	MARK
X1	first edition	

性能:

额定电流: 0.5A

额定电压: 50V

耐压: 500V

绝缘电阻: 800MΩ

接触电阻: 20mΩ

工作温度: -20℃~+85℃

材质:



塑件 (材质): LCP, UL94V-0;

锁条 (材质): LCP, UL94V-0;

插簧 (材质): 磷青铜, 镀锡;

焊片 (材质): 磷青铜, 镀锡;

孔位	A	B	C	D
4	2.4	4	9.6	10.3
5	3.2	4.8	10.4	11.1
6	4	5.6	11.2	11.9
7	4.8	6.4	12	12.7
8	5.6	7.2	12.8	13.5
9	6.4	8	13.6	14.3
10	7.2	8.8	14.4	15.1
11	8	9.6	15.2	15.9
12	8.8	10.4	16	16.7
13	9.6	11.2	16.8	17.5
14	10.4	12	17.6	18.3
15	11.2	12.8	18.4	19.1
16	12	13.6	19.2	19.9
17	12.8	14.4	20	20.7
18	13.6	15.2	20.8	21.5
19	14.4	16	21.6	22.3
20	15.2	16.8	22.4	23.1
21	16	17.6	23.2	23.9
22	16.8	18.4	24	24.7
23	17.6	19.2	24.8	25.5
24	18.4	20	25.6	26.3
25	19.2	20.8	26.4	27.1
26	20	21.6	27.2	27.9
27	20.8	22.4	28	28.7
28	21.6	23.2	28.8	29.5
29	22.4	24	29.6	30.3
30	23.2	24.8	30.4	31.1
31	24	25.6	31.2	31.9
32	24.8	26.4	32	32.7
33	25.6	27.2	32.8	33.5
34	26.4	28	33.6	34.3
35	27.2	28.8	34.4	35.1

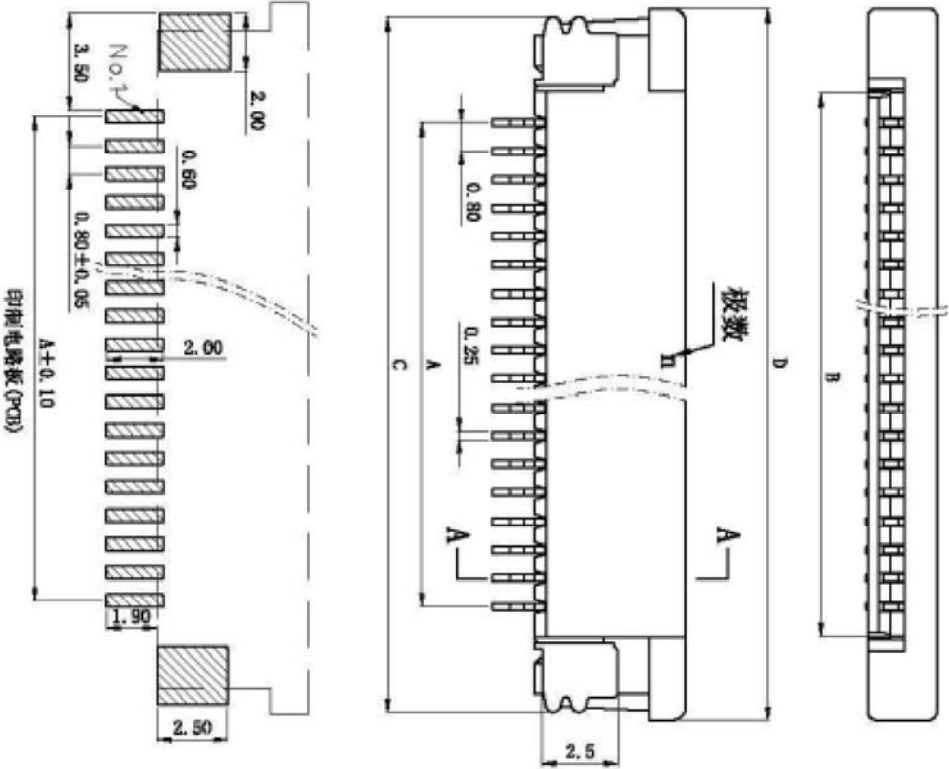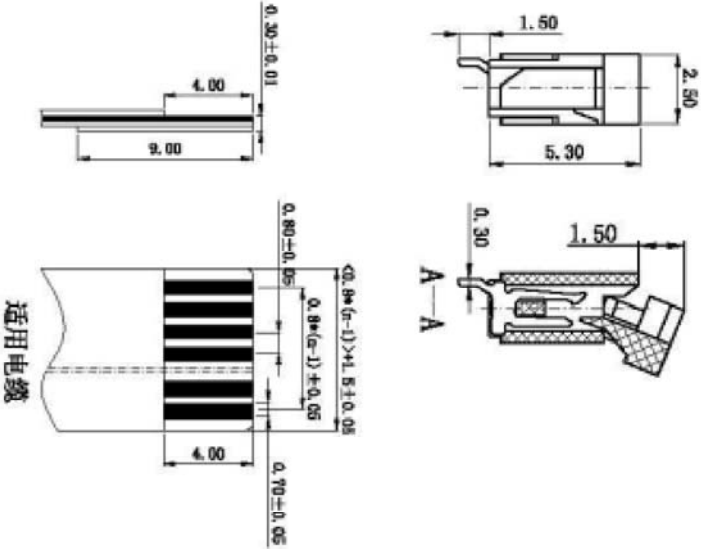

CCCDX				深圳市诚得信电子有限公司 SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD				TITLE: 0.8S-1X-nPW/B		
X. ±		X° ±		MAT'L		USE:		CUS PART NO:		
.X ± 0.20		.X° ±		/		APPD:		DWG NO.:		
.XX ± 0.10		.XX° ±		FINISH		CHKD:		SCALE		
.XXX ±		.XXX° ±		/		DR:		SHEET		
		UNITS: mm		Q'TY		邓琴		1/1		
								REV. X1		