


REV	DESCRIPTION	MARK
X1	first edition	

孔数	A	B	C	D
4	8.50	1.50	2.60	7.60
5	9.00	2.00	3.10	8.10
6	9.50	2.50	3.60	8.60
7	10.00	3.00	4.10	9.10
8	10.50	3.50	4.60	9.60
9	11.00	4.00	5.10	10.10
10	11.50	4.50	5.60	10.60
11	12.00	5.00	6.10	11.10
12	12.50	5.50	6.60	11.60
13	13.00	6.00	7.10	12.10
14	13.50	6.50	7.60	12.60
15	14.00	7.00	8.10	13.10
16	14.50	7.50	8.60	13.60
17	15.00	8.00	9.10	14.10
18	15.50	8.50	9.60	14.60
19	16.00	9.00	10.10	15.10
20	16.50	9.50	10.60	15.60
21	17.00	10.00	11.10	16.10
22	17.50	10.50	11.60	16.60
23	18.00	11.00	12.10	17.10
24	18.50	11.50	12.60	17.60
25	19.00	12.00	13.10	18.10
26	19.50	12.50	13.60	18.60
27	20.00	13.00	14.10	19.10
28	20.50	13.50	14.60	19.60
29	21.00	14.00	15.10	20.10
30	21.50	14.50	15.60	20.60
31	22.00	15.00	16.10	21.10
32	22.50	15.50	16.60	21.60
33	23.00	16.00	17.10	22.10
34	23.50	16.50	17.60	22.60
35	24.00	17.00	18.10	23.10
36	24.50	17.50	18.60	23.60
37	25.00	18.00	19.10	24.10
38	25.50	18.50	19.60	24.60
39	26.00	19.00	20.10	25.10
40	26.50	19.50	20.60	25.60
41	27.00	20.00	21.10	26.10
42	27.50	20.50	21.60	26.60
43	28.00	21.00	22.10	27.10
44	28.50	21.50	22.60	27.60
45	29.00	22.00	23.10	28.10
46	29.50	22.50	23.60	28.60
47	30.00	23.00	24.10	29.10
48	30.50	23.50	24.60	29.60
49	31.00	24.00	25.10	30.10
50	31.50	24.50	25.60	30.60

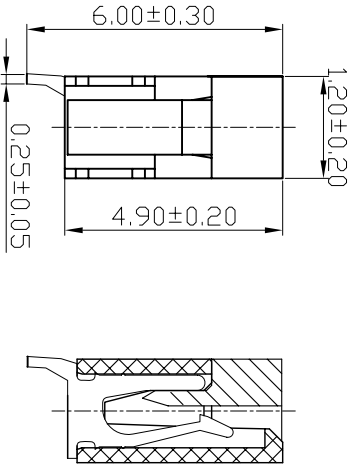

性能:

额定电流: 0.5A

额定电压: 50V AC, DC

耐电压: 200V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

塑件 (材质): LCP, UL94V-0

锁条 (材质): LCP, UL9V-0


插簧 (材质): 磷青铜, 镀锡

焊片 (材质): 磷青铜, 镀锡

CCOXX 深圳市诚得信电子有限公司
SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD

PART NO.: 0.5S-13S-nPWB
CUS PART NO.:

PCB Layout

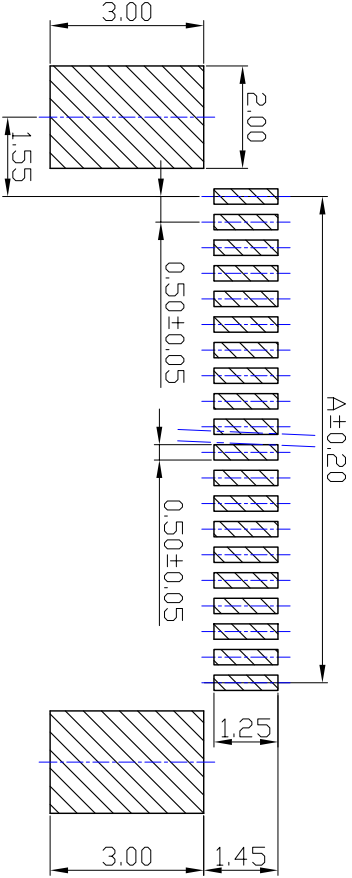

X. ±	X. ±	MAT'L	APPD:	CUS PART NO.:
X. ± 0.1	X. ± 0.1	∖		
.XX ± 0.05	.XX ± 0.05	FINISH	CHKD:	DATE
XXX ±	XXX ±	Q'TY	DR: 邓琴	VERSION V1.0
UNIT: mm				SCALE 1:1
				SHEET 1/1
				REV. X1