


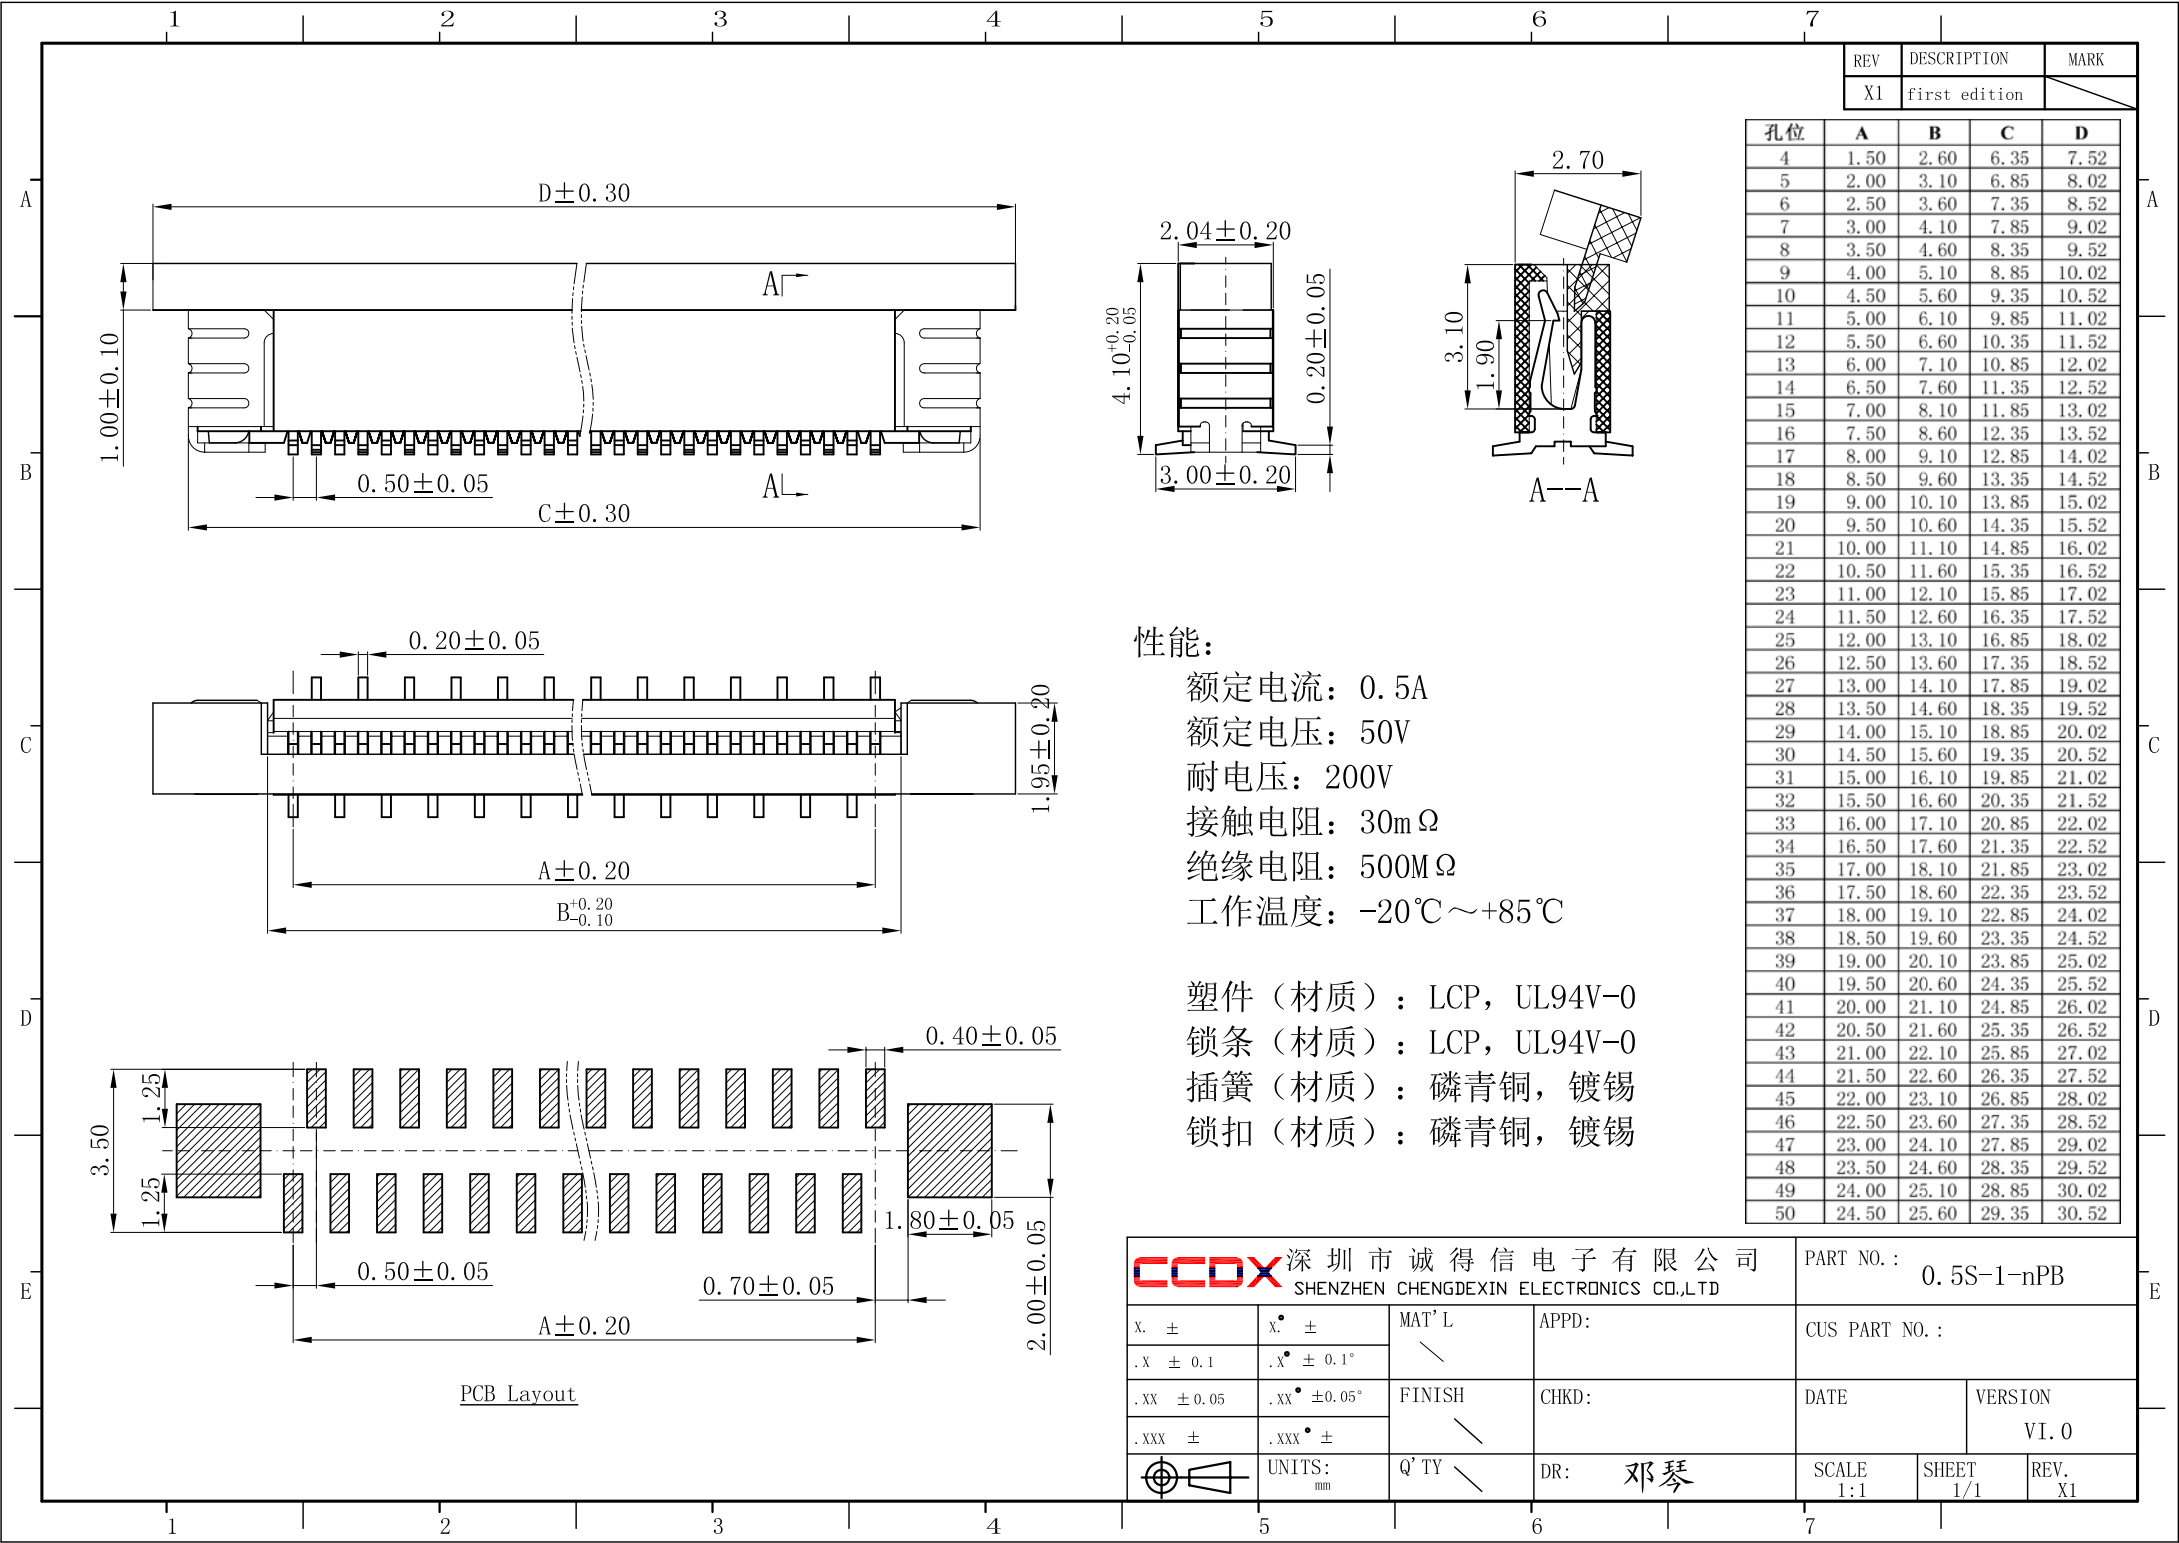

REV	DESCRIPTION	MARK
X1	first edition	

孔位	A	B	C	D
4	1.50	2.60	6.35	7.52
5	2.00	3.10	6.85	8.02
6	2.50	3.60	7.35	8.52
7	3.00	4.10	7.85	9.02
8	3.50	4.60	8.35	9.52
9	4.00	5.10	8.85	10.02
10	4.50	5.60	9.35	10.52
11	5.00	6.10	9.85	11.02
12	5.50	6.60	10.35	11.52
13	6.00	7.10	10.85	12.02
14	6.50	7.60	11.35	12.52
15	7.00	8.10	11.85	13.02
16	7.50	8.60	12.35	13.52
17	8.00	9.10	12.85	14.02
18	8.50	9.60	13.35	14.52
19	9.00	10.10	13.85	15.02
20	9.50	10.60	14.35	15.52
21	10.00	11.10	14.85	16.02
22	10.50	11.60	15.35	16.52
23	11.00	12.10	15.85	17.02
24	11.50	12.60	16.35	17.52
25	12.00	13.10	16.85	18.02
26	12.50	13.60	17.35	18.52
27	13.00	14.10	17.85	19.02
28	13.50	14.60	18.35	19.52
29	14.00	15.10	18.85	20.02
30	14.50	15.60	19.35	20.52
31	15.00	16.10	19.85	21.02
32	15.50	16.60	20.35	21.52
33	16.00	17.10	20.85	22.02
34	16.50	17.60	21.35	22.52
35	17.00	18.10	21.85	23.02
36	17.50	18.60	22.35	23.52
37	18.00	19.10	22.85	24.02
38	18.50	19.60	23.35	24.52
39	19.00	20.10	23.85	25.02
40	19.50	20.60	24.35	25.52
41	20.00	21.10	24.85	26.02
42	20.50	21.60	25.35	26.52
43	21.00	22.10	25.85	27.02
44	21.50	22.60	26.35	27.52
45	22.00	23.10	26.85	28.02
46	22.50	23.60	27.35	28.52
47	23.00	24.10	27.85	29.02
48	23.50	24.60	28.35	29.52
49	24.00	25.10	28.85	30.02
50	24.50	25.60	29.35	30.52

性能:

- 额定电流: 0.5A
- 额定电压: 50V
- 耐电压: 200V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -20℃~+85℃

- 塑件 (材质): LCP, UL94V-0
- 锁条 (材质): LCP, UL94V-0
- 插簧 (材质): 磷青铜, 镀锡
- 锁扣 (材质): 磷青铜, 镀锡

CCDX 深圳市诚得信电子有限公司
SHENZHEN CHENGDEXIN ELECTRONICS CO.,LTD

X. ±	X.° ±	MAT' L	APPD:
.X ± 0.1	.X° ± 0.1°	—	
.XX ± 0.05	.XX° ± 0.05°	FINISH	CHKD:
.XXX ±	.XXX° ±	—	
UNITS: mm	Q' TY	DR: 邓琴	SCALE 1:1

PART NO.: 0.5S-1-nPB

CUS PART NO.:

DATE

VERSION
VI.0

SHEET
1/1

REV.
X1